



## AMP Superseal 1.5 2-polig/3-polig

### Produktmerkmale

- Passend zum Winkelsensor 424A

### Technische Zeichnung

BILD 1/3

L0.C00.B01

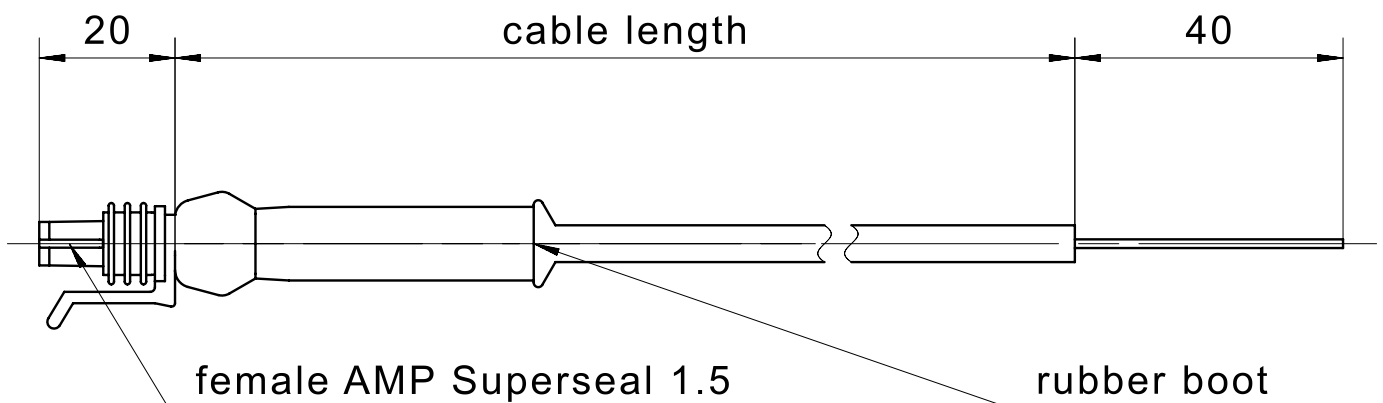


BILD 2/3

**L0BC00.B01**

**female AMP  
Superseal 1.5**



**L0CC00.B01**

**female AMP  
Superseal 1.5**



BILD 3/3

**L0BC00.B01**

1 ) ————— BU

2 ) ————— BN

**L0CC00.B01**

1 ) ————— BU

2 ) ————— BN

3 ) ————— BK

## Produktoptionen

BILD 1/1

### ORDERING KEY

L0			AMP Superseal 1.5
	B		Sheath material PVC, grey, 2-pin
	C		Sheath material PVC, grey, 3-pin
		C001B01	Cable length 1m ± 30mm
		C003B01	Cable length 3m ± 40mm
		C005B01	Cable length 5m ± 60mm
		C000B01	Cable length 10m ± 80mm
			Other cable materials and cable lengths on request

## Artikel-Merkmale

Attribute	L0BC...B01	L0CC...B01
Kabelmaterial	PVC	
Betriebstemperatur min.	-25 °C	
Betriebstemperatur max.	70 °C	
Lagertemperatur min.	-25 °C	
Lagertemperatur max.	70 °C	
Steckertyp	AMP-Superseal Buchse	
Kabeldurchmesser	5,7 +/-0,1 mm	5,5 +/-0,2 mm
Polanzahl	2	3
Litzenanzahl	2	3
Litzenquerschnitt	0,5 mm²	
Kabellänge	wählbar (1m, 3m, 5m, 10m)	