elobau GmbH & Co. KG
Zeppelinstr. 44
88299 Leutkirch, Germany

Tel.: +49 (0) 7561 970-0
Fax: +49 (0) 7561 970-100



Sensor de segurança magnético 166


O sensor de segurança magnético 166 possui um design que oferece flexibilidade no posicionamento do cabo do sensor, podendo ser posicionado em até 3 diferentes posições.

Especificação Técnica

- Sinal de saída à cabo, podendo ser montado em até 3 posições.
- 3 sentidos de atuação
- Dupla fixação permite que o sensor seja posicionado tanto do lado direito como esquerdo da porta
- Atuador magnético 30426613 pode ser pode ser posicionado de acordo com a aplicação

Desenho técnico

IMAGE 1/3

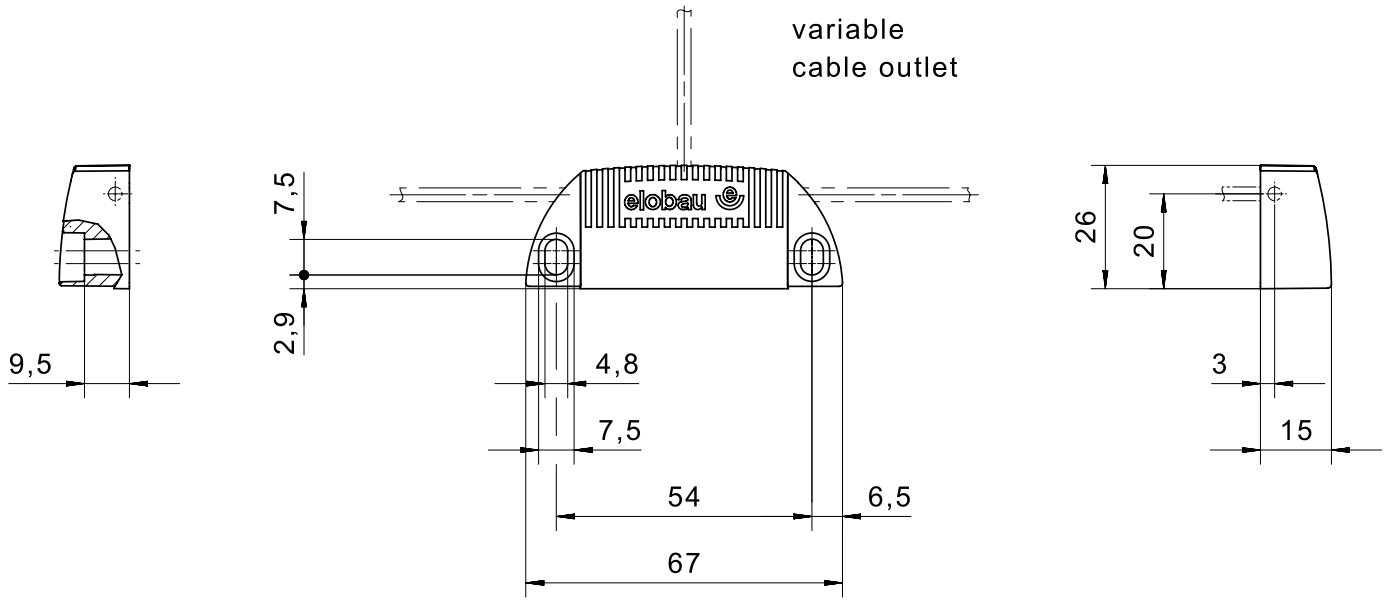

elobau GmbH & Co. KG
Zeppelinstr. 44
88299 Leutkirch, Germany

Tel.: +49 (0) 7561 970-0
Fax: +49 (0) 7561 970-100

IMAGE 2/3


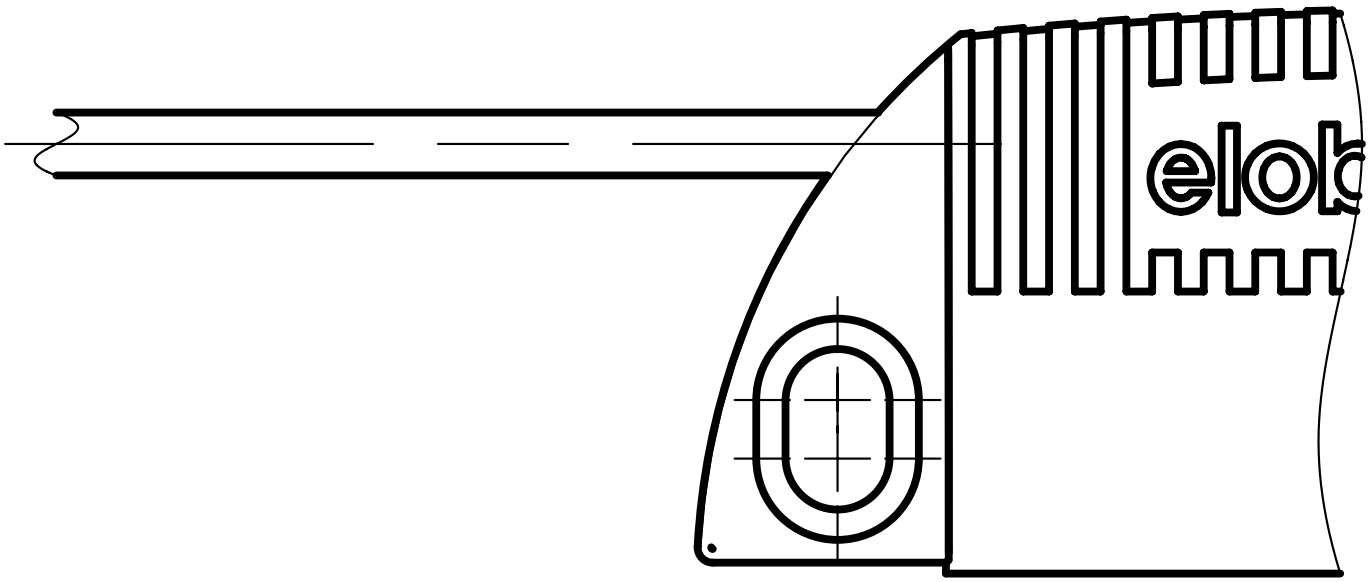


IMAGE 3/3

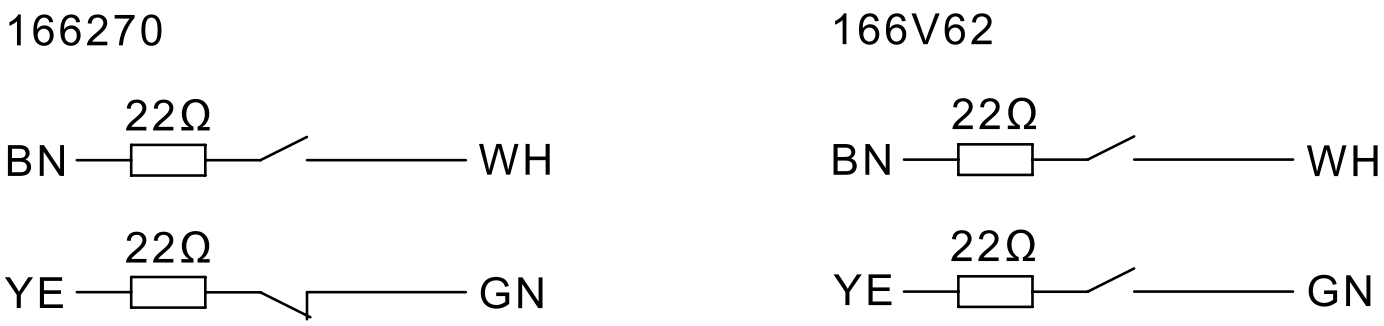


elobau GmbH & Co. KG
Zeppelinstr. 44
88299 Leutkirch, Germany

Tel.: +49 (0) 7561 970-0
Fax: +49 (0) 7561 970-100

Product options

IMAGE 1/3

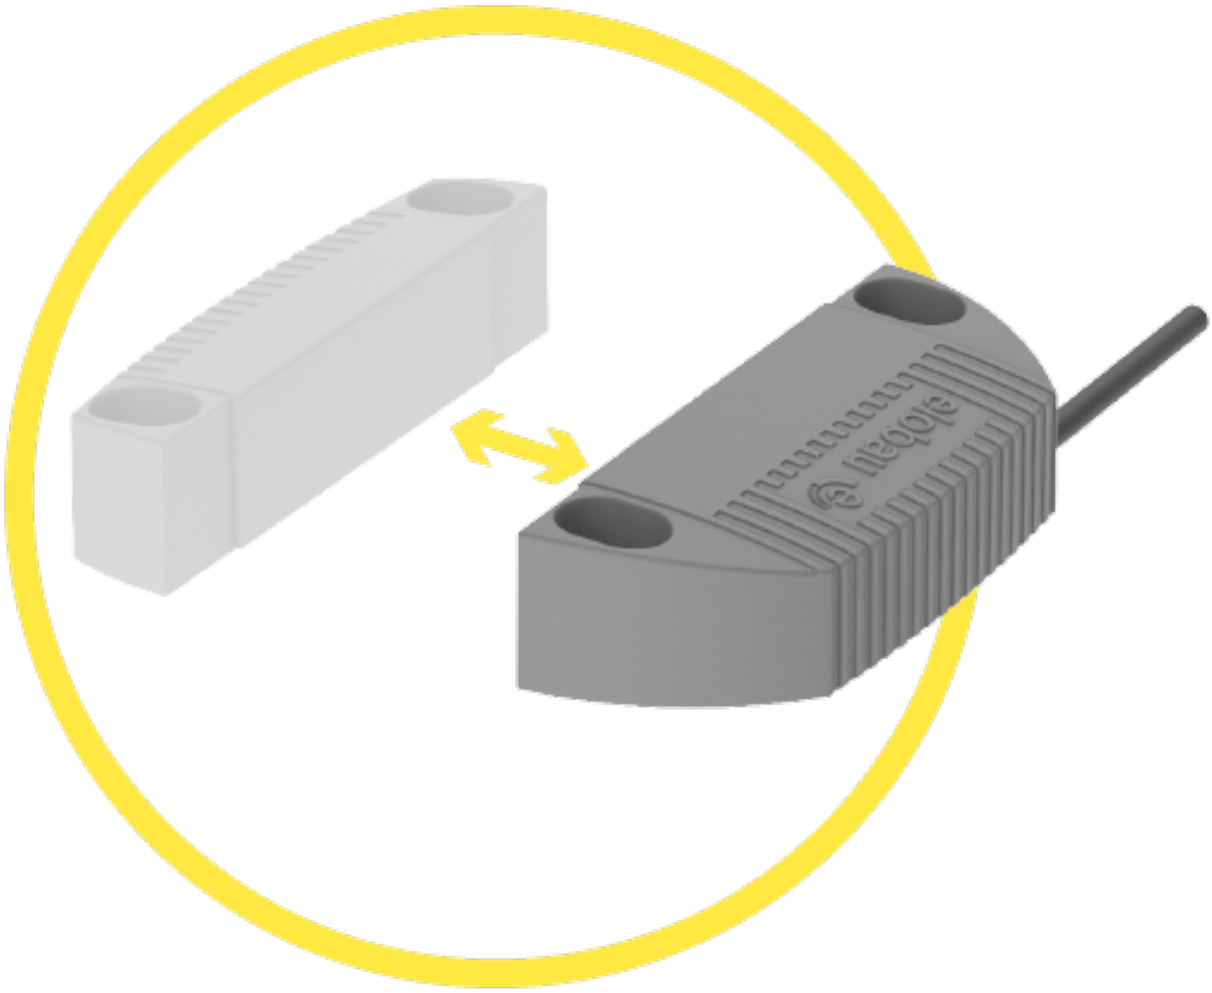

Suitable for front actuation. Operating distance (Sao)
8 mm. Assured switch-off distance (Sar) 14 mm.

elobau GmbH & Co. KG
Zeppelinstr. 44
88299 Leutkirch, Germany

Tel.: +49 (0) 7561 970-0
Fax: +49 (0) 7561 970-100

IMAGE 2/3

ORDERING KEY

	166V62	166270
Cubic plastic housing	x	x
Connection cable 1m 1	x	x
N.O./N.O. contacts	x	-
N.O./N.C. contacts	-	x
Coded	x	x
Uncoded	-	-

IMAGE 3/3

MATCHING ACTUATORS

Actuators	Actuation direction	166V62			166270			
	Front	SO_{min}	S_{ao}	S_{ar}	SO_{min}	S_{ao}	S_{ar}	
304 266 13		0.5	8	14	0.5	8	16	
304 266 13	Front 90°	0.5	8	14	0.5	8	16	

SO_{min} = minimum switching distance (mm), S_{ao} = operating distance (mm), S_{ar} = assured switch-off distance (mm)