



## Deutsch Stecker DT 06-8S 4-polig/8-polig

### Produktmerkmale

- Passend für Neigungssensoren N3/N4/N5

### Technische Zeichnung

BILD 1/3

L1HC00.B..






BILD 2/3


**L1HC00.B**

female AMP  
Micro Quadlock

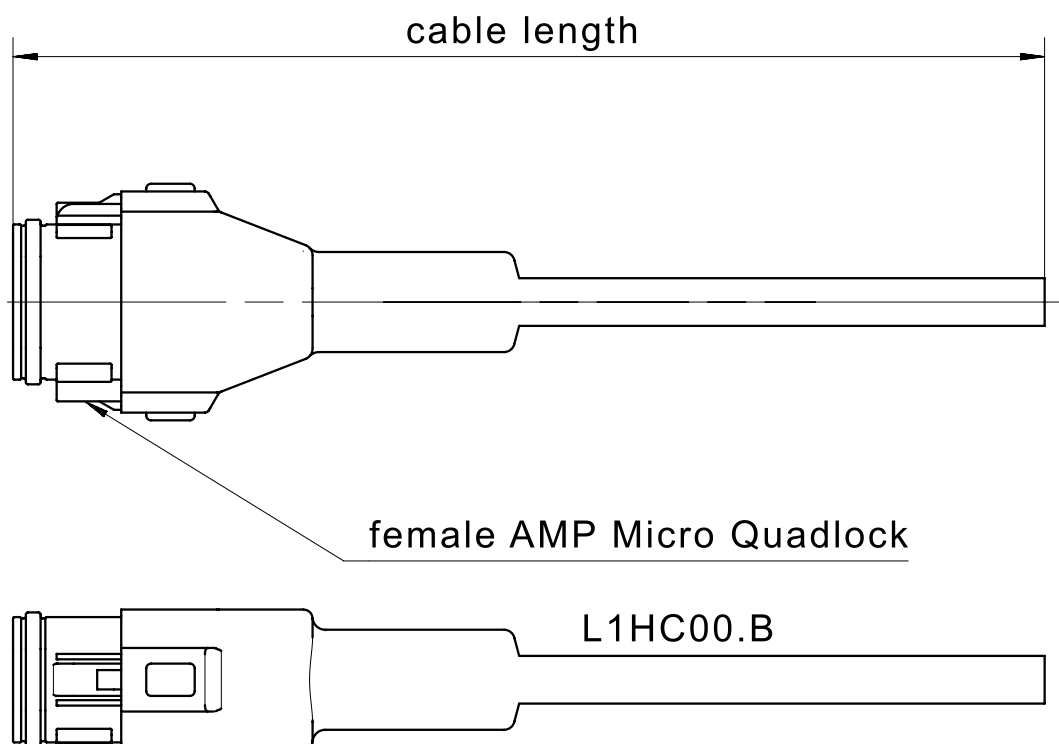

**L1HC00.B4**

female AMP  
Micro Quadlock



**L1HC00.B4A**

female AMP  
Micro Quadlock




BILD 3/3

**L1HC00.B**

1 )	RD
2 )	BN
3 )	BU
4 )	PK
5 )	GN
6 )	YE
7 )	WH
8 )	GY

**L1HC00.B4**

1 )	BN
2 )	BU
3 )	BK
4 )	GY
5 )	nc
6 )	nc
7 )	nc
8 )	nc

**L1HC00.B4A**

1 )	BN
2 )	BU
3 )	nc
4 )	nc
5 )	BK
6 )	GY
7 )	nc
8 )	nc

## Produktoptionen

BILD 1/1

### ORDERING KEY

L1HC00		Deutsch connector DT 06-8S
	1	Cable length 1m $\pm$ 30mm
	3	Cable length 3m $\pm$ 40mm
	5	Cable length 5m $\pm$ 60mm
	0	Cable length 10m $\pm$ 80mm
	B	8-pin
	B4	4-pin
	B4A	4-pin
		Other cable materials and cable lengths on request

## Artikel-Merkmale

Attribute	L1HC...B	L1HC...B4	L1HC...B4A
Kabelmaterial	PVC		
Betriebstemperatur min.	-40 °C		
Betriebstemperatur max.	80 °C		
Lagertemperatur min.	-40 °C		
Lagertemperatur max.	80 °C		
Steckertyp	Deutsch connector DT 06-8S socket		
Kabellänge	10 m		
Kabeldurchmesser	7,5 +/-0,2 mm	5,5 +/-0,3 mm	
Polanzahl	8		
Litzenanzahl	8	4	
Litzenquerschnitt	0,5 mm²		