
elobau GmbH & Co. KG
Zeppelinstr. 44
88299 Leutkirch, Germany

Tel.: +49 (0) 7561 970-0
Fax: +49 (0) 7561 970-100

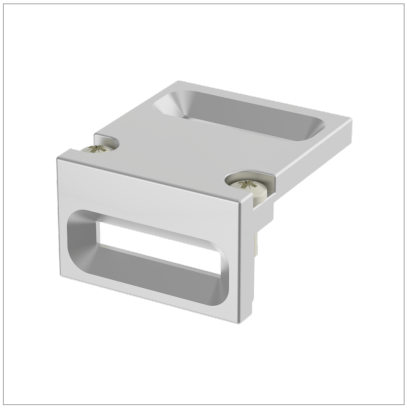

Insertion funnel

The large opening of the insertion funnel ensures actuators are reliably guided into the actuator head, which ensures the safety switch is protected from mechanical influences.

The insertion funnel is for use with the corresponding actuator.

Technical specification

- Material: stainless steel 1.4301


Note: minimal door radius with guide funnel r > 300 mm

elobau GmbH & Co. KG
Zeppelinstr. 44
88299 Leutkirch, Germany

Tel.: +49 (0) 7561 970-0
Fax: +49 (0) 7561 970-100

Technical drawing

IMAGE 1/1

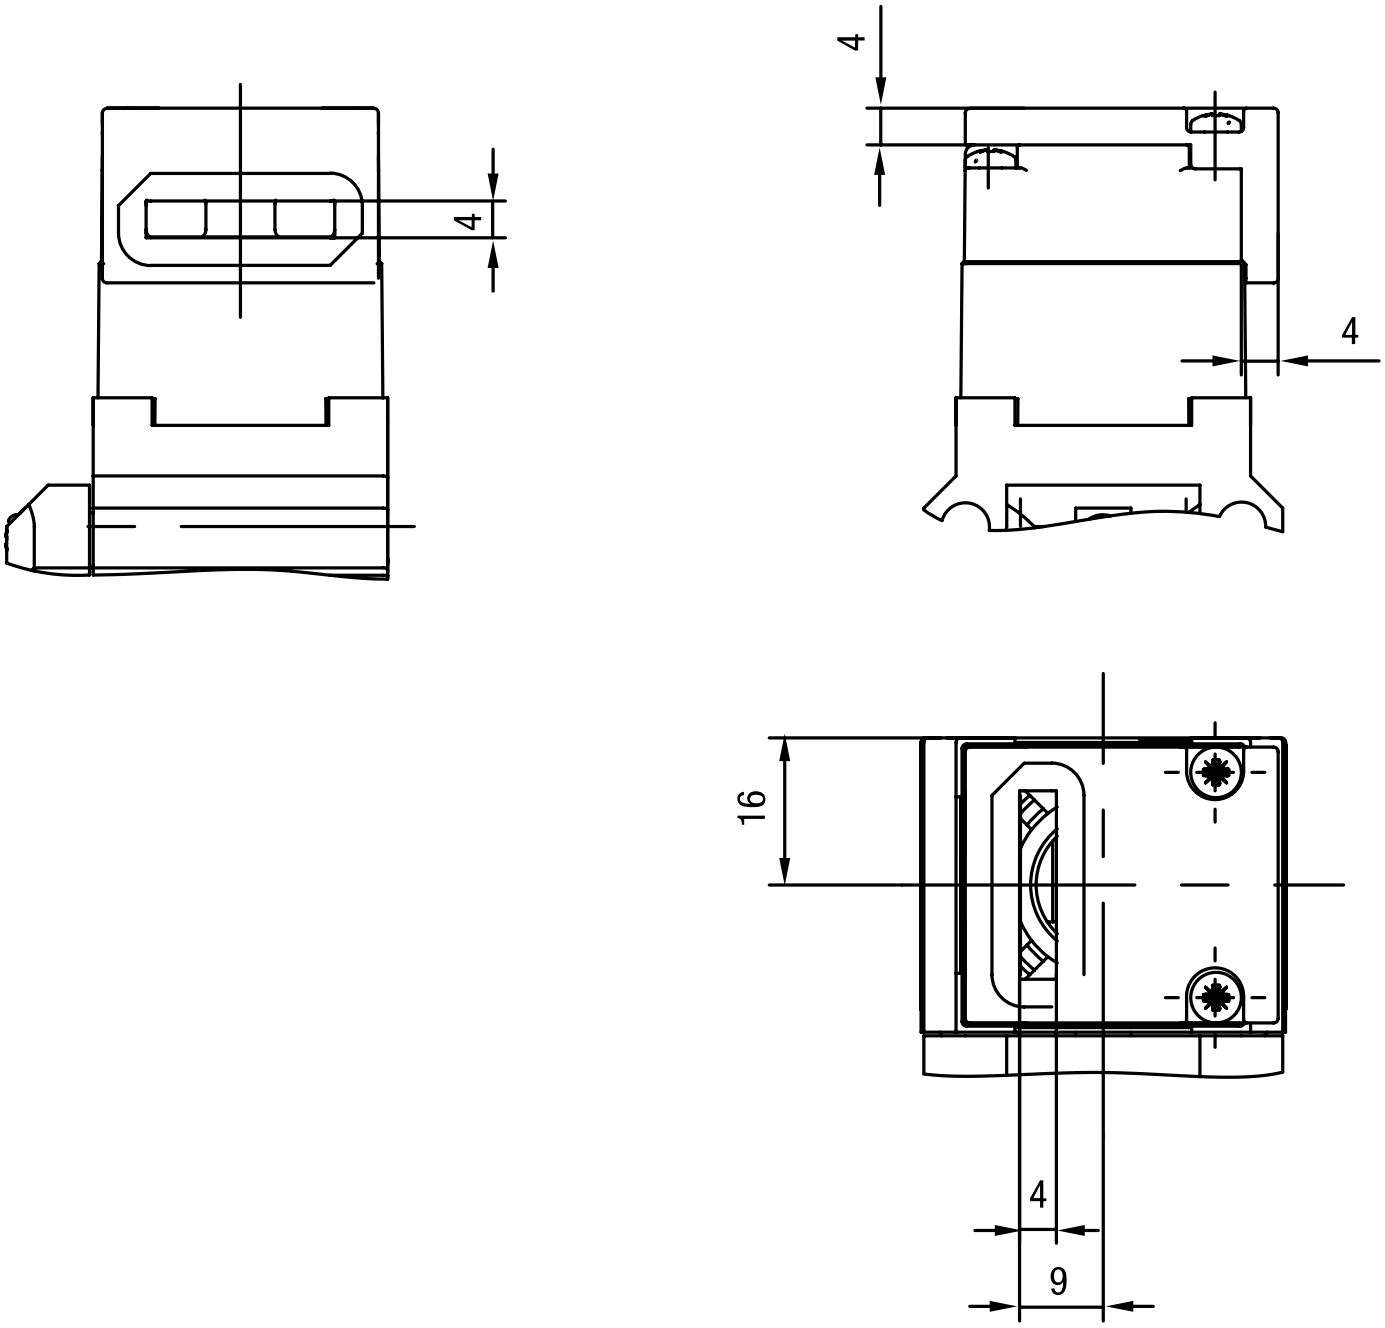

elobau GmbH & Co. KG
Zeppelinstr. 44
88299 Leutkirch, Germany

Tel.: +49 (0) 7561 970-0
Fax: +49 (0) 7561 970-100

Article characteristics

Attribute	ZA0S
Dimensions	30 x 38 x 19 mm (H/B/T)
Door radius min.	300 mm
Housing material	Edelstahl 1.4308
Mounting type	screwed