elobau GmbH & Co. KG
Zeppelinstr. 44
88299 Leutkirch, Germany

Tel.: +49 (0) 7561 970-0
Fax: +49 (0) 7561 970-100



Compact Joystick J2 with 321G Handle

A proven combination: The compact joystick with the 321G handle. The product features up to 6 nano push button switches, which can be defined via the configurator.

The 321G handle enables a wide range of options for machine operators. Up to 6 push button switches or 4 push button switches and a thumbwheel switch can be defined in the configurator. The joystick grip conforms to EU 167/2013 (Mother Regulation) and corresponds to protection class IP5K4.

Ideal for controlling front loader functions on tractors.


- High reliability and long service life thanks to contactless Hall-effect and reed technology
- Different output signals are possible: analogue, redundant, CAN bus connection (CANopen / SAE J1939) or with switching output
- Deflection ±20°
- Available with various actuation types such as no detent / detent
- Back-printed and abrasion-resistant push button switches can be defined via the configurator. Backlight and function light possible on request.
- Conforms to EU 167/2013 (Mother Regulation) and corresponds to protection class IP5K4.

elobau GmbH & Co. KG
Zeppelinstr. 44
88299 Leutkirch, Germany

Tel.: +49 (0) 7561 970-0
Fax: +49 (0) 7561 970-100

Technical drawing

IMAGE 1/3

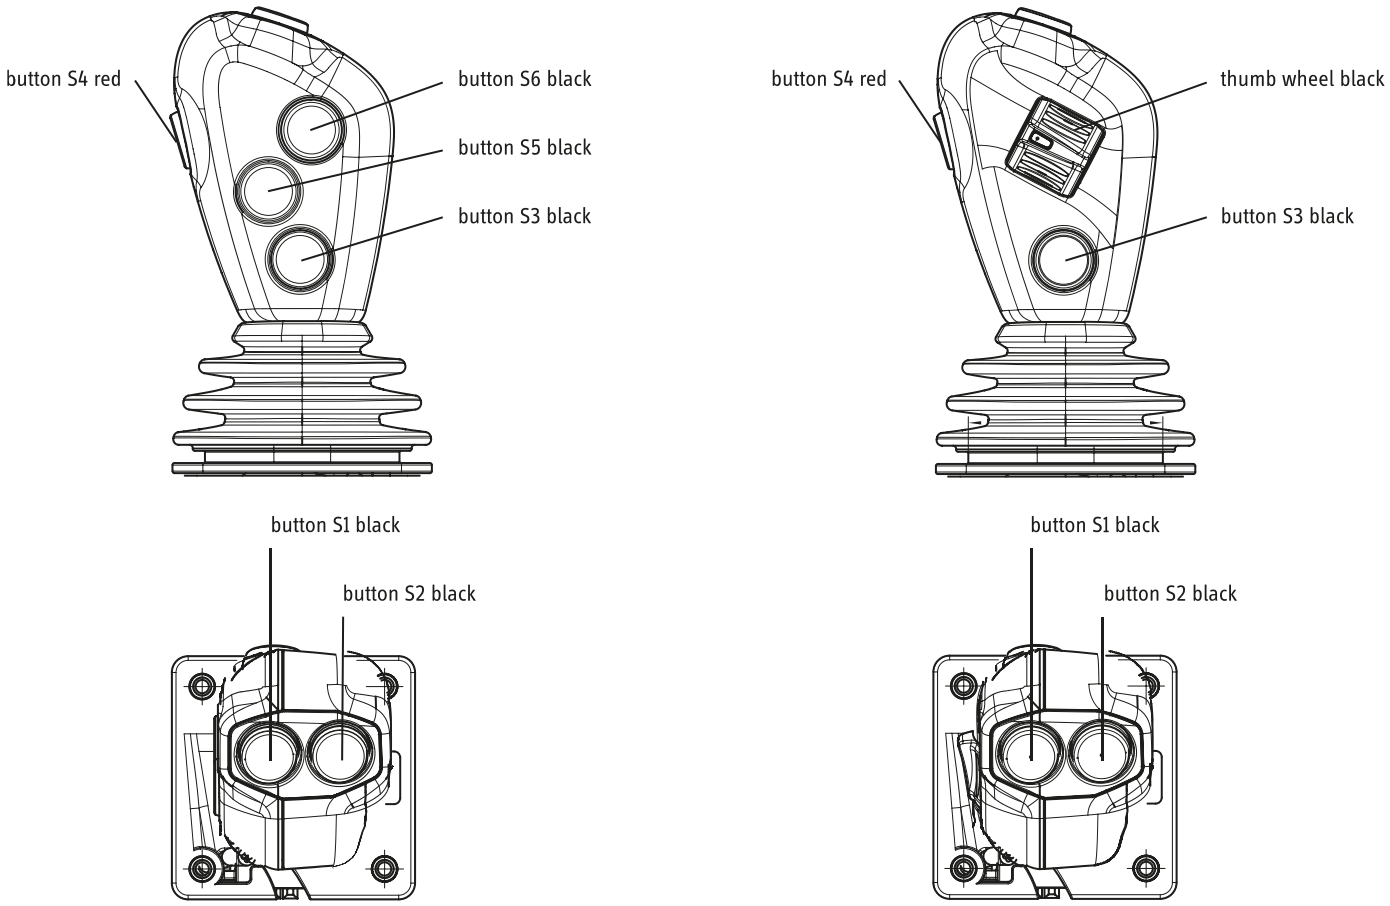


elobau GmbH & Co. KG
Zeppelinstr. 44
88299 Leutkirch, Germany

Tel.: +49 (0) 7561 970-0
Fax: +49 (0) 7561 970-100

IMAGE 2/3

Installation opening for 321G handle

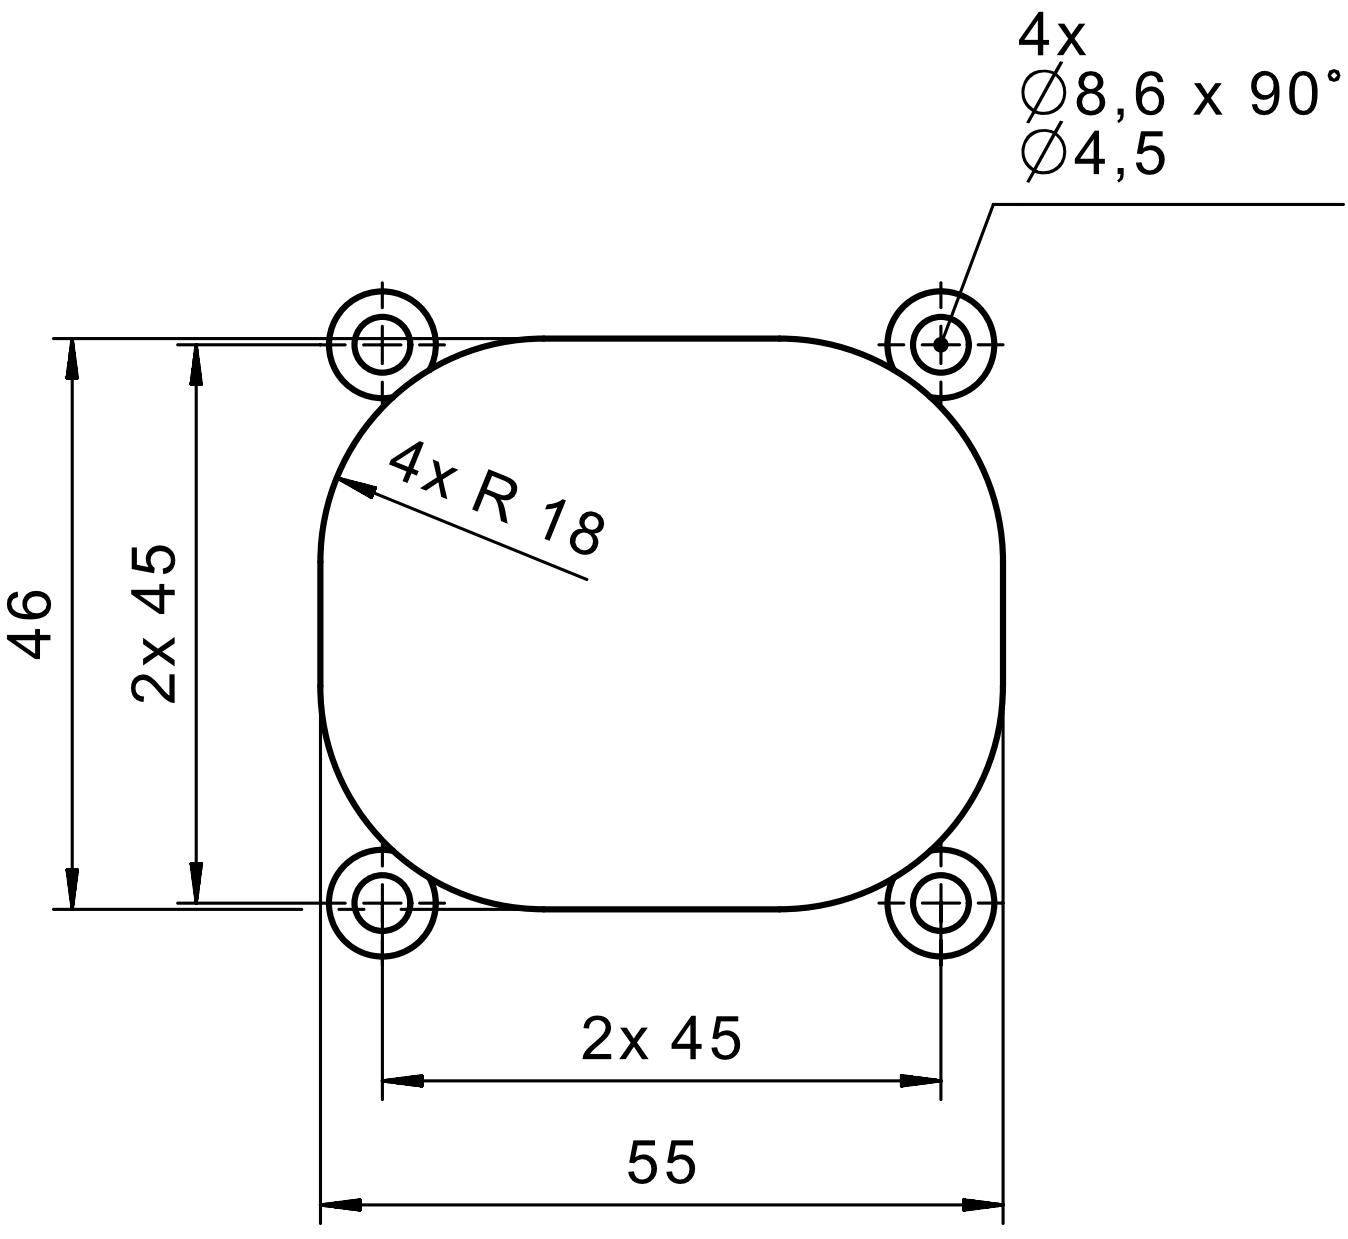


elobau GmbH & Co. KG
Zeppelinstr. 44
88299 Leutkirch, Germany

Tel.: +49 (0) 7561 970-0
Fax: +49 (0) 7561 970-100


IMAGE 3/3

Standard

Analogue each X- and Y-axis




CAN



Optional

Redundant each X- und Y-axis

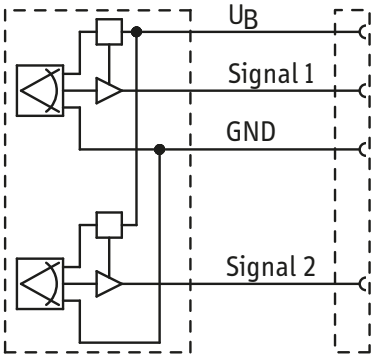

Semi-redundant each X- and Y-axis

