
elobau GmbH & Co. KG
Zeppelinstr. 44
88299 Leutkirch, Germany

Tel.: +49 (0) 7561 970-0
Fax: +49 (0) 7561 970-100

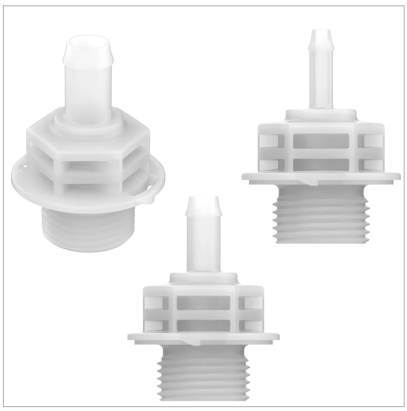

Hose fitting

The modular hose connection concept allows for easy hose replacement thanks to self-sealing, easily replaceable hose connectors (ID 4 – 352SL2201, ID 6 – 352SL2202 or ID 8 – 352SL2203). The tightening torque of 2.3 Nm -0.2 Nm/+0.7 Nm must be observed during installation.

The scope of delivery always includes 5 hose connectors.

- Suitable for eloLance SL2D and eloLance SL2R
- Self-sealing
- Material: PE
- Suitable for tubing with an inner diameter of 4 mm, 6 mm or 8 mm

elobau GmbH & Co. KG
Zeppelinstr. 44
88299 Leutkirch, Germany

Tel.: +49 (0) 7561 970-0
Fax: +49 (0) 7561 970-100

Article characteristics

Attribute	352SL2201	352SL2202	352SL2203
Suitable for	SL2		
Included with delivery	5 Stk.		
Hose fitting material	PE		
Connection/outlets	Hose fitting for hose with inner diameter 4 mm	Hose fitting for hose with inner diameter 6 mm	Hose fitting for hose with inner diameter 8 mm
Thread	G 3/8		
Torque	2.3 N m		