



Actuator 153MBK


When used with the corresponding safety sensor, the magnetic actuator of the new eloProtect M range enables optimised operating distances and offset values as well as increased tampering protection.

Technical specifications

- Flexibility in installation and use from variable actuation direction
- Space-saving and simple installation through small size
- Screw covers prevent easy removal and the accumulation of dirt
- Strong resistance against cleaning agents (ECOLAB) makes this suitable for use in the food and packaging industries.

Technical drawing

IMAGE 1/1

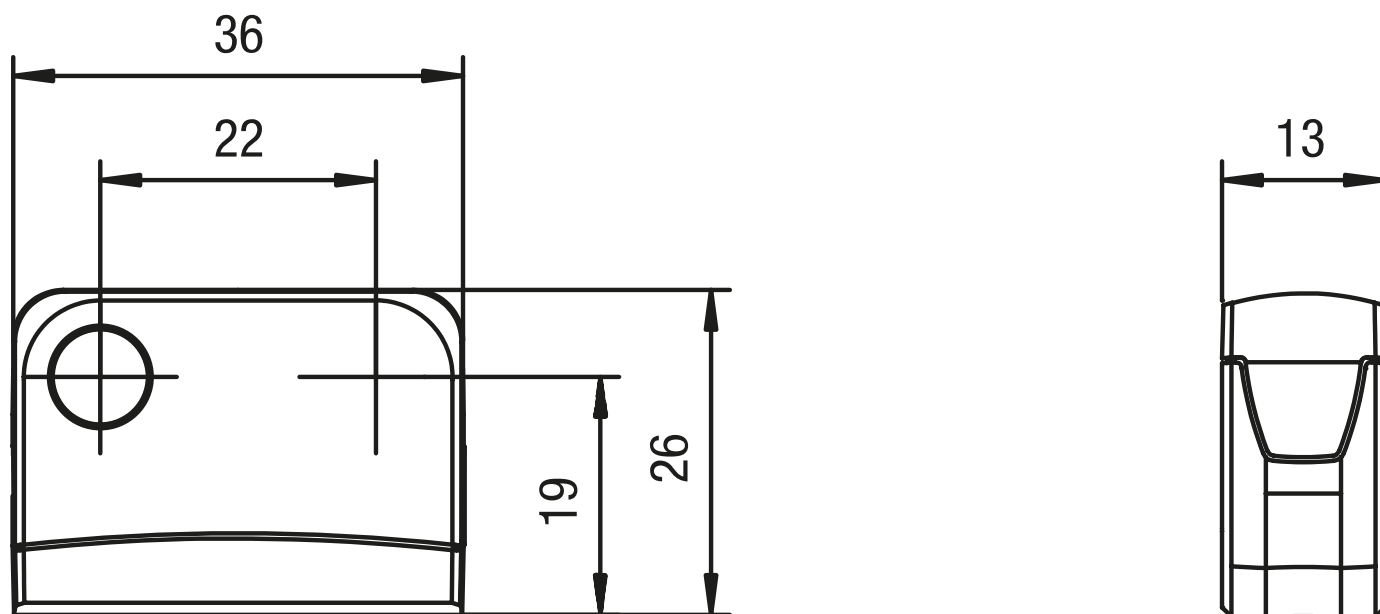

Product options

IMAGE 1/1

ORDERING KEY

| 153 | MBK | | Actuators for 153 MSK series |
|-----|-----|-----|--|
| | | 001 | Standard - front actuation |
| | | 101 | Increased switching distance - front actuation |
| | | 201 | Standard - 90° actuation |
| | | 301 | Increased switching distance - 90° actuation |

Article characteristics

| Attribute | 153MBK001 | 153MBK101 | 153MBK201 | 153MBK301 |
|-----------------------------|--------------|-----------|-----------|-----------|
| Coding acc. to EN ISO 14119 | Low | | | |
| Suitable for sensor type(s) | 153MSK | | | |
| Dimensions | 36x26x13 | | | |
| Housing material | PBT | PBT/PC | | |
| Housing colour | grau/schwarz | | | |
| Mounting type | screwed | | | |
| Torque for fastening screws | 0.7 N m | | | |