
**elobau GmbH & Co. KG**
Zeppelinstr. 44
88299 Leutkirch, Germany

Tel.: +49 (0) 7561 970-0
Fax: +49 (0) 7561 970-100



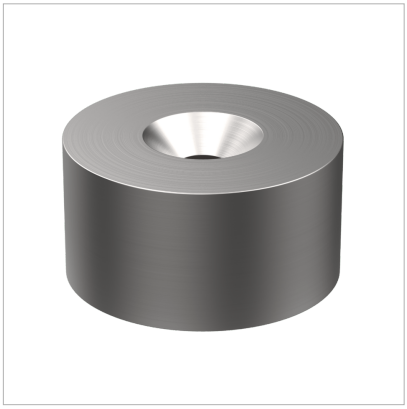

# Oxide magnet 30078 Ø26x11mm

## Product characteristics

- For use with magnetic sensors
- Simple installation with just one screw
- Large temperature range
- Hygienic design available
- Can be used in adverse environmental conditions thanks to the stainless steel housing


**elobau GmbH & Co. KG**
Zeppelinstr. 44
88299 Leutkirch, Germany

Tel.: +49 (0) 7561 970-0
Fax: +49 (0) 7561 970-100



## Technical drawing

IMAGE 1/1

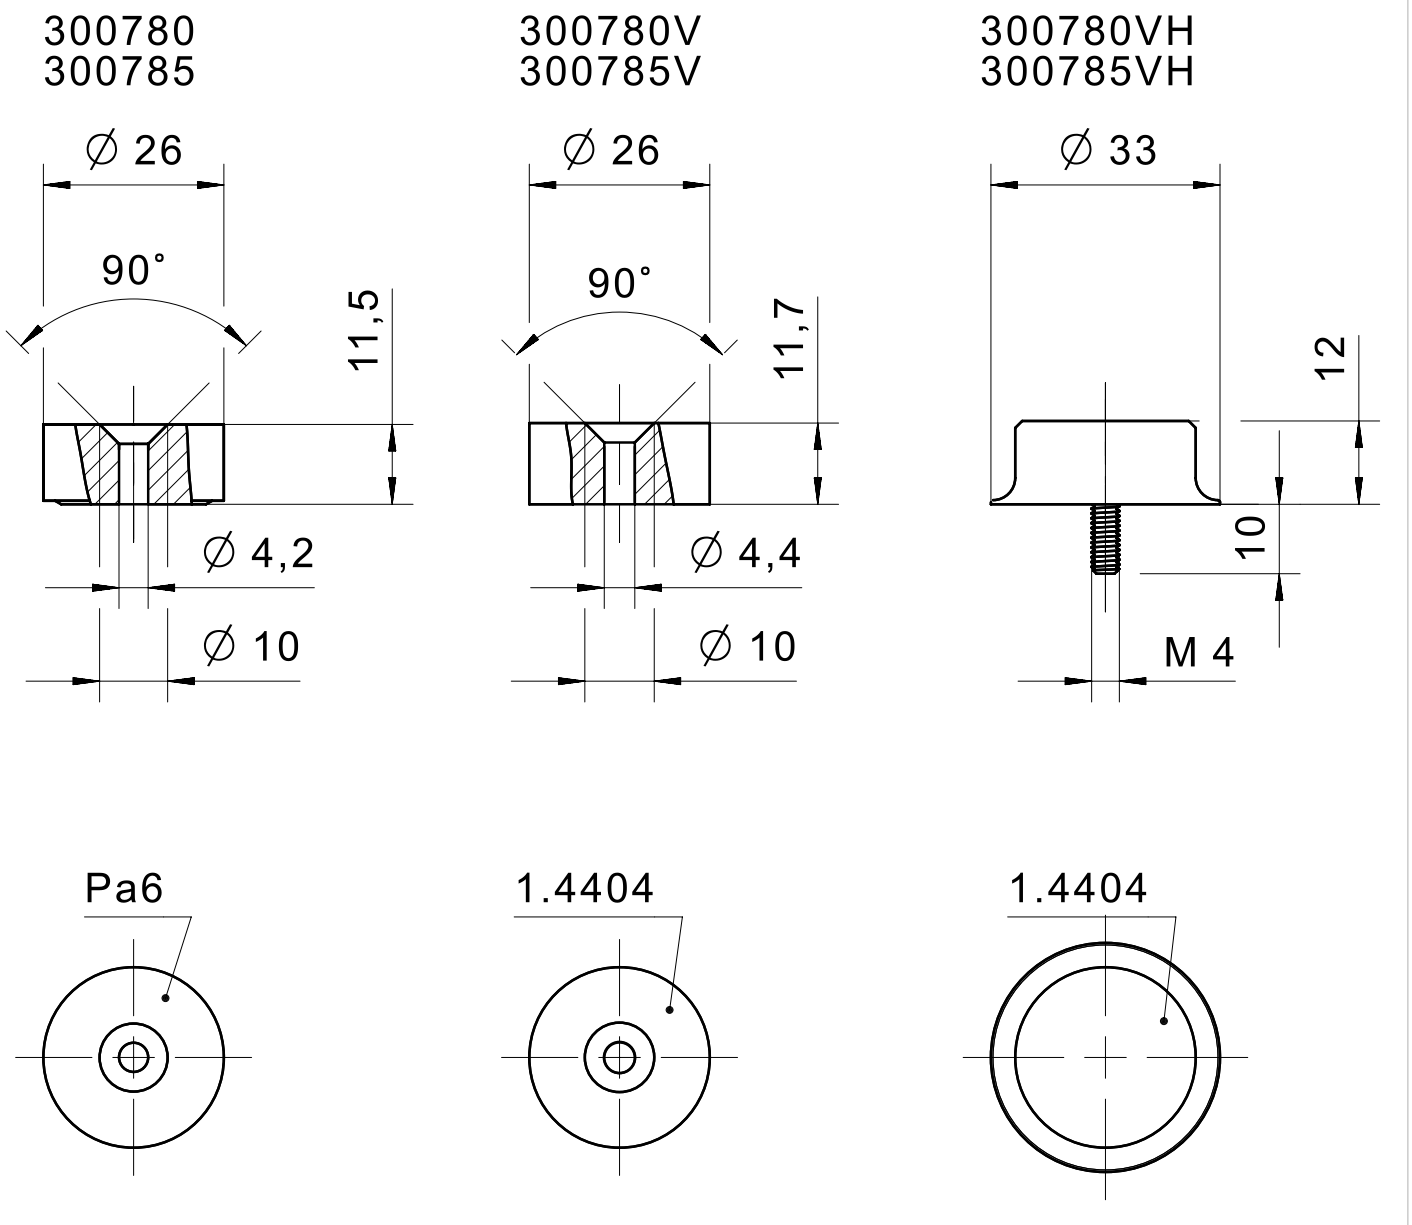

**elobau GmbH & Co. KG**
Zeppelinstr. 44
88299 Leutkirch, Germany

Tel.: +49 (0) 7561 970-0
Fax: +49 (0) 7561 970-100



## Product options

IMAGE 1/1

### ORDERING KEY

| 3007 | | | Oxide magnet with housing |
|---|---|---|---|
| | 80 | | Magnetic field north – plastic housing |
| | 80 | V | Magnetic field north – stainless steel housing |
| | 80 | VH | Magnetic field north – hygienic version |
| | 85 | | Magnetic field south – plastic housing |
| | 85 | V | Magnetic field south – stainless steel housing |
| | 85 | VH | Magnetic field north – hygienic version |

**elobau GmbH & Co. KG**
Zeppelinstr. 44
88299 Leutkirch, Germany

Tel.: +49 (0) 7561 970-0
Fax: +49 (0) 7561 970-100



## Article characteristics

| Attribute | 300780 | 300780V | 300780VH | 300785 | 300785V | 300785VH |
|---|---|---|---|---|---|---|
| **Dimensions** | Ø 26 / H=11,7 | | Ø 33 / H=12 | Ø 26 / H=11,7 | | Ø 33 / H=12 |
| **Material** | PA, hard ferrite | Stainless steel (1.4404), hard ferrite | | PA, hard ferrite | Stainless steel (1.4404), hard ferrite | |
| **Operating temperature min.** | -20 °C | | | | | |
| **Max. operating temperature** | 100 °C | 80 °C | | 100 °C | 80 °C | |
| **Mounting type** | Screw | | Thread | Screw | | Thread |
| **Thread** | – | | M4x10 | – | | M4x10 |