



Oxide magnet 30079 Ø23x8mm


Product characteristics

- For use with magnetic sensors
- Simple installation with just one screw
- Large temperature range
- Can be used in adverse environmental conditions thanks to the stainless steel housing


Technical drawing

IMAGE 1/1


300790
300795

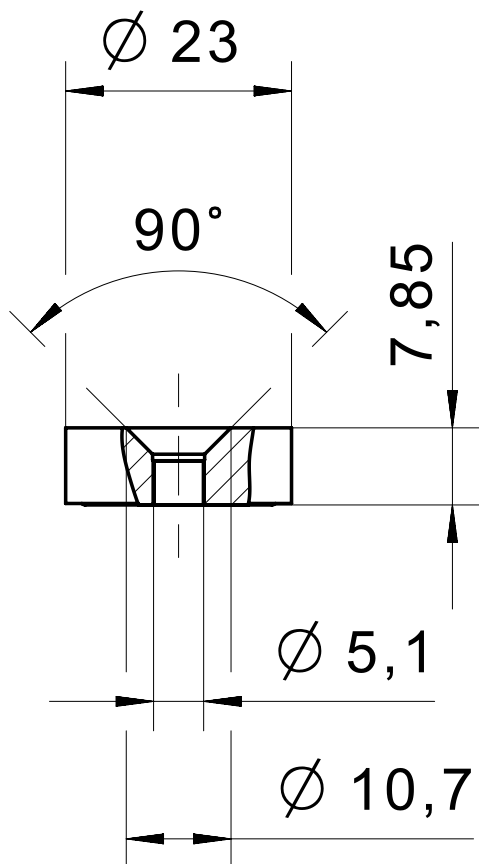


Pa6

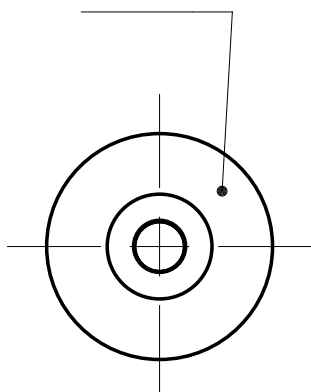

300790V
300795V

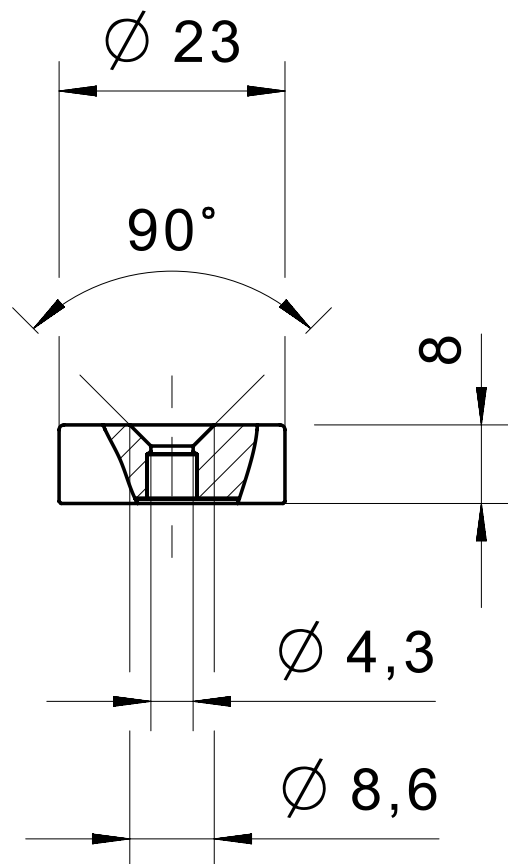

1.4404

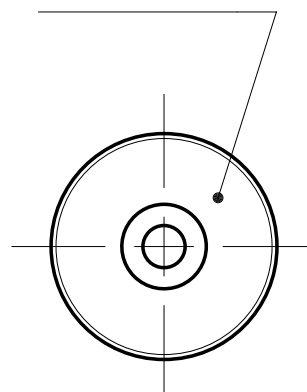

Product options

IMAGE 1/1

ORDERING KEY

3007			Oxide magnet with housing
	90		Magnetic field north – plastic housing
	90	V	Magnetic field north – stainless steel housing
	95		Magnetic field south – plastic housing
	95	V	Magnetic field south – stainless steel housing

Article characteristics

Attribute	300790	300790V	300795	300795V	ED300790	ED300790V ▶
Dimensions	Ø 23 / H=8				-	
Material	PA, hard ferrite	Stainless steel (1.4404), hard ferrite	PA, hard ferrite	Stainless steel (1.4404), hard ferrite	-	
Operating temperature min.	-20 °C				-	
Max. operating temperature	100 °C	80 °C	100 °C	80 °C	-	
Mounting type	Screw				-	

Attribute	ED300795	ED300795V
Dimensions	-	
Material	-	
Operating temperature min.	-	
Max. operating temperature	-	
Mounting type	-	