



Float switch 205KS

The float switch side mount 205KS with Teflon hinge is ideal for use in media that has a tendency to clump or contains contaminants that need to be monitored. It is available with two different mounting options, so ideal for use in a range of applications and industries, eg the detection of fluid levels in water treatment containers, mechanical engineering and plant construction. The float switch also has a specially designed compression grommet which allows it to be installed from the outside. The switching function is reversible by simply rotating the float switch, making this a highly flexible and cost-effective solution.


Product characteristics

- Level detection on reed-contact basis
- Teflon hinge for use in high-viscosity or contaminated media
- Material: PP or PVDF
- Mounting options: G 1/2 thread or compression grommet
- Available connection types: cable outlet, M12 connector or pigtail
- Contact form: N.O., N.C. or changeover
- Temperature range from -25 °C to +105 °C
- Switching voltage up to max. 250V
- IP67 protection class

Technical drawing

IMAGE 1/9

205KS..2..

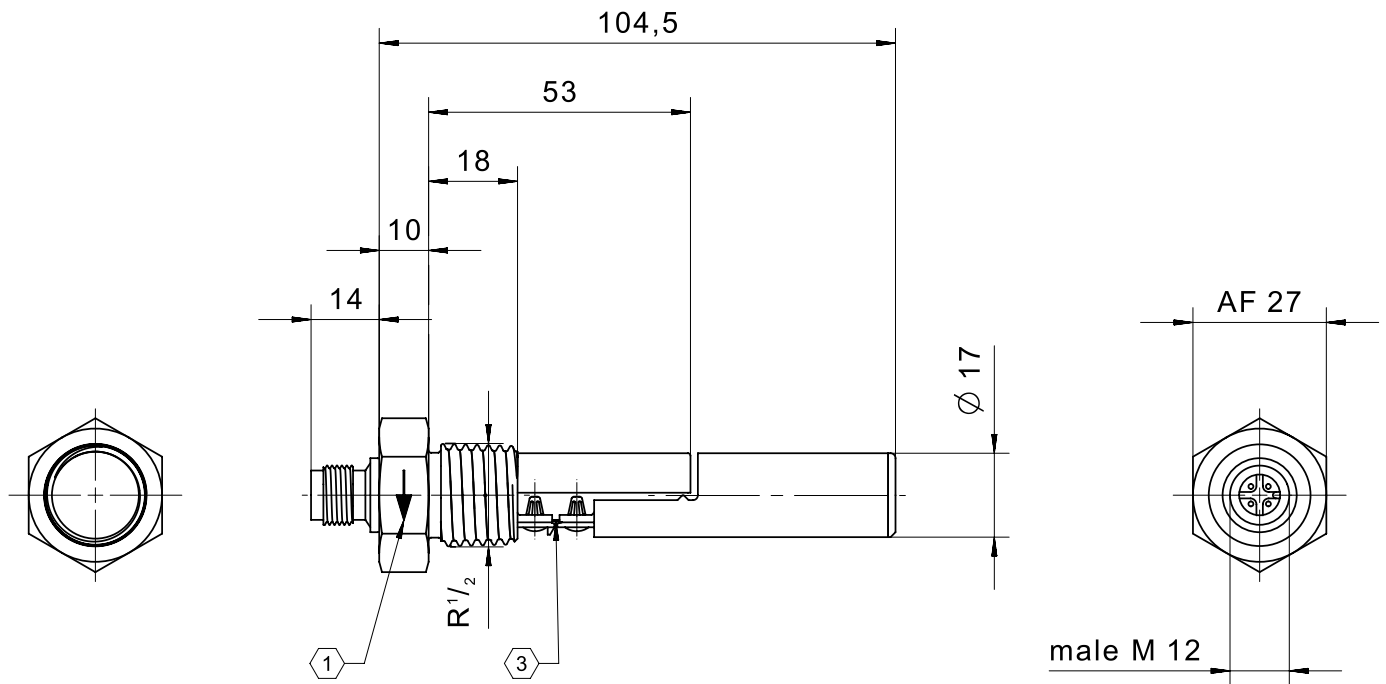


① marking for mounting position


③ hinge made from PTFE

IMAGE 2/9

male M12

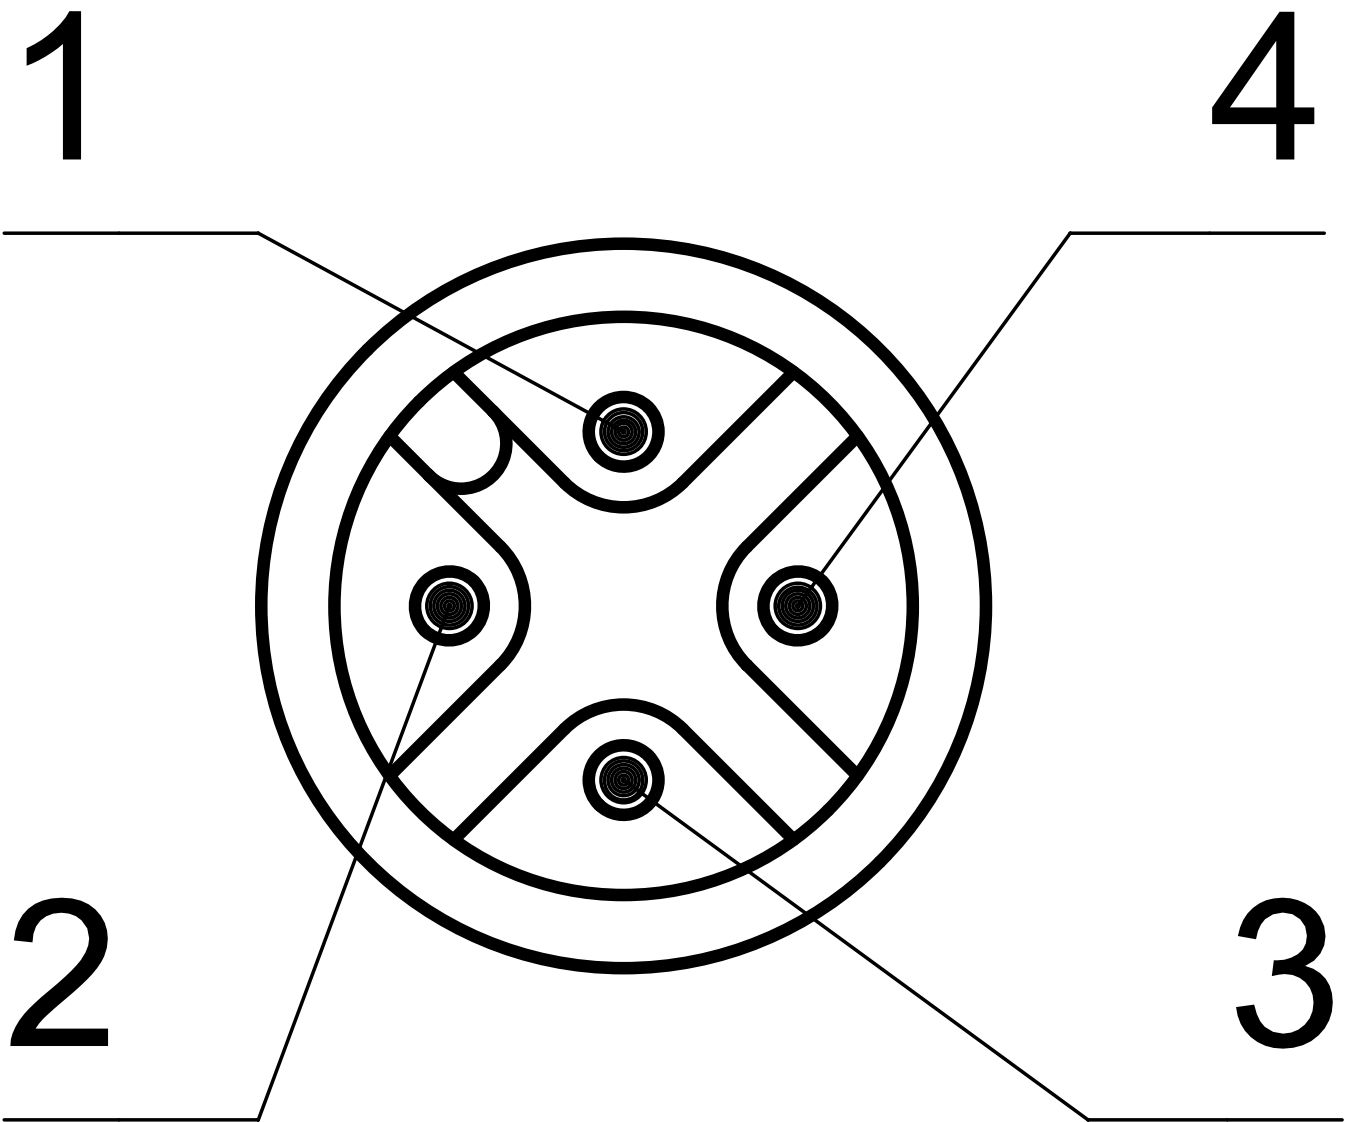

1  4

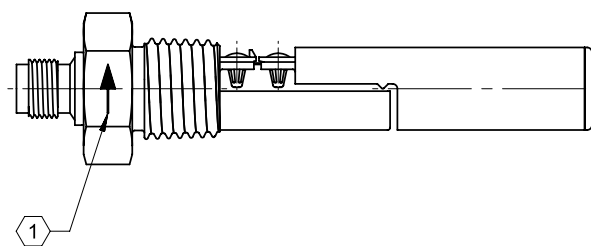

- Page 4/11

IMAGE 5/9



IMAGE 6/9




205KS0.D.....
205KS1.D.....

BN ———— WH

205KS2.D.....

BN ———— GN
 WH

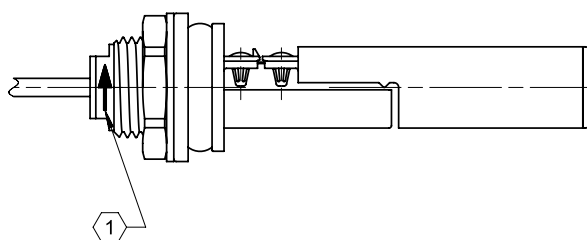

205KS0.D.....
205KS1.D.....

BN ———— WH

205KS2.D.....

BN ———— GN
 WH

205KS..G..





IMAGE 8/9



IMAGE 9/9

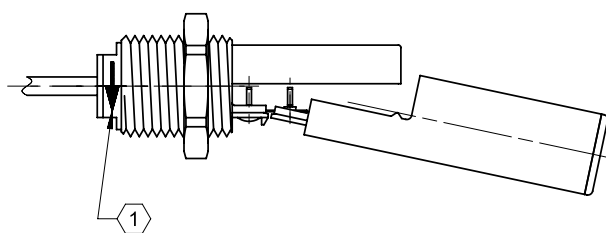


205KS0.G.....
205KS1.G.....

BN ———— WH

205KS2.G.....

BN ———— GN
 WH

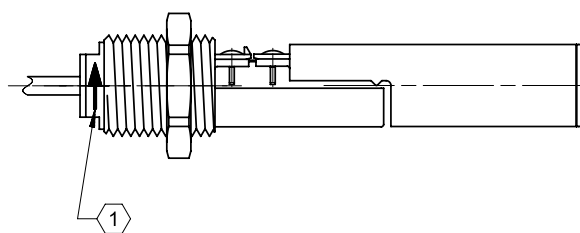

205KS0.G.....
205KS1.G.....

BN ———— WH

205KS2.G.....

BN ———— GN
 WH

Product options

IMAGE 1/1

ORDERING KEY

205KS					Float switch side mount, Teflon hinge	
					Contact form	
	1				N.O./N.C. max. 250V	
	2				C.O. max. 48V	
					Housing material	
		2			PP	
		3			PVDF*	* Only for connection 0
					Connections	
			0		Connection thread R1/2, PVC cable connection 1 m, limit stop	
			2		Connection thread R1/2, M12 connector*	* Only with material: PP
			D		Connection thread G1/2, PVC cable connection 1m, compression grommet	
			G		Connection thread G1/2, PVC cable connection 1 m	
					Other cable lengths*	* Only for connections 0, D and G
				-3	Cable length 3m	
				-5	Cable length 5m	
				-10	Cable length 10m	

Optional

More materials for housings, cable sheathing on request

Article characteristics

Attribute	205KS12D	205KS12G	205KS120	205KS122	205KS22D	205KS22G ▶
Max. switching voltage	250 V DC				48 V DC	
Max. switching voltage	250 V AC				48 V AC	
Max. switching current	1 A				0.25 A	
Max. switching power	50 W				3 W	
Contact form	1A or 1B				1C	
Output signal	digital					
Technology	Reed					
Float diameter	17 mm					
Version	Teflon hinge					
Housing material	PP					
Float material	PP					
Cable material	PVC			-	PVC	
Operating temperature min.	-25 °C					
Max. operating temperature	105 °C					
Pressure resistance	3 bar					
Protection class outside container	IP67 DIN EN 60529					
Protection class inside container	IP68 DIN EN 60529					
Mounting type	Thread					
Thread	G 1/2					
Installation opening	G1/2	G 1/2	G1/2	G 1/2	G1/2	
Connector type	-			M12	-	
Cable length	1 m			-	1 m	

Attribute	205KS220	ED205KS12D	ED205KS12G	ED205KS120	ED205KS122	ED205KS22D ▶
Max. switching voltage	48 V DC			-		
Max. switching voltage	48 V AC			-		
Max. switching current	0.25 A			-		
Max. switching power	3 W			-		
Contact form	1C			-		
Output signal	digital			-		
Technology	Reed			-		
Float diameter	17 mm			-		
Version	Teflon hinge			-		
Housing material	PP			-		
Float material	PP			-		
Cable material	PVC			-		
Operating temperature min.	-25 °C			-		
Max. operating temperature	105 °C			-		
Pressure resistance	3 bar			-		
Protection class outside container	IP67 DIN EN 60529			-		
Protection class inside container	IP68 DIN EN 60529			-		
Mounting type	Thread			-		
Thread	G 1/2			-		
Installation opening	G1/2			-		
Connector type	-			-		
Cable length	1 m			-		

Attribute	ED205KS22G	ED205KS220
Max. switching voltage	-	-
Max. switching voltage	-	-
Max. switching current	-	-
Max. switching power	-	-
Contact form	-	-
Output signal	-	-
Technology	-	-
Float diameter	-	-
Version	-	-
Housing material	-	-
Float material	-	-
Cable material	-	-
Operating temperature min.	-	-
Max. operating temperature	-	-
Pressure resistance	-	-
Protection class outside container	-	-
Protection class inside container	-	-
Mounting type	-	-
Thread	-	-
Installation opening	-	-
Connector type	-	-
Cable length	-	-