



## Float switch 207KS

The float switch side mount 207KS with robust mechanical hinge is ideal for use in applications that require reliable monitoring under powerful flows. It is available with two different mounting options, so ideal for use in a range of applications and industries, eg the detection of fluid levels in water treatment containers, mechanical engineering and plant construction. The float switch also has a specially designed compression grommet which allows it to be installed from the outside. The switching function is reversible by simply rotating the float switch, making this a highly flexible and cost-effective solution.

### Product characteristics

- Level measurement on reed-contact basis
- Mechanical hinge allows use in powerful flows
- Material: PP or PA12
- Mounting options: NPT thread or compression grommet
- Available connection types: cable outlet, M12 connector or pigtail
- Contact form: N.O., N.C. or changeover
- Temperature range from -25 °C to +105 °C
- Switching voltage up to max. 250V
- IP67 protection class

## Technical drawing

IMAGE 1/12

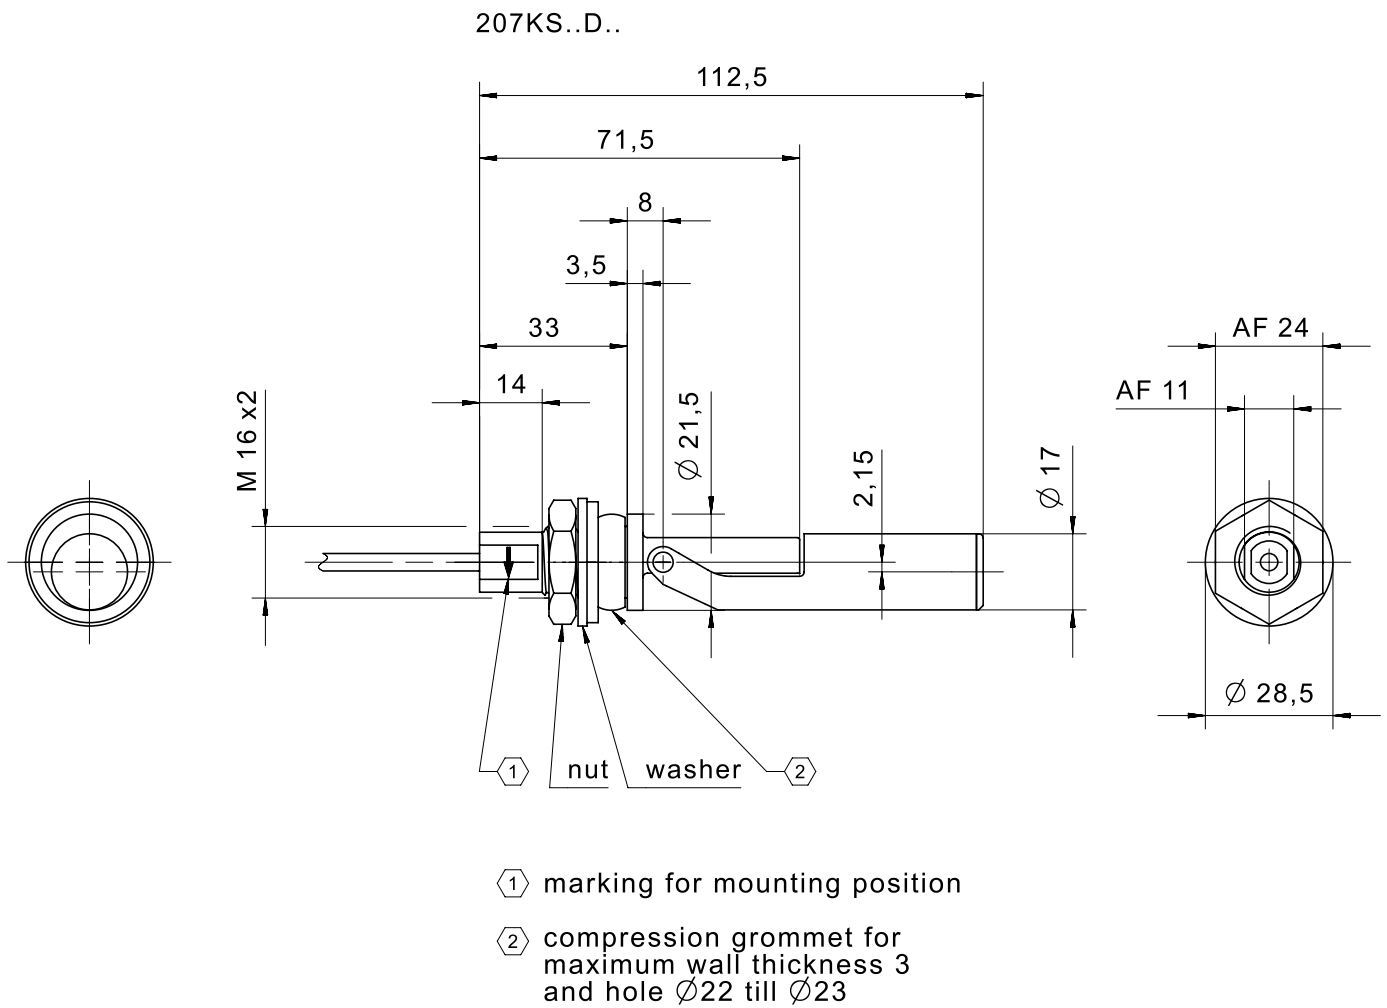


IMAGE 2/12


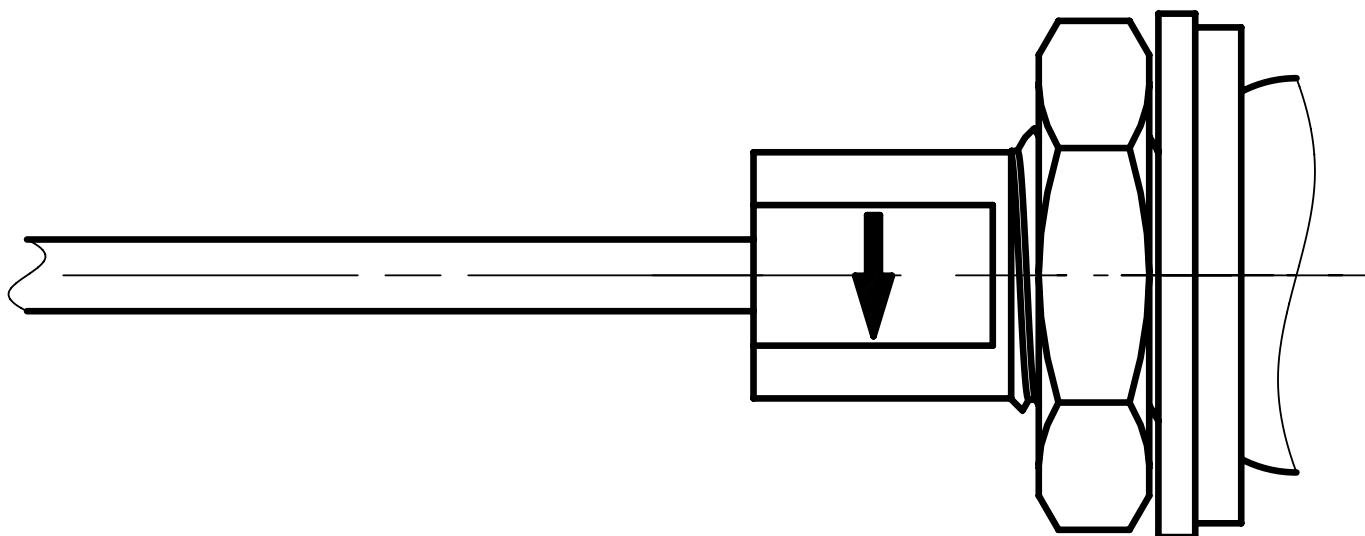


IMAGE 3/12

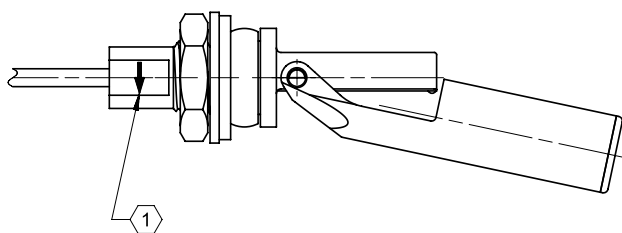


207KS0.D.....  
207KS1.D.....

BN ———— WH

207KS2.D.....

BN ———— GN  
                    WH

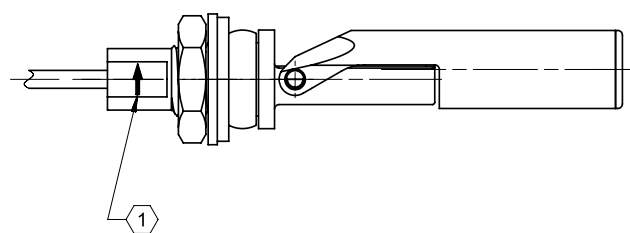

207KS0.D.....  
207KS1.D.....

BN ———— WH

207KS2.D.....

BN ———— GN  
                    WH

IMAGE 4/12

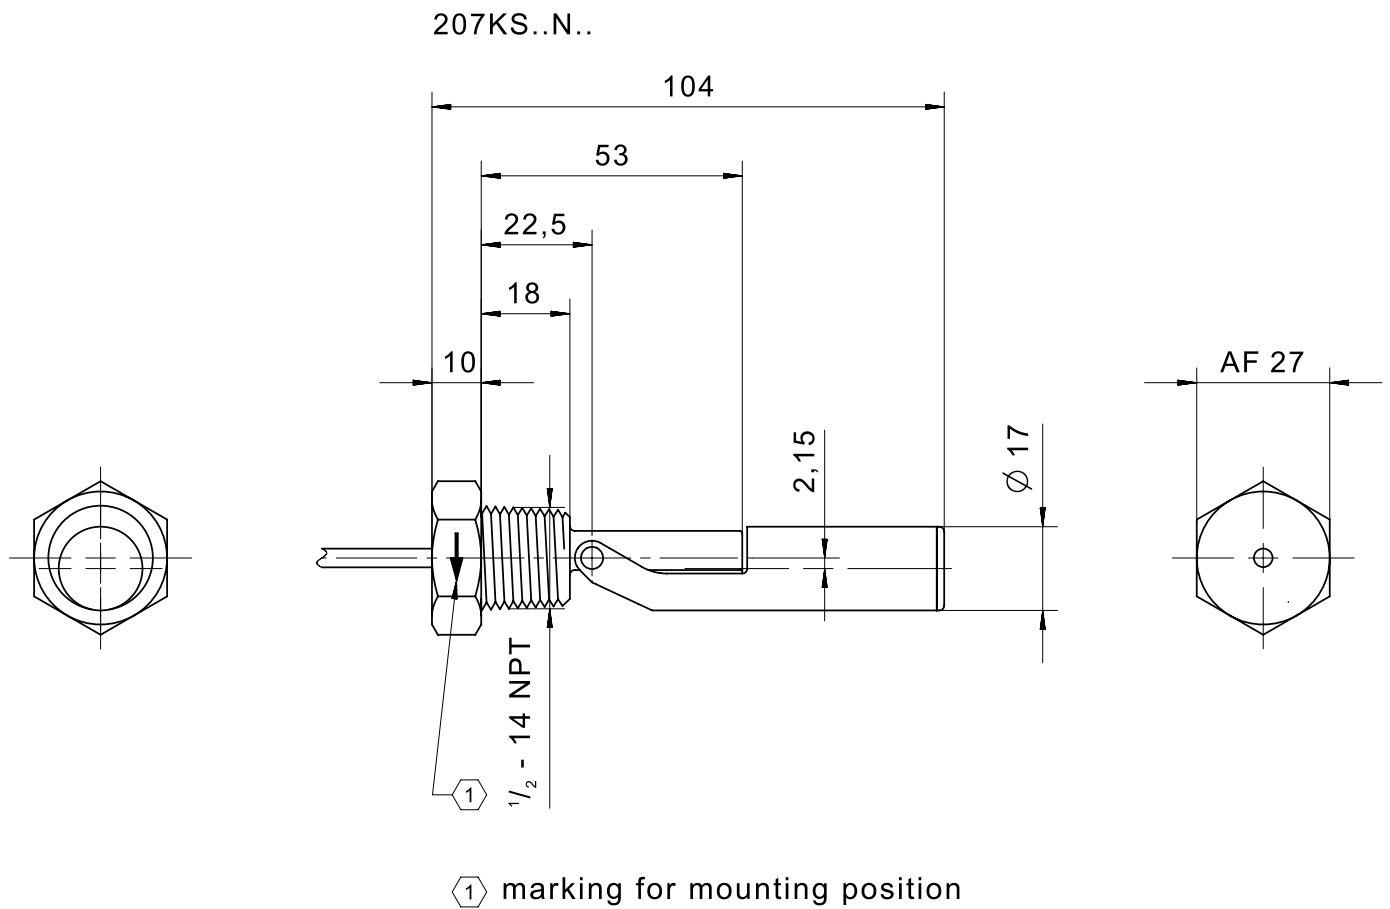


IMAGE 5/12


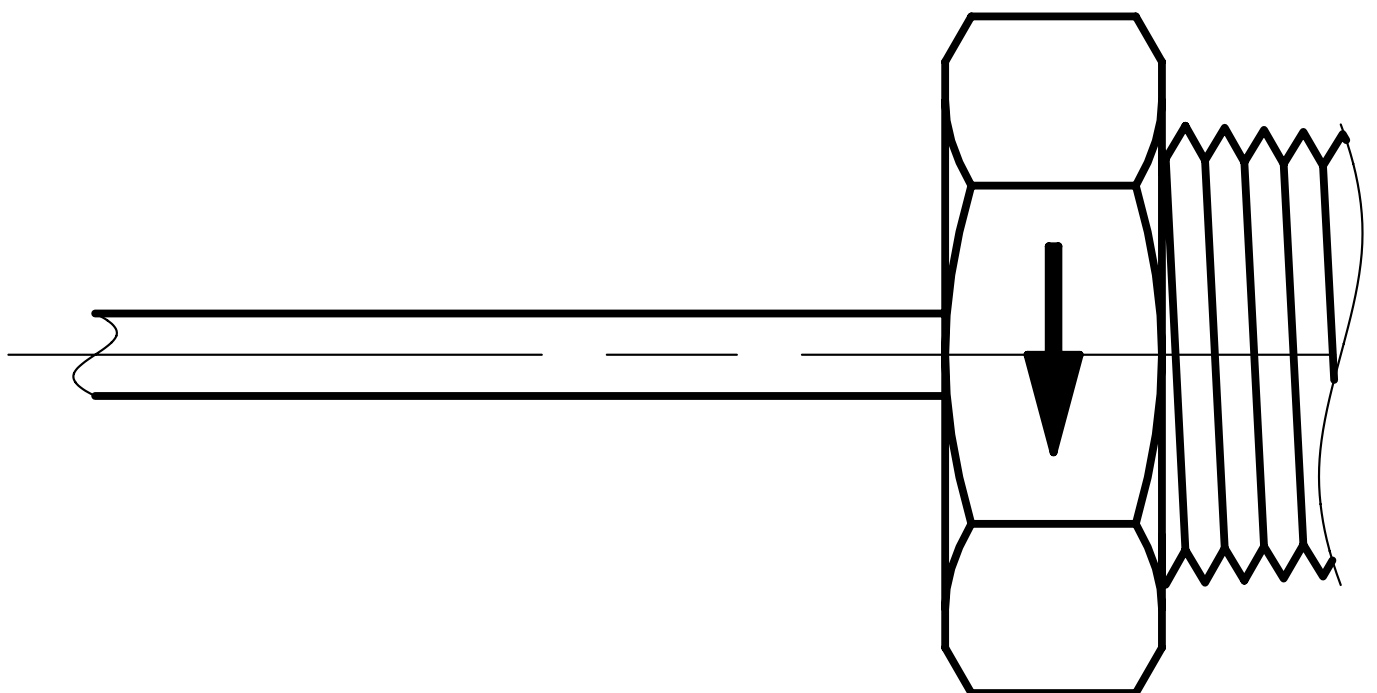


IMAGE 6/12

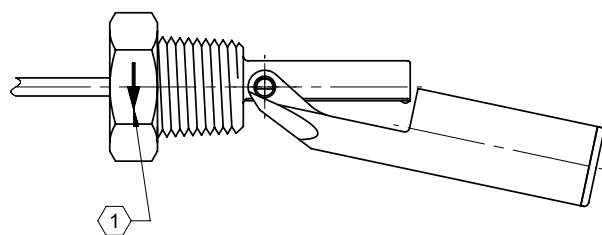


207KS0.N..  
207KS1.N..

BN ——— WH

207KS2.N..

BN ——— GN  
                    WH

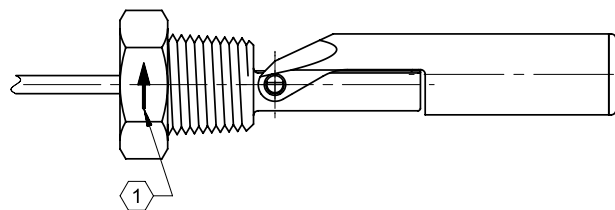

207KS0.N..  
207KS1.N..


BN ——— WH

207KS2.N..

BN ——— GN  
                    WH

IMAGE 7/12

207KS14N05

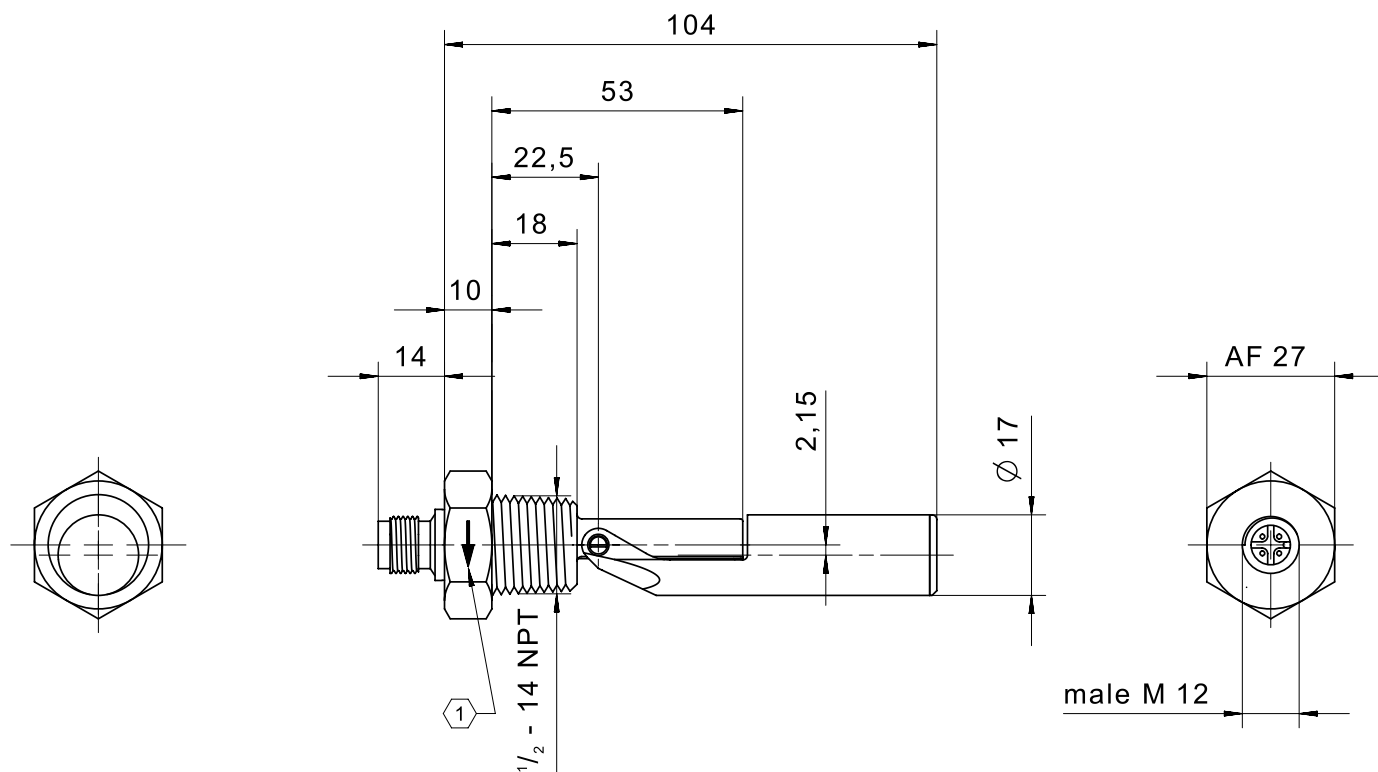

① marking for mounting position

IMAGE 8/12

# male M12




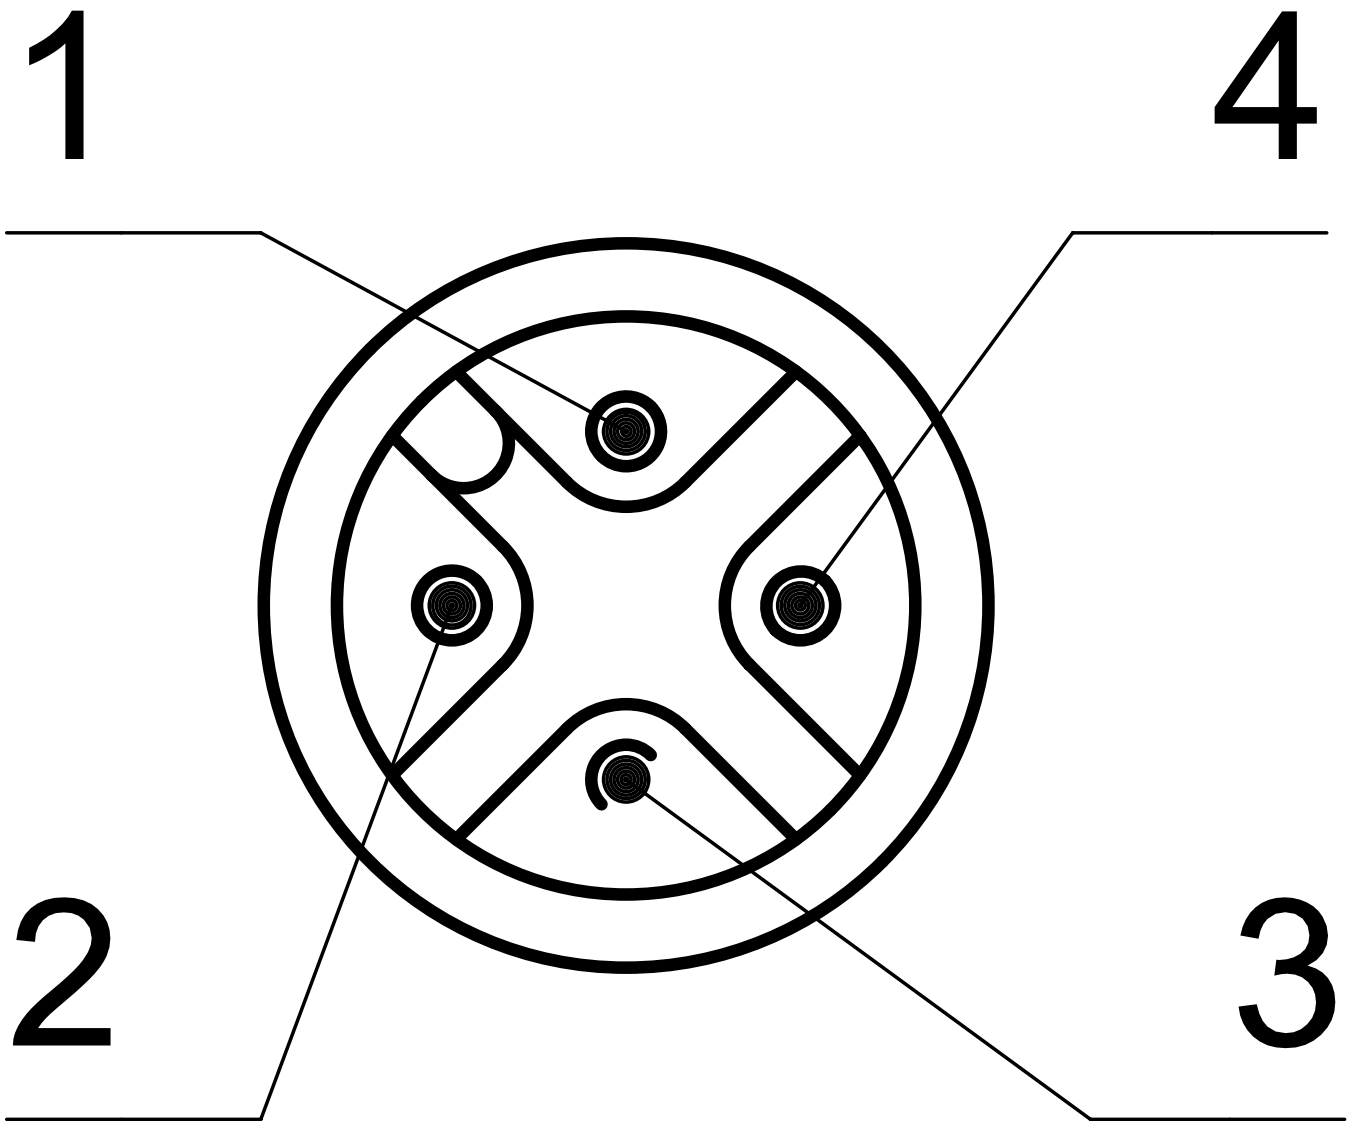


IMAGE 9/12

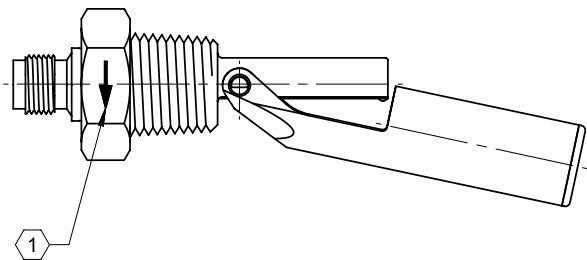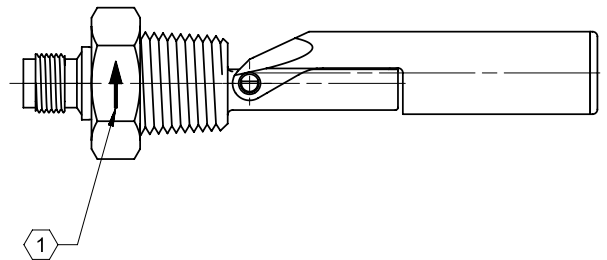

207KS14N05



207KS14N05





IMAGE 10/12

207KS..M..

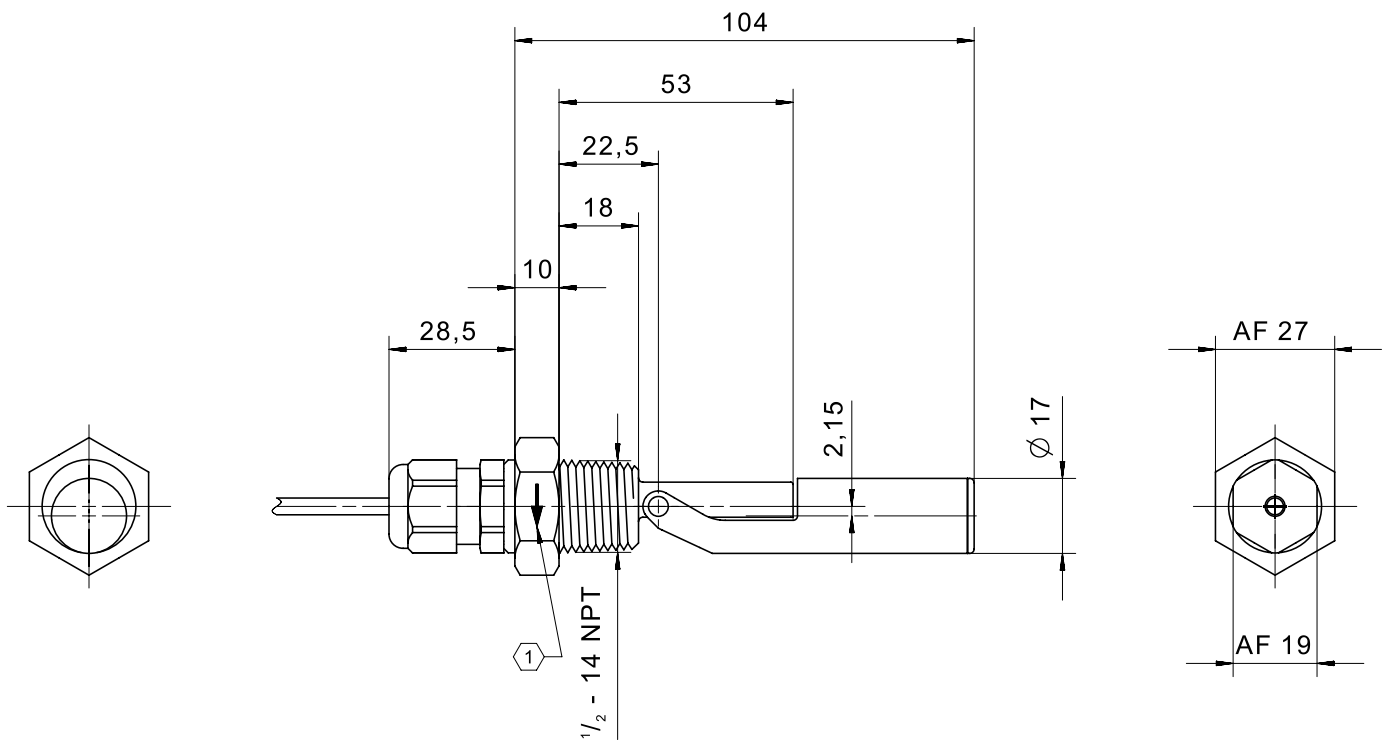


 marking for mounting position

IMAGE 11/12

# cable gland PA





IMAGE 12/12




207KS0.M..  
207KS1.M..

BN ——— WH

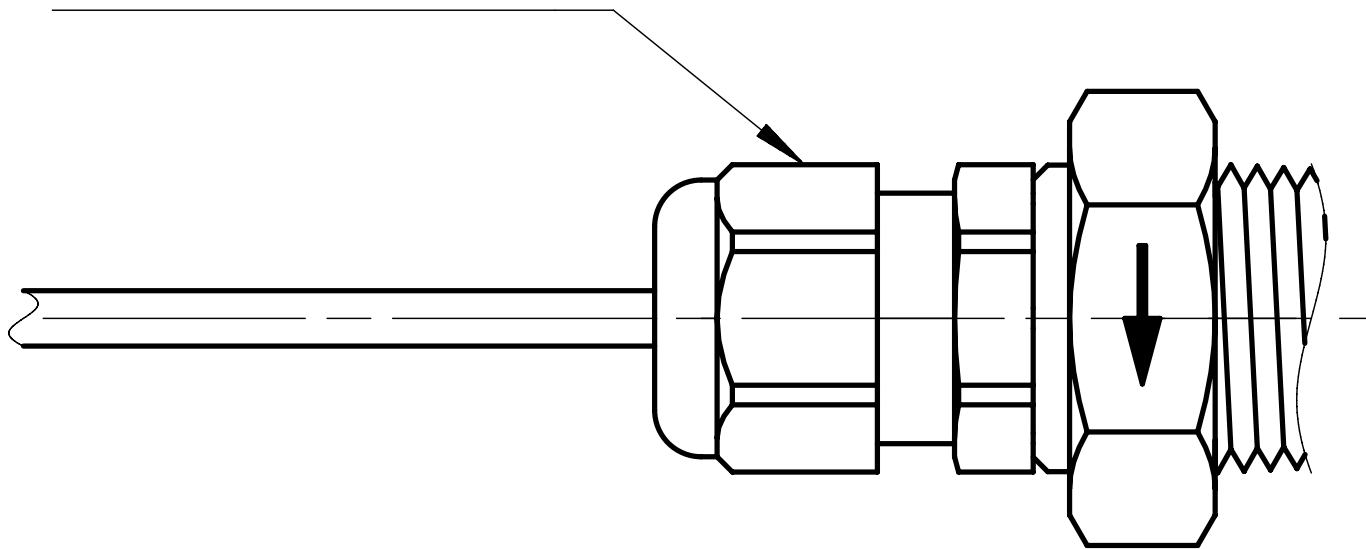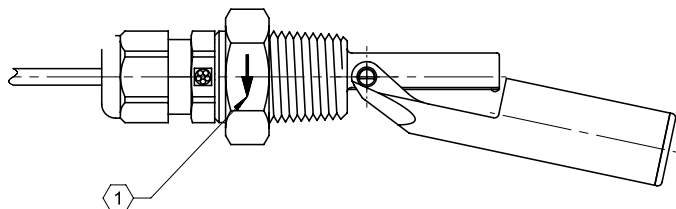207KS2.M..

BN ——— GN  
            WH

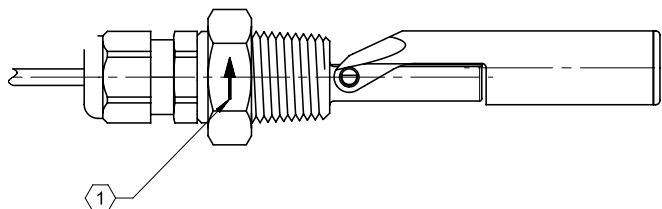

207KS0.M..  
207KS1.M..

BN ——— WH

207KS2.M..

BN ——— GN  
            WH



## Product options

IMAGE 1/1

### ORDERING KEY

207KS					Float switch side mount, mechanical hinge
					<b>Contact form</b>
	1				N.O./N.C. max. 250V
	2				C.O. max. 48V
					<b>Housing material</b>
		2			PP
		4			PA12
					<b>Connections</b>
			D		Connection thread M16x2, cable connection 1m, compression grommet
			M		Connection thread NPT 1/2, cable connection 1m, IP68
			N		Connection thread NPT 1/2, cable connection 1m
					<b>Other cable lengths*</b>
				-3	Cable length 3m
				-5	Cable length 5m
				-10	Cable length 10m
<b>Variant:</b>					
207KS14N05					Connection thread NPT 1/2, M12 connector, material PA12, N.O./N.C.
207KS24N02					Connection thread NPT 1/2, M12 connector, material PA12, C.O.

#### Optional

More materials for housings, compression grommets, cable sheathing on request

## Article characteristics

Attribute	207KS12D	207KS12N	207KS14D	207KS14N	207KS14N05	207KS22D ▶
Max. switching voltage	250 V DC					48 V DC
Max. switching voltage	250 V AC					48 V AC
Max. switching current	1 A					0.25 A
Max. switching power	50 W					3 W
Contact form	1A or 1B					1C
Output signal	digital					
Technology	Reed					
Float diameter	17 mm					
Version	Mechanical hinge					
Housing material	PP		PA12			PP
Float material	PP		PA12			PP
Cable material	PVC				-	PVC
Operating temperature min.	-25 °C					
Max. operating temperature	105 °C					
Pressure resistance	3 bar					
Protection class outside container	IP67 DIN EN 60529					
Protection class inside container	IP68 DIN EN 60529					
Mounting type	Compression grommet	Thread	Compression grommet	Thread	Compression grommet	
Thread	-	G 1/2 - 14NPT	-	G 1/2 - 14NPT	-	
Installation opening	D22-23	G 1/2 - 14NPT	D22-23	G 1/2 - 14NPT	D22-23	
Connector type	-				M12	-
Cable length	1 m				-	1 m

Attribute	207KS22N	207KS24D	207KS24N	ED207KS12D	ED207KS12N	ED207KS14D ▶
Max. switching voltage	48 V DC			-		
Max. switching voltage	48 V AC			-		
Max. switching current	0.25 A			-		
Max. switching power	3 W			-		
Contact form	1C			-		
Output signal	digital			-		
Technology	Reed			-		
Float diameter	17 mm			-		
Version	Mechanical hinge			-		
Housing material	PP	PA12		-		
Float material	PP	PA12		-		
Cable material	PVC			-		
Operating temperature min.	-25 °C			-		
Max. operating temperature	105 °C			-		
Pressure resistance	3 bar			-		
Protection class outside container	IP67 DIN EN 60529			-		
Protection class inside container	IP68 DIN EN 60529			-		
Mounting type	Thread	Compression grommet	Thread	-		
Thread	G 1/2 - 14NPT	-	G 1/2 - 14NPT	-		
Installation opening	G 1/2 - 14NPT	D22-23	G 1/2 - 14NPT	-		
Connector type	-			-		
Cable length	1 m			-		

Attribute	ED207KS14N	ED207KS14N05	ED207KS22D	ED207KS22N	ED207KS24D	ED207KS24N
Max. switching voltage				-		
Max. switching voltage				-		
Max. switching current				-		
Max. switching power				-		
Contact form				-		
Output signal				-		
Technology				-		
Float diameter				-		
Version				-		
Housing material				-		
Float material				-		
Cable material				-		
Operating temperature min.				-		
Max. operating temperature				-		
Pressure resistance				-		
Protection class outside container				-		
Protection class inside container				-		
Mounting type				-		
Thread				-		
Installation opening				-		
Connector type				-		
Cable length				-		