



Deutsch connector DT 06-8S 4-pin/8-pin


Product characteristics

- Suitable for tilt sensors N3/N4/N5

Technical drawing

IMAGE 1/3

L1HC00.B..

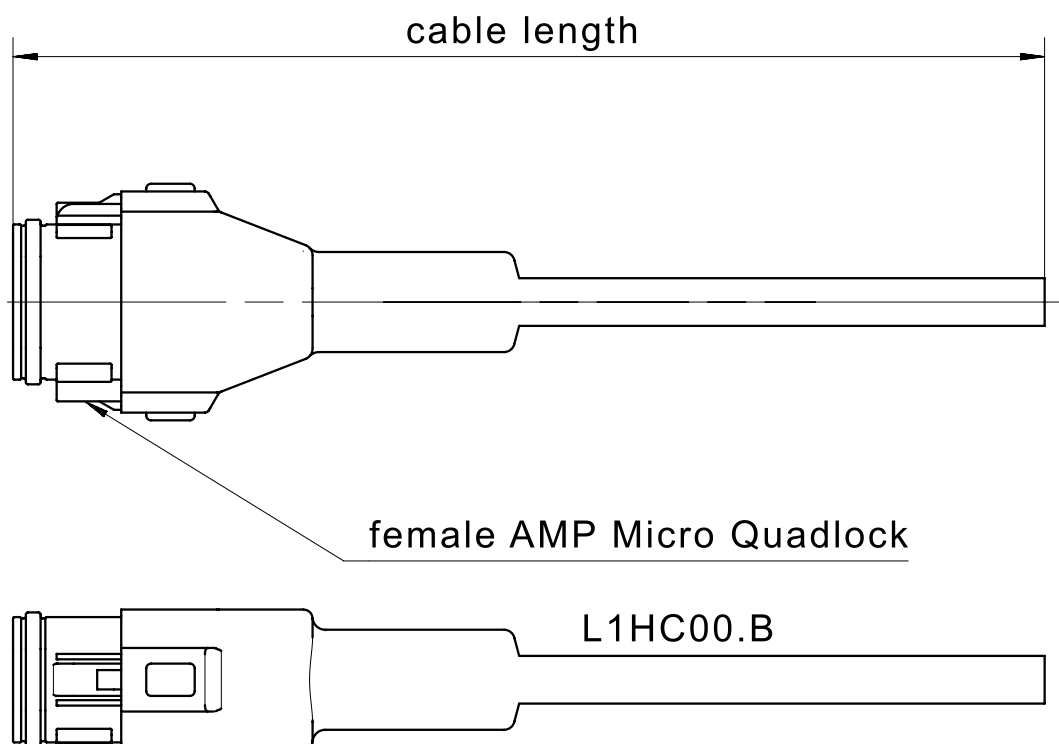


L1HC00.B

IMAGE 2/3


L1HC00.B

female AMP
Micro Quadlock



L1HC00.B4

female AMP
Micro Quadlock



L1HC00.B4A

female AMP
Micro Quadlock




IMAGE 3/3

L1HC00.B

1) ————— RD

2) ————— BN

3) ————— BU

4) ————— PK

5) ————— GN

6) ————— YE

7) ————— WH

8) ————— GY

L1HC00.B4

1) ————— BN

2) ————— BU

3) ————— BK

4) ————— GY

5) ————— nc

6) ————— nc

7) ————— nc

8) ————— nc

L1HC00.B4A

1) ————— BN

2) ————— BU

3) ————— nc

4) ————— nc

5) ————— BK

6) ————— GY

7) ————— nc

8) ————— nc

Product options

| | | |
|--------------|-----|--|
| IMAGE 1/1 | | |
| ORDERING KEY | | |
| L1HC00 | | Deutsch connector DT 06-8S |
| | 1 | Cable length 1m ± 30mm |
| | 3 | Cable length 3m ± 40mm |
| | 5 | Cable length 5m ± 60mm |
| | 0 | Cable length 10m ± 80mm |
| | B | 8-pin |
| | B4 | 4-pin |
| | B4A | 4-pin |
| | | |
| | | Other cable materials and cable lengths on request |

Article characteristics

| Attribute | L1HC...B | L1HC...B4 | L1HC...B4A |
|----------------------------|-----------------------------------|---------------|------------|
| Cable material | PVC | | |
| Operating temperature min. | -40 °C | | |
| Max. operating temperature | 80 °C | | |
| Min. storage temperature | -40 °C | | |
| Max. storage temperature | 80 °C | | |
| Connector type | Deutsch connector DT 06-8S socket | | |
| Cable length | 10 m | | |
| Cable diameter | 7,5 +/-0,2 mm | 5,5 +/-0,3 mm | |
| Number of pins | 8 | | |
| Number of strands | 8 | 4 | |
| Wire cross section | 0.5 mm² | | |