



## Miniature float switch 207A

elobau miniature float switch 207A with G 3/4 thread is used for level detection in tank monitoring, water processing, medical applications as well as in ink monitoring for automatic ink supply in industrial printers.

Float switch 207A is ideal for use in extremely tight spaces, as the outside mounting requires minimal installation space, and it has an extremely narrow float.

At elobau, you set the standard. The miniature float switch can be fully customised using our online configurator.

### Product characteristics

- Level measurement on reed-contact basis
- Mounting options: G 3/4
- Material: housing – PVC / float – PP
- Switching voltage max. 48 V
- Contact form: N.O., N.C., changeover
- One switching point as standard
- Temperature range -10 °C to +65 °C
- IP67 protection class

Technical drawing

IMAGE 1/2

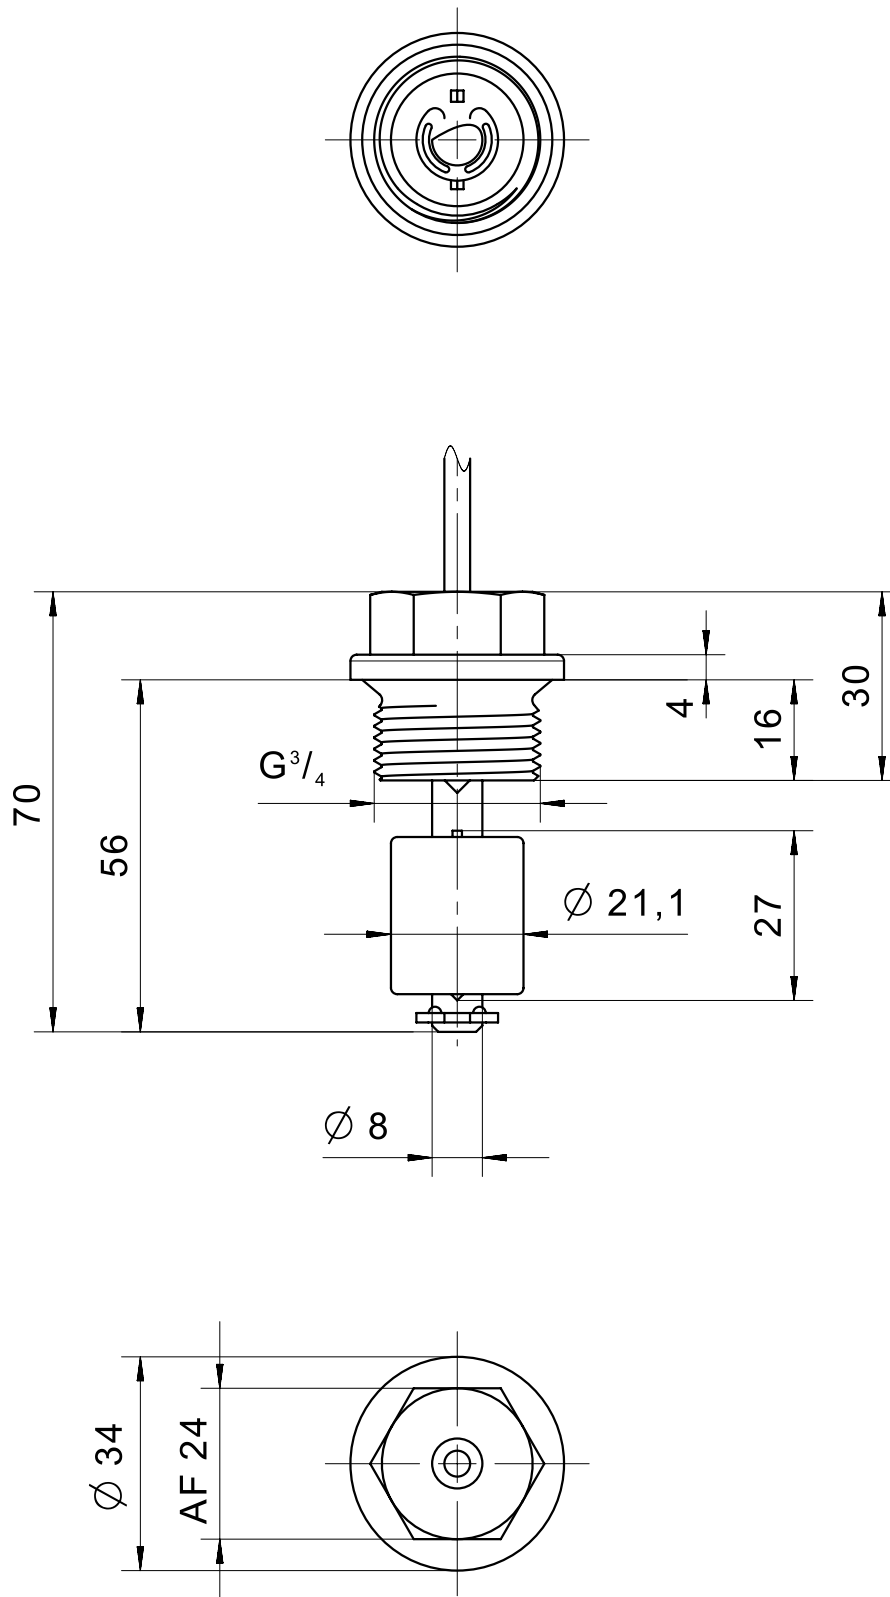


IMAGE 2/2

207A1..

BN ———— / ———— WH

207A2..

BN ———— \ ———— WH

207A3..

BN ———— / ———— BU  
BK

## Product options

IMAGE 1/1

### ORDERING KEY

207A			Miniature float switch G3/4
	10		N.O. - material PVC/PP - cable connection 1 m
	20		N.C. - material PVC/PP - cable connection 1 m
	30		Changeover contact - material PVC/PP - cable connection 1 m
			<b>Other available cable lengths</b>
		-3	3 m
		-5	5 m
		-10	10 m
			Other cable materials and cable lengths on request

## Article characteristics

Attribute	207A10	207A20	207A30	ED207A10	ED207A20	ED207A30
Max. switching voltage	48 V DC			-		
Max. switching voltage	48 V AC			-		
Max. switching current	0.5 A		0.3 A	-		
Max. switching power	10 W		3 W	-		
Contact form	1A	1B	1C	-		
Output signal	digital			-		
Technology	Reed			-		
Switching point function	Rising level			-		
Change of switching function by turning the float	no	yes	no	-		
Recommended minimum density of the medium	0.7 g/cm <sup>3</sup>			-		
Float diameter	21 mm			-		
Version	Straight			-		
Housing material	PVC			-		
Float material	PP			-		
Riser material	PVC			-		
Cable material	PVC			-		
Operating temperature min.	-10 °C			-		
Max. operating temperature	65 °C			-		
Pressure resistance	3 bar			-		
Protection class outside container	IP67 DIN EN 60529			-		
Protection class inside container	IP68 DIN EN 60529			-		
Installation	from outside			-		
Mounting type	Thread			-		
Thread	G 3/4			-		
Riser diameter	8 mm			-		
Riser length	56 mm			-		
Installation opening	G 3/4			-		
Torque	10 N m			-		
Connector type	-			-		
Cable length	1 m			-		