



## Connecteur rond M12 4 pôles/5 pôles/8 pôles avec bouchon vissable, plastique

### Caractéristiques du produit

- Bonne résistance aux produits chimiques et à l'huile
- Homologation Ecolab
- Indice de protection élevé et plage de température étendue répondant aux exigences des environnements industriels difficiles
- Adapté à tous les capteurs et les détecteurs de niveau à flotteur avec raccord correspondant

### Dessin technique

PHOTO 1/9

K14.00.K

female M12

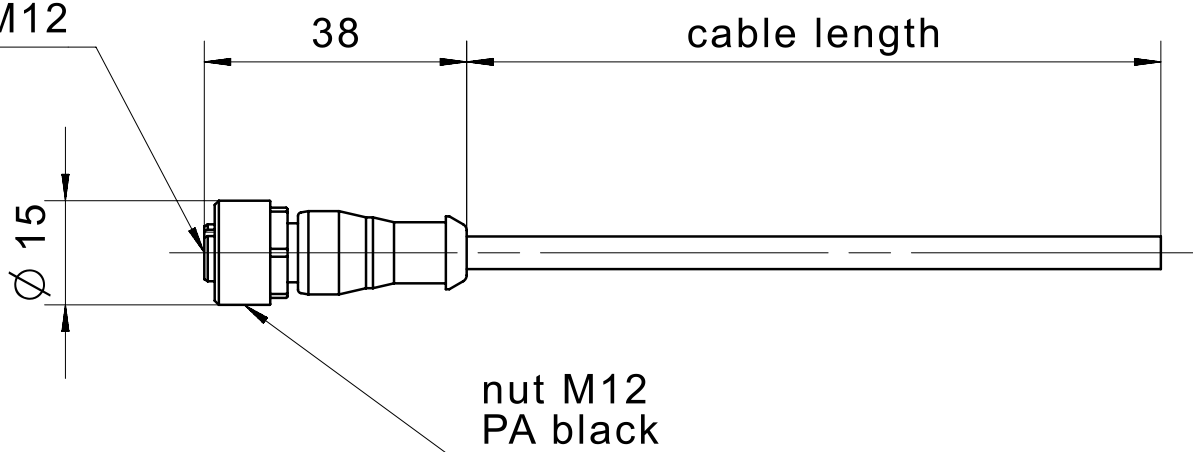


PHOTO 2/9

# female M12

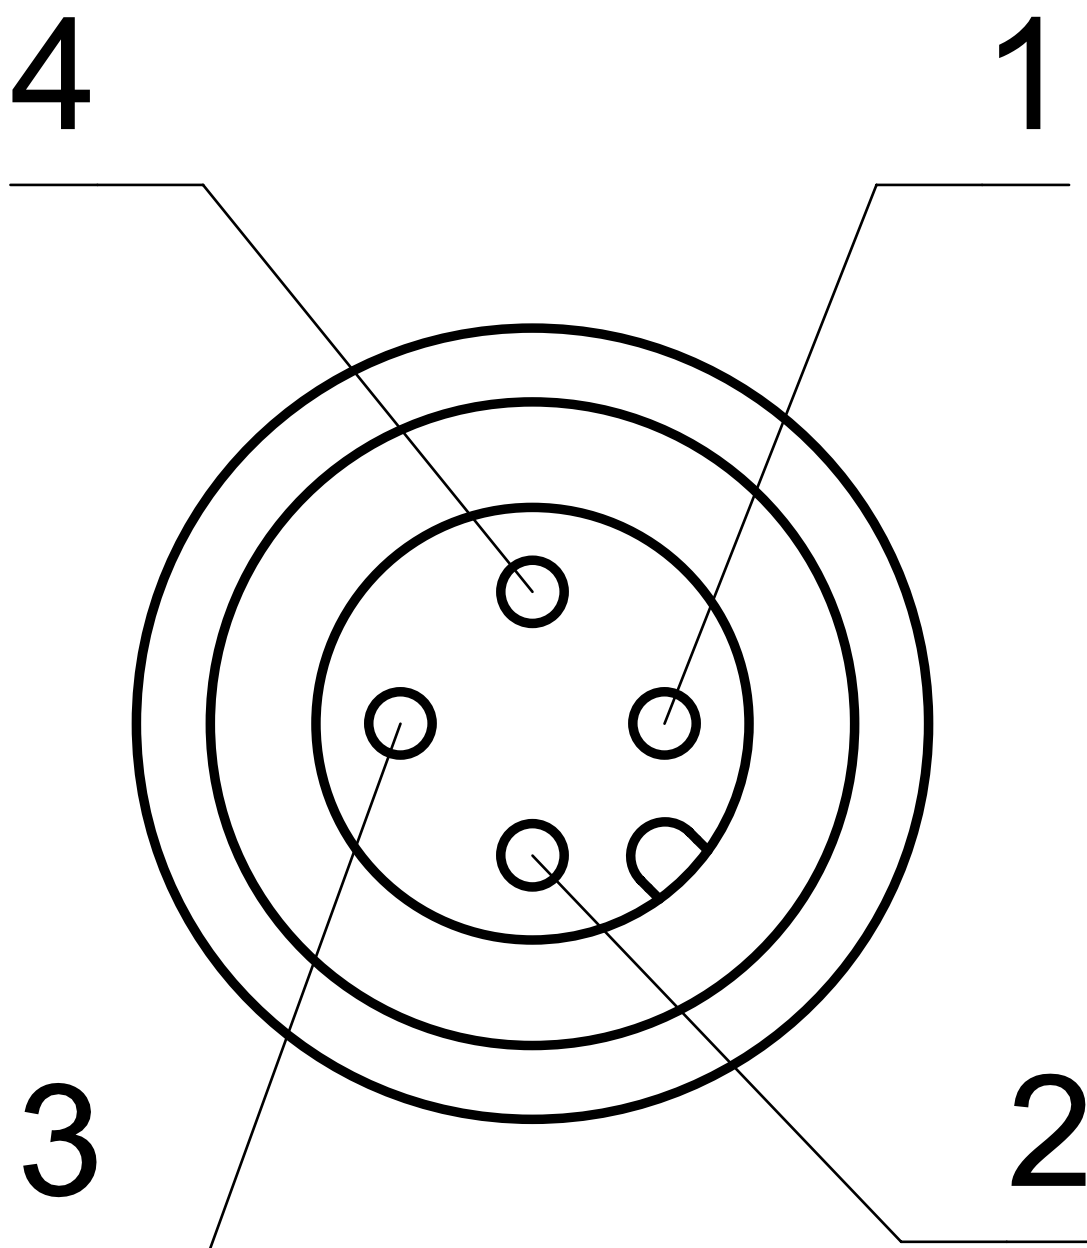


PHOTO 3/9

1 ) ————— **BN**

2 ) ————— **WH**

3 ) ————— **BU**

4 ) ————— **BK**

PHOTO 4/9

**K16.00.K**

female M12

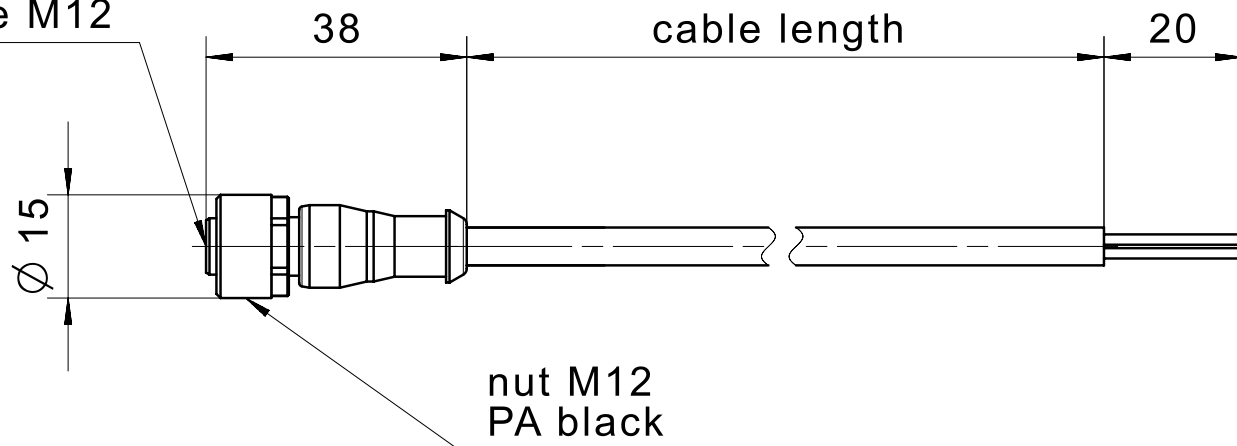


PHOTO 5/9

# female M12

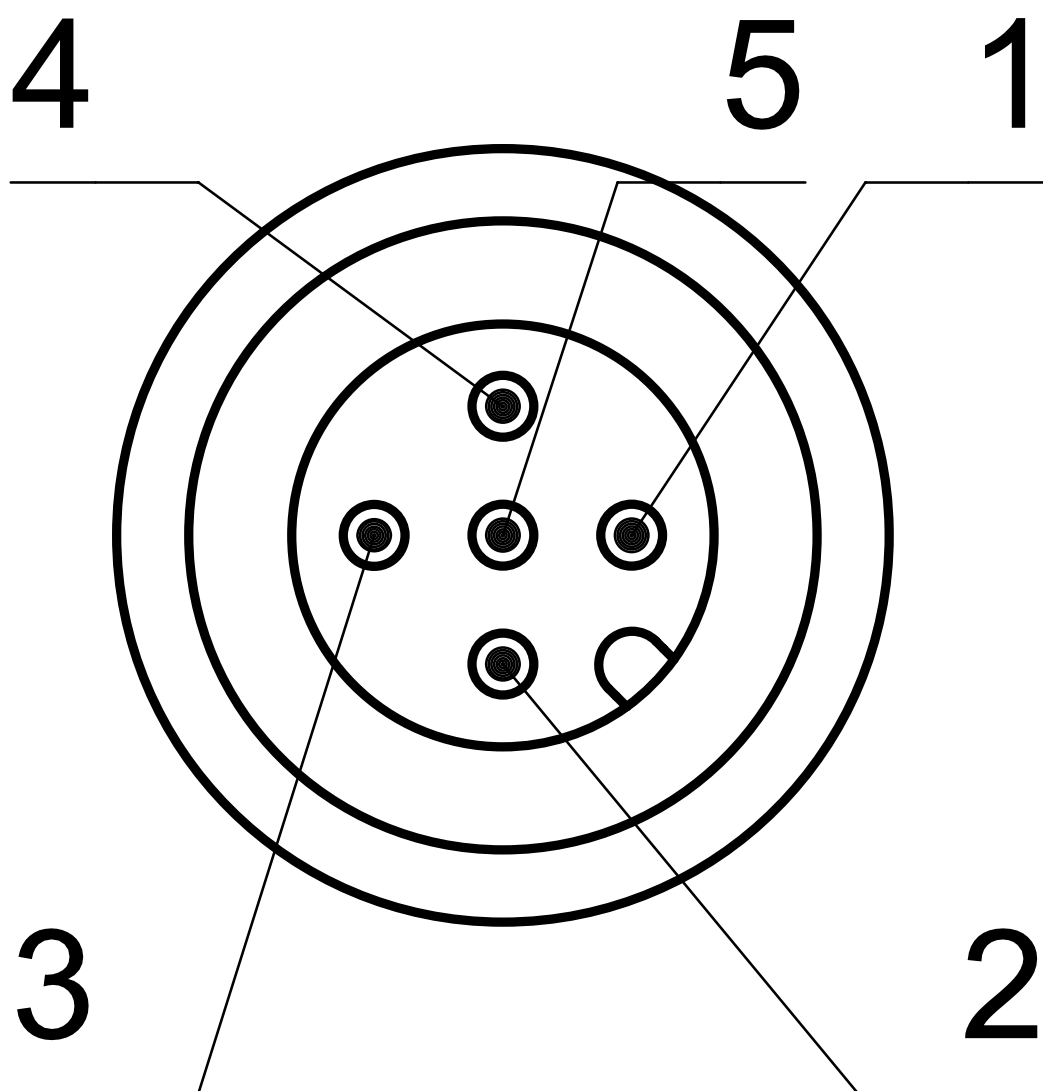


PHOTO 6/9

1 ) \_\_\_\_\_ BN

2 ) \_\_\_\_\_ WH

3 ) \_\_\_\_\_ BU

4 ) \_\_\_\_\_ BK

5 ) \_\_\_\_\_ GY

PHOTO 7/9

K18.00.K

female M12

Ø 15

44

cable length

nut M12  
PA black

PHOTO 8/9

# female M12

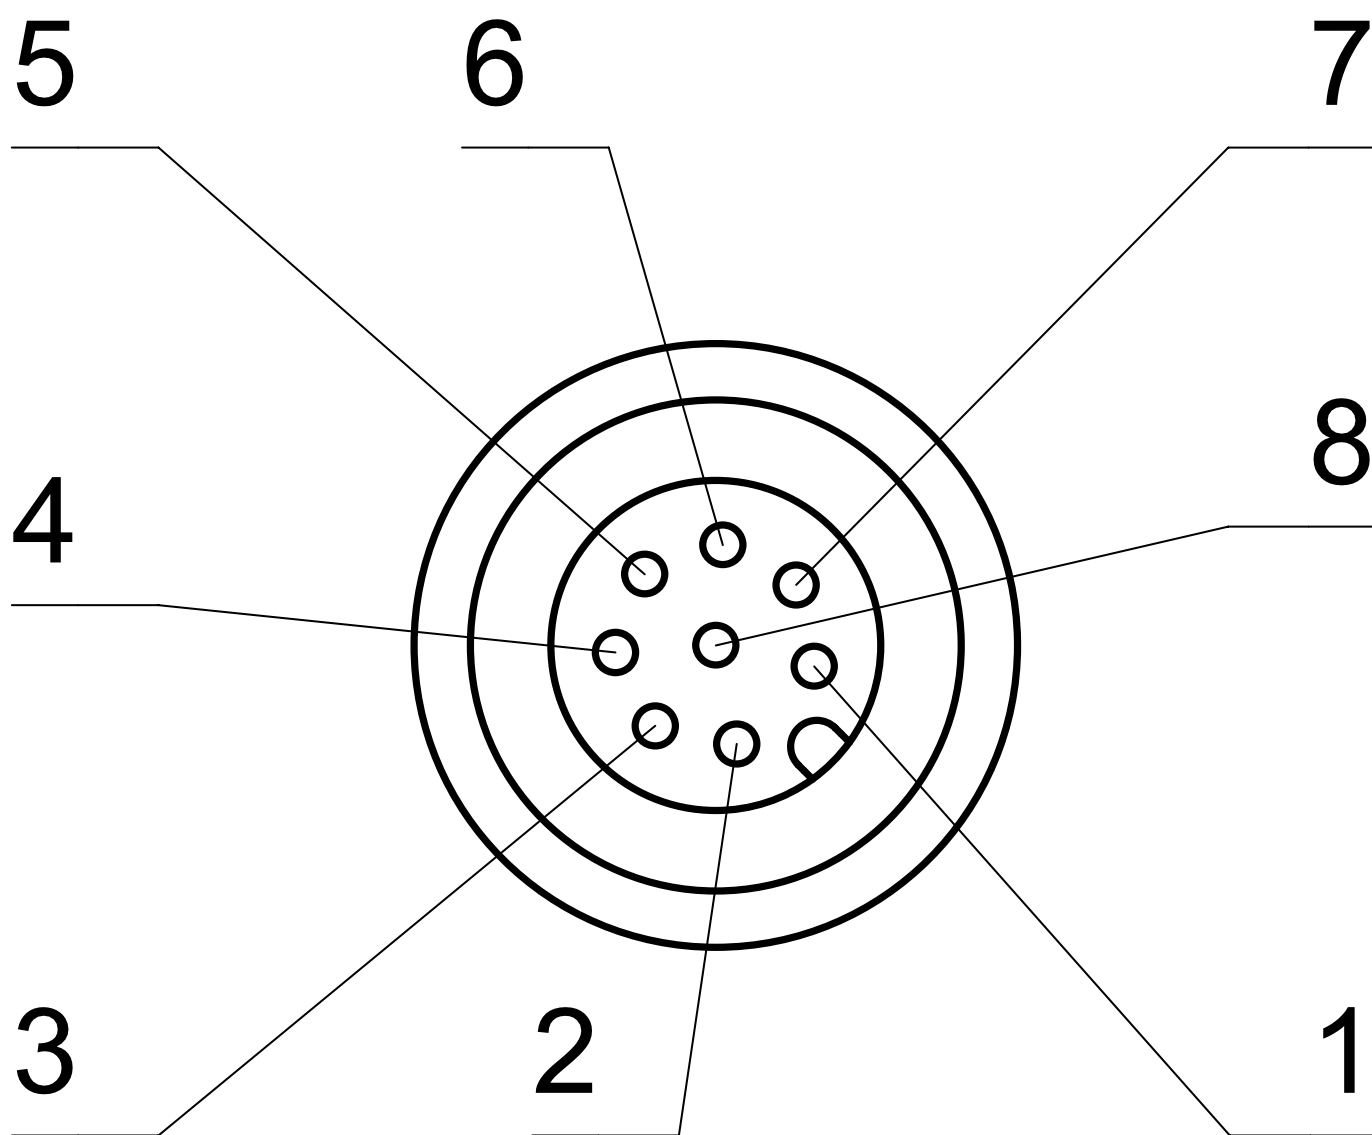




PHOTO 9/9

1 ) ————— BN

2 ) ————— WH

3 ) ————— BU

4 ) ————— BK

5 ) ————— GY

6 ) ————— PK

7 ) ————— VT

8 ) ————— OG

## Options de produit

PHOTO 1/1

### ORDERING KEY

K1			Circular connector M12 4-pin/5-pin/8-pin with coupling ring, plastic
	4G		Sheath material PVC, black, 4-pin
	6G		Sheath material PVC, black, 5-pin
	6H		Sheath material PUR, black, 5-pin
	8G		Sheath material PVC, black, 8-pin
		001K	Cable length 1m ± 30mm
		003K	Cable length 3m ± 40mm
		005K	Cable length 5m ± 60mm
		000K	Cable length 10m ± 80mm
			Other cable materials and cable lengths on request