



Connecteur rond M12 4 pôles/5 pôles/8 pôles avec bouchon vissable, plastique

Caractéristiques du produit

- Bonne résistance aux produits chimiques et à l'huile
- Homologation Ecolab
- Indice de protection élevé et plage de température étendue répondant aux exigences des environnements industriels difficiles
- Adapté à tous les capteurs et les détecteurs de niveau à flotteur avec raccord correspondant

Dessin technique

PHOTO 1/9

K14.00.K

female M12

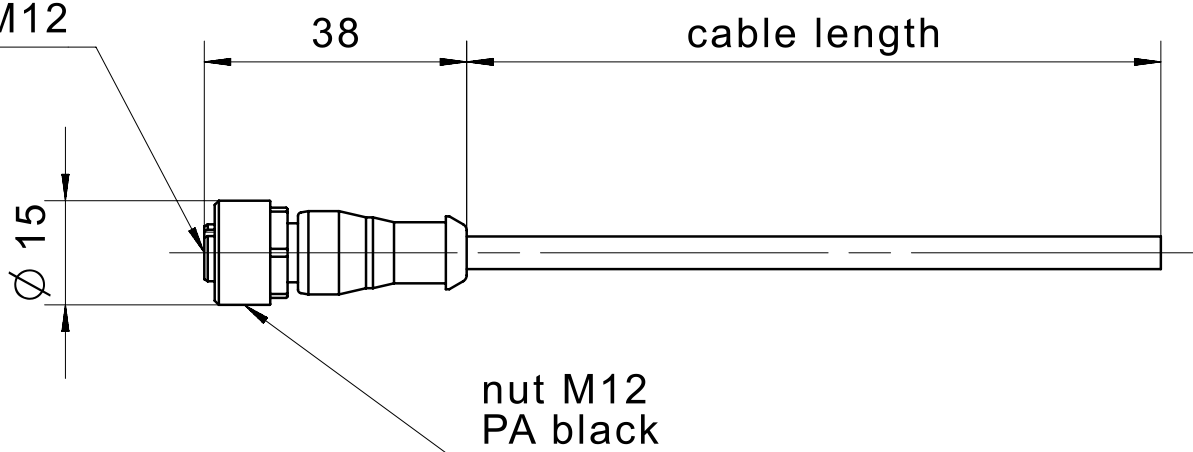


PHOTO 2/9

female M12



PHOTO 3/9

1) ————— **BN**

2) ————— **WH**

3) ————— **BU**

4) ————— **BK**

PHOTO 4/9

K16.00.K

female M12

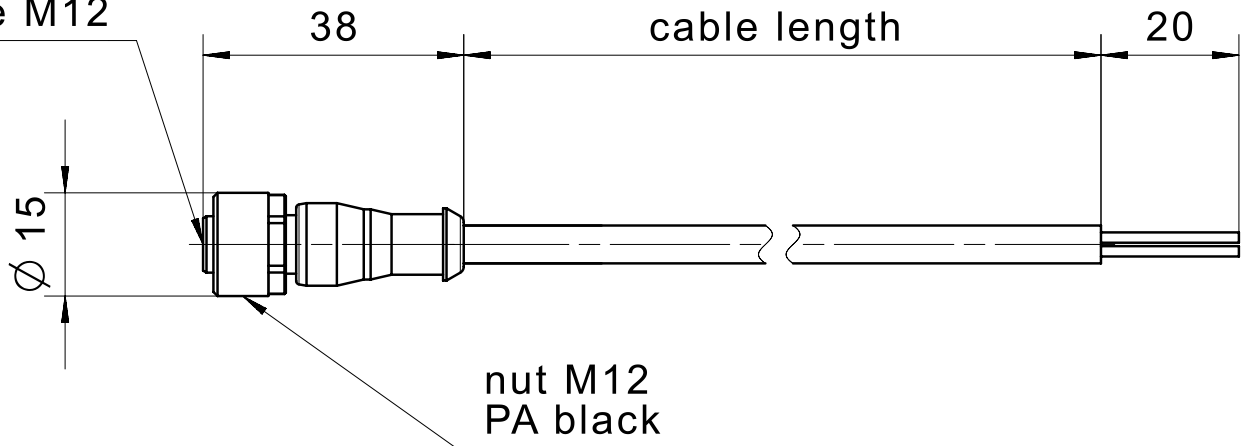


PHOTO 5/9

female M12



PHOTO 6/9

1) ————— BN

2) ————— WH

3) ————— BU

4) ————— BK

5) ————— GY

PHOTO 7/9

K18.00.K

female M12

Ø 15

44

cable length

nut M12
PA black

PHOTO 8/9

female M12



PHOTO 9/9

1) ————— BN

2) ————— WH

3) ————— BU

4) ————— BK

5) ————— GY

6) ————— PK

7) ————— VT

8) ————— OG

Options de produit

PHOTO 1/1

ORDERING KEY

K1			Circular connector M12 4-pin/5-pin/8-pin with coupling ring, plastic
	4G		Sheath material PVC, black, 4-pin
	6G		Sheath material PVC, black, 5-pin
	6H		Sheath material PUR, black, 5-pin
	8G		Sheath material PVC, black, 8-pin
		001K	Cable length 1m ± 30mm
		003K	Cable length 3m ± 40mm
		005K	Cable length 5m ± 60mm
		000K	Cable length 10m ± 80mm
			Other cable materials and cable lengths on request