



Conector Deutsch DT 06-6S 3/6 pinos

Especificação Técnica

- Para sensores de ângulo modelos 424RA, 424D e 424C

Desenho técnico

IMAGE 1/3

L1.D.0.B


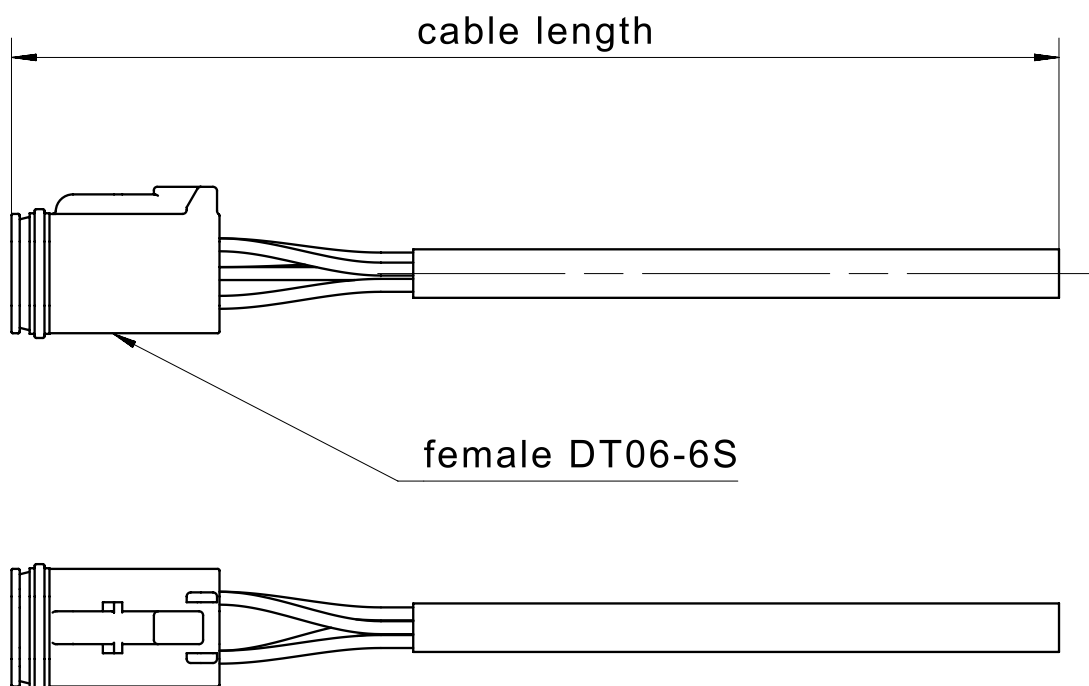


IMAGE 2/3

L1FD.0.B

female DT06-6S

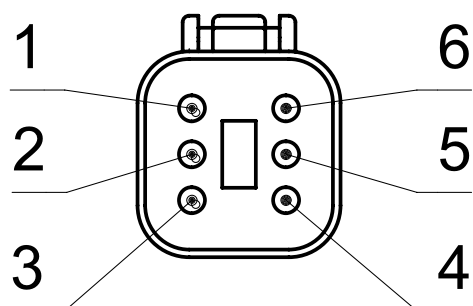

L1ZD.0.B

female DT06-6S

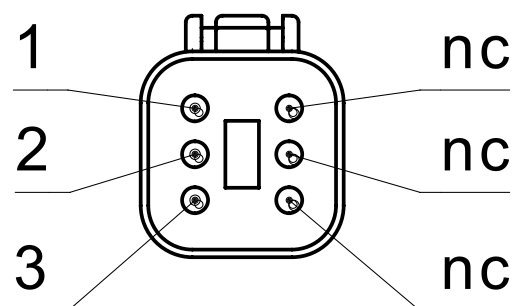


IMAGE 3/3

L1FD.0.B

1) ————— BK1

2) ————— BK2

3) ————— BK3

4) ————— BK4

5) ————— BK5

6) ————— BK6

L1ZD.0.B

1) ————— BU

2) ————— BN

3) ————— BK

4) ————— nc

6) ————— nc

6) ————— nc

Product options

IMAGE 1/1

ORDERING KEY

| L1 | | | | Deutsch connector DT 06-6S |
|----|----|---|-----|--|
| | FD | | | 6-pin |
| | ZD | | | 3-pin |
| | | 0 | | Sheath material PVC, grey |
| | | 1 | | Sheath material PUR, black |
| | | | 01B | Cable length 1m ± 30mm |
| | | | 03B | Cable length 3m ± 40mm |
| | | | 05B | Cable length 5m ± 60mm |
| | | | 00B | Cable length 10m ± 80mm |
| | | | | |
| | | | | Other cable materials and cable lengths on request |

Características do artigo

| Attribute | L1FD0..B | L1FD1..B | L1ZD0..B | L1ZD1..B |
|----------------------------|-----------------------------------|----------------|---------------|---------------|
| Cable material | PVC | PUR | PVC | PUR |
| Operating temperature min. | -40 °C | -30 °C | | -20 °C |
| Max. operating temperature | 80 °C | | 105 °C | 80 °C |
| Min. storage temperature | -40 °C | -30 °C | | -20 °C |
| Max. storage temperature | 80 °C | | 105 °C | 80 °C |
| Connector type | Deutsch connector DT 06-6S socket | | | |
| Cable diameter | 7,5 mm | 8,2 +/-0,25 mm | 6,2 +/-0,2 mm | 5,7 +/-0,2 mm |
| Number of pins | 6 | | | |
| Number of strands | 6 | | 3 | |
| Wire cross section | 0.75 mm² | | | |
| Cable length | Selectable (1m, 3m, 5m, 10m) | | | |