
elobau GmbH & Co. KG
Zeppelinstr. 44
88299 Leutkirch, Germany

Tel.: +49 (0) 7561 970-0
Fax: +49 (0) 7561 970-100

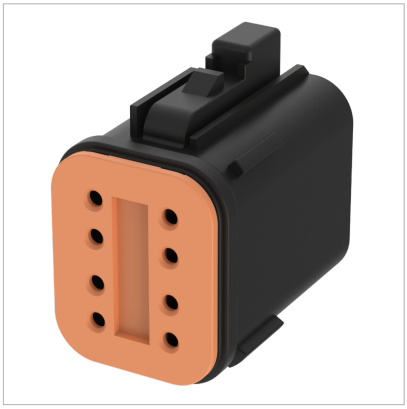


Conector Deutsch DT 06-8S 4/8 pinos

Especificação Técnica

- Para sensores de inclinação N3/N4/N5

Desenho técnico

IMAGE 1/3

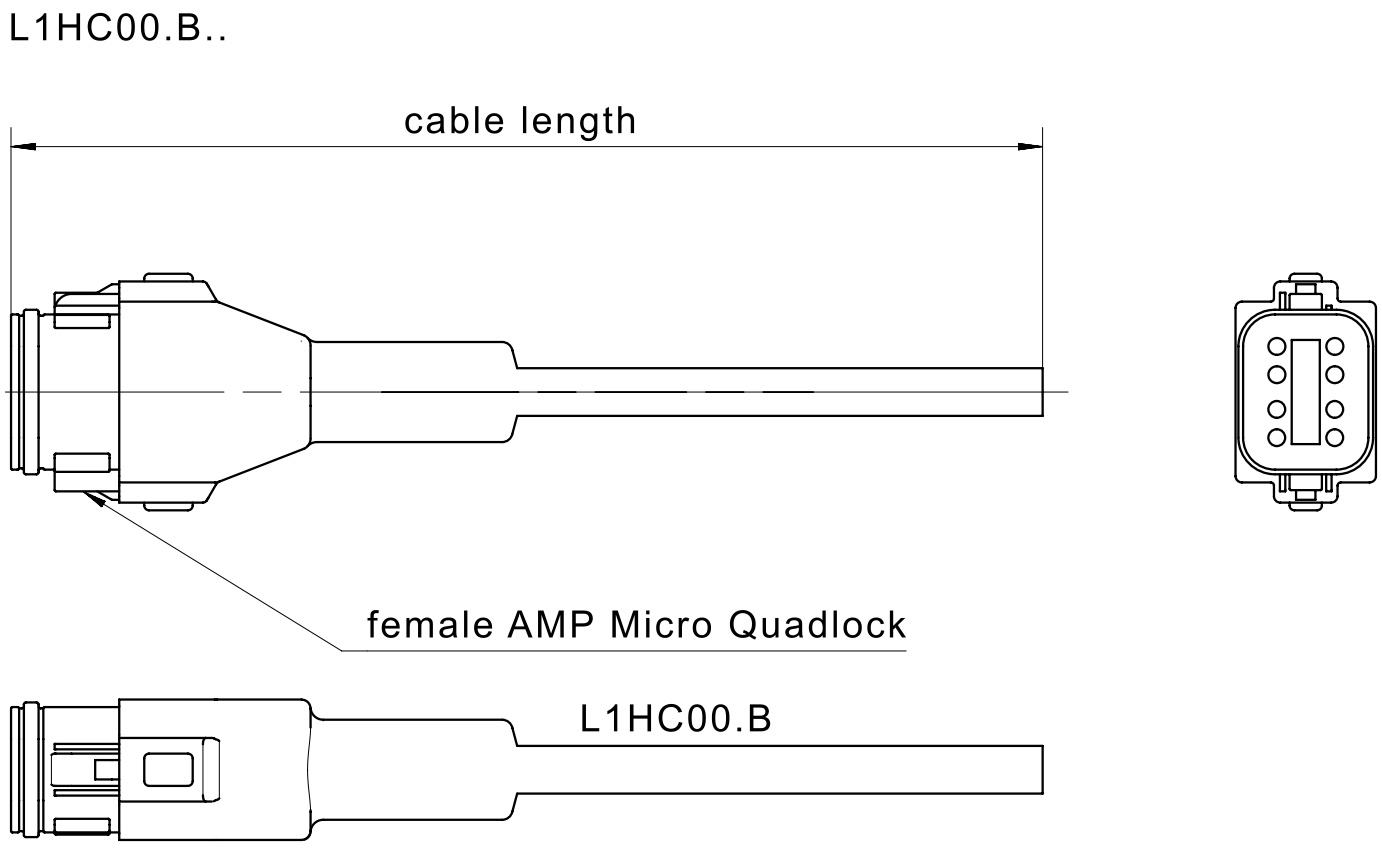


elobau GmbH & Co. KG
Zeppelinstr. 44
88299 Leutkirch, Germany

Tel.: +49 (0) 7561 970-0
Fax: +49 (0) 7561 970-100

IMAGE 2/3


L1HC00.B

female AMP
Micro Quadlock



L1HC00.B4

female AMP
Micro Quadlock



L1HC00.B4A

female AMP
Micro Quadlock




IMAGE 3/3

L1HC00.B

1	RD
2	BN
3	BU
4	PK
5	GN
6	YE
7	WH
8	GY

L1HC00.B4

1	BN
2	BU
3	BK
4	GY
5	nc
6	nc
7	nc
8	nc

L1HC00.B4A

1	BN
2	BU
3	nc
4	nc
5	BK
6	GY
7	nc
8	nc

elobau GmbH & Co. KG
Zeppelinstr. 44
88299 Leutkirch, Germany

Tel.: +49 (0) 7561 970-0
Fax: +49 (0) 7561 970-100

Product options

IMAGE 1/1

ORDERING KEY

L1HC00		Deutsch connector DT 06-8S
	1	Cable length 1m ± 30mm
	3	Cable length 3m ± 40mm
	5	Cable length 5m ± 60mm
	0	Cable length 10m ± 80mm
	B	8-pin
	B4	4-pin
	B4A	4-pin
		Other cable materials and cable lengths on request

elobau GmbH & Co. KG
Zeppelinstr. 44
88299 Leutkirch, Germany

Tel.: +49 (0) 7561 970-0
Fax: +49 (0) 7561 970-100

Características do artigo

Attribute	L1HC...B	L1HC...B4	L1HC...B4A
Cable material	PVC		
Operating temperature min.	-40 °C		
Max. operating temperature	80 °C		
Min. storage temperature	-40 °C		
Max. storage temperature	80 °C		
Connector type	Deutsch connector DT 06-8S socket		
Cable diameter	7,5 +/-0,2 mm	5,5 +/-0,3 mm	
Number of pins	8		
Number of strands	8	4	
Wire cross section	0.5 mm²		
Cable length	Selectable (1m, 3m, 5m, 10m)		