



## Conector Deutsch DT 06-8S 4/8 pinos



### Especificação Técnica

- Para sensores de inclinação N3/N4/N5

### Desenho técnico

IMAGE 1/3

L1HC00.B..

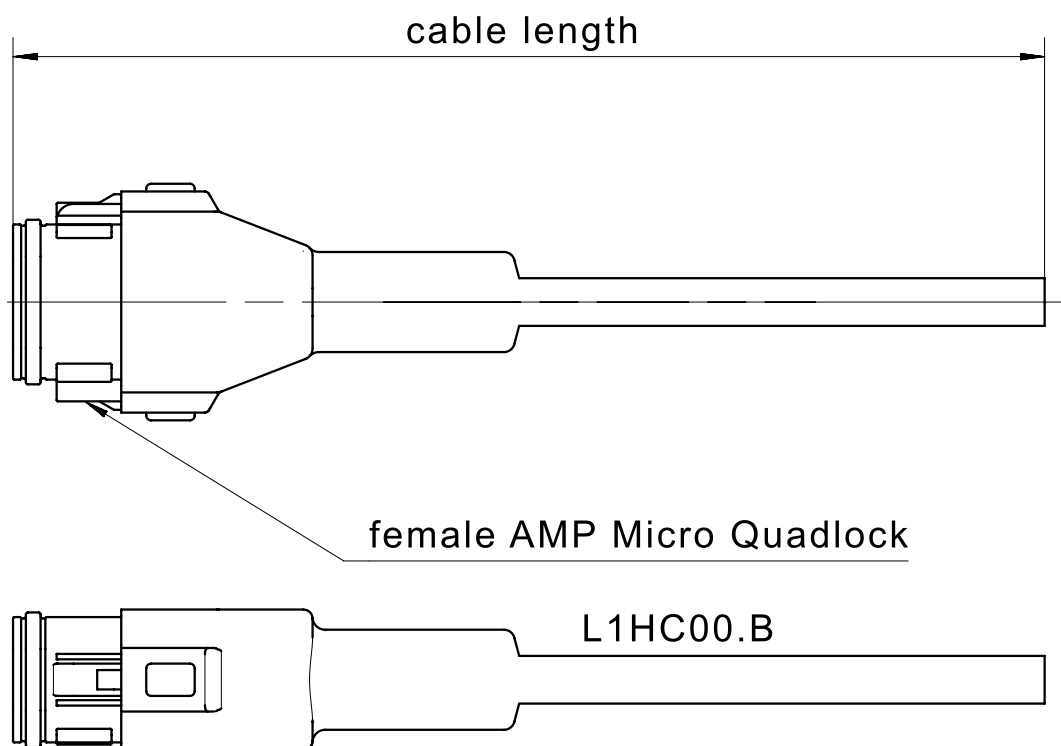


L1HC00.B

IMAGE 2/3


### L1HC00.B

female AMP  
Micro Quadlock



### L1HC00.B4

female AMP  
Micro Quadlock



### L1HC00.B4A

female AMP  
Micro Quadlock




IMAGE 3/3

### L1HC00.B

1) ————— RD

2) ————— BN

3) ————— BU

4) ————— PK

5) ————— GN

6) ————— YE

7) ————— WH

8) ————— GY

### L1HC00.B4

1) ————— BN

2) ————— BU

3) ————— BK

4) ————— GY

5) ————— nc

6) ————— nc

7) ————— nc

8) ————— nc

### L1HC00.B4A

1) ————— BN

2) ————— BU

3) ————— nc

4) ————— nc

5) ————— BK

6) ————— GY

7) ————— nc

8) ————— nc

## Product options

IMAGE 1/1

### ORDERING KEY

L1HC00		Deutsch connector DT 06-8S
	1	Cable length 1m $\pm$ 30mm
	3	Cable length 3m $\pm$ 40mm
	5	Cable length 5m $\pm$ 60mm
	0	Cable length 10m $\pm$ 80mm
	B	8-pin
	B4	4-pin
	B4A	4-pin
		Other cable materials and cable lengths on request

## Características do artigo

Attribute	L1HC...B	L1HC...B4	L1HC...B4A
Cable material	PVC		
Operating temperature min.	-40 °C		
Max. operating temperature	80 °C		
Min. storage temperature	-40 °C		
Max. storage temperature	80 °C		
Connector type	Deutsch connector DT 06-8S socket		
Cable diameter	7,5 +/-0,2 mm	5,5 +/-0,3 mm	
Number of pins	8		
Number of strands	8	4	
Wire cross section	0.5 mm²		
Cable length	Selectable (1m, 3m, 5m, 10m)		