elobau GmbH & Co. KG
Zeppelinstr. 44
88299 Leutkirch, Germany

Tel.: +49 (0) 7561 970-0
Fax: +49 (0) 7561 970-100



eloProg - Controlador de segurança modular programável - Módulo relé 485EPR

Os módulos de expansão com saídas tipo relé oferecem até 4 contatos NA. Estes módulos foram desenvolvidos para operar com correntes de 6A e 240 V CA. Além disso, até 8 saídas de controle eletrônico estão disponíveis para diagnóstico.

Especificação Técnica


- Até 4 saídas tipo relé redundantes (contato NA)
- Diagnóstico através de até 4 saídas de controle configuráveis e LEDs
- Até 4 entradas tipo EDM para monitoramento de contatores e acionamento de botão de partida
- Saída EDM para retorno ao módulo básico ou módulos de expansão de saídas
- Com opção de conector tipo T (barramento 5-vias) ou conexão via cabo/terminal

elobau GmbH & Co. KG
Zeppelinstr. 44
88299 Leutkirch, Germany

Tel.: +49 (0) 7561 970-0
Fax: +49 (0) 7561 970-100

Desenho técnico

IMAGE 1/1

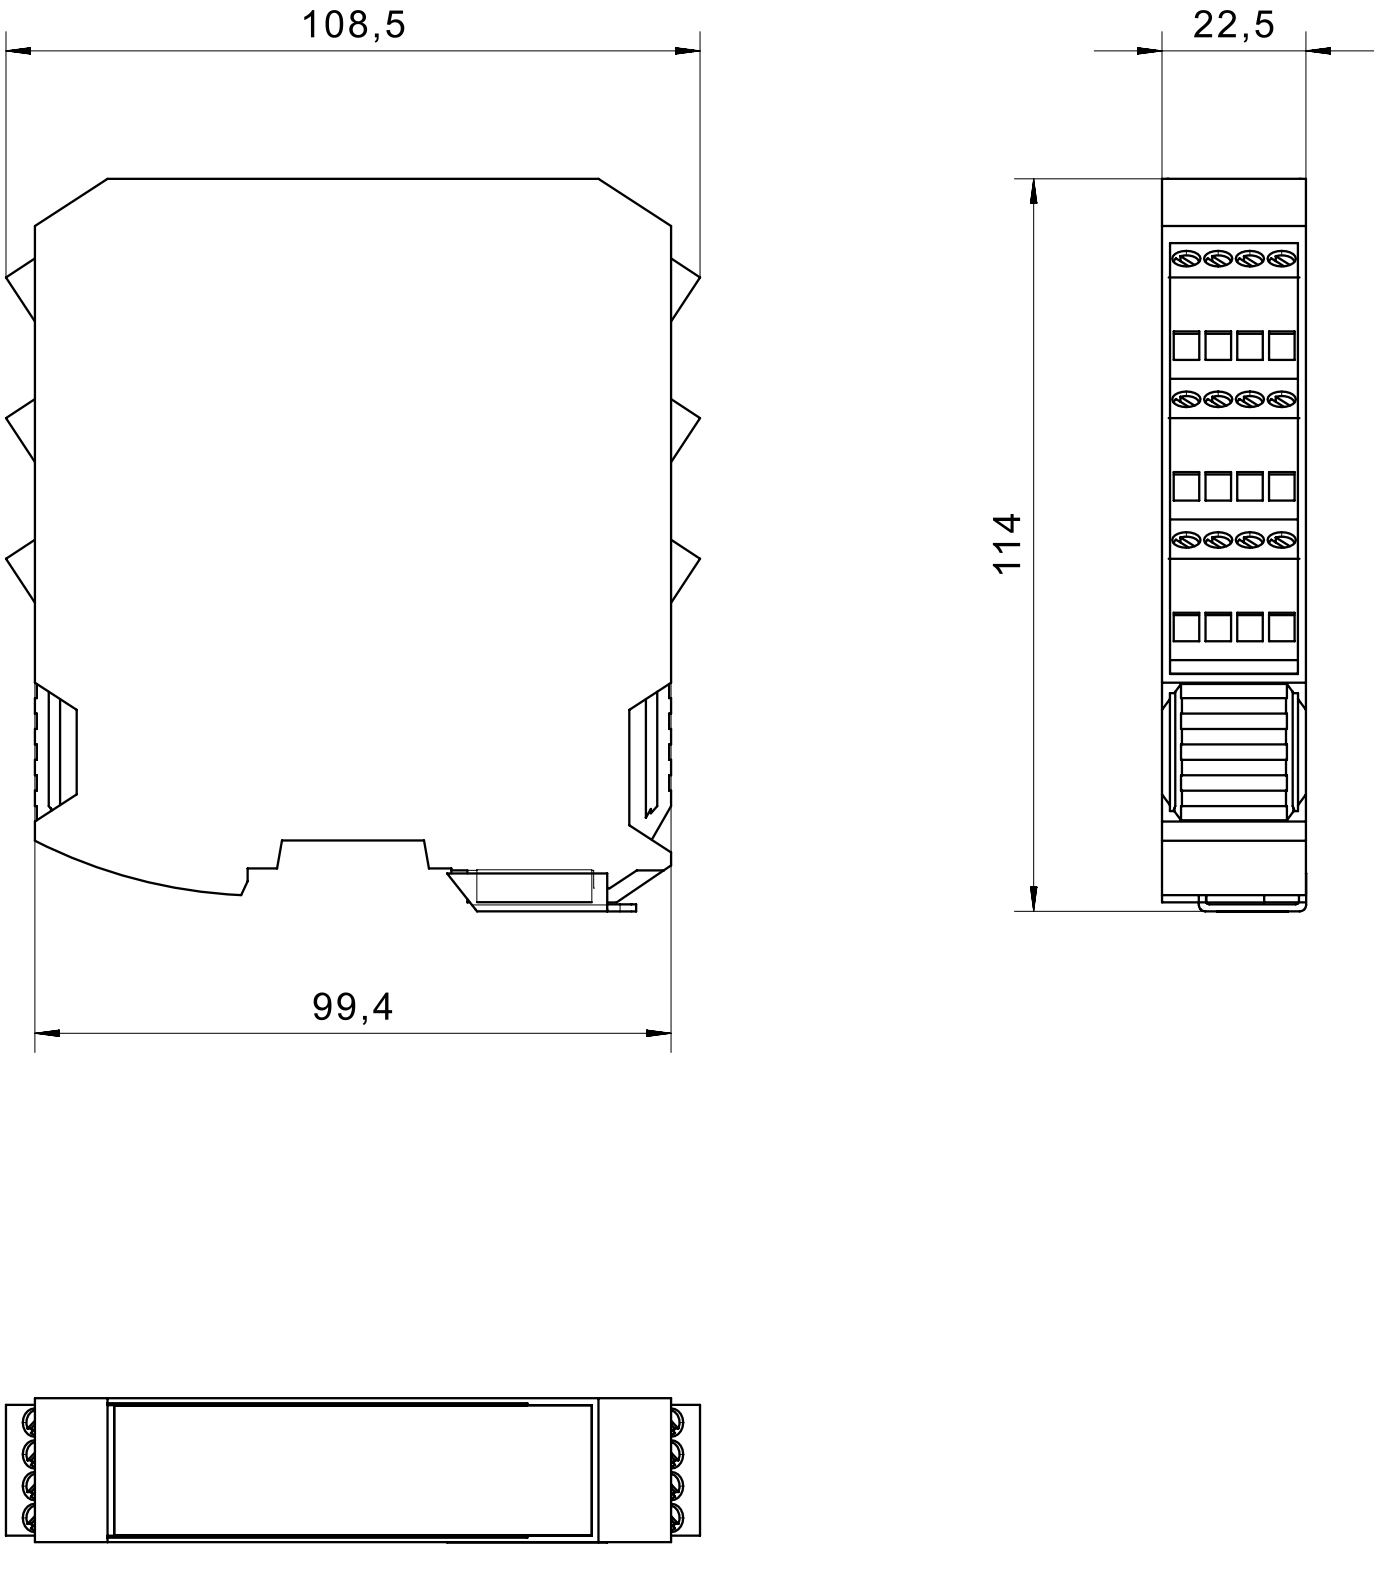

elobau GmbH & Co. KG
Zeppelinstr. 44
88299 Leutkirch, Germany

Tel.: +49 (0) 7561 970-0
Fax: +49 (0) 7561 970-100

Product options

IMAGE 1/1

ORDERING KEY

485EP	R			Relay module
		02		2 safe relay outputs
		04		4 safe relay outputs
		04	S08B	4 safe relay outputs / 8 status outputs – bus-compatible

elobau GmbH & Co. KG
Zeppelinstr. 44
88299 Leutkirch, Germany

Tel.: +49 (0) 7561 970-0
Fax: +49 (0) 7561 970-100

Características do artigo

Attribute	485EPR02	485EPR04	485EPR04S08B
Utilization category	AC-15 / DC-13		–
DC	Depending on the configuration %		
Connection to output module	–		via connection terminals
Min. switching voltage at safety output	10 V DC		
Max. switching voltage at safety output	250 V DC		
Min. switching voltage at safety output	10 V AC		
Max. switching voltage at safety output	400 V AC	230 V AC	400 V AC
Min. switching current at safety output	0.02 A		
Max. switching current at safety output	6 A		
Max. switching current at control output	–		0.1 A
Response time	12 ms		
Number of relay safety outputs	2	4	
Number of relay control outputs	–		8
Feedback circuit	yes		Depending on the configuration
Operating voltage min.	19.2 V DC		
Operating voltage max.	28.8 V DC		
Power consumption	3 W		
LED display	single-coloured		No
PL acc. to EN ISO 13849-1	e		
SIL acc. to IEC 61508	3		
SIL CL acc. to IEC 62061	3		
PFHD according to IEC 61508	depending on the configuration 1/h		1,30 x 10-9 1/h
Safe Failure Fraction (SFF) to IEC 61508	–		99.7 %
Operating life	20 Tm		
Max no operating cycles at 1A switching current AC15 230V(B10d)	750000		–

elobau GmbH & Co. KG
Zeppelinstr. 44
88299 Leutkirch, Germany

Tel.: +49 (0) 7561 970-0
Fax: +49 (0) 7561 970-100

Attribute	485EPR02	485EPR04	485EPR04S08B
Max no operating cycles at 2A switching current DC13 24V (B10d)	10000000		–
Max no operating cycles at 3A switching current AC15 230V(B10d)	300000		–
Service life, mechanical (Cycles)	> 20 x 10^6		> 40 x 106
Dimensions	108 x 22,5 x 114,5 mm (H/B/T)		
Housing material	PA		
Housing colour	Gehaeuse schwarz Frontplatte gelb		
Protection class, housing	IP20 DIN EN 60529		IP54 DIN EN 60529
Operating temperature min.	-10 °C		
Max. operating temperature	55 °C		
Min. storage temperature	-20 °C		
Max. storage temperature	85 °C		
Relative humidity	10...95 %		
Mounting type	Mounting rail		
Weight	181 g	231 g	255 g
Torque for connection terminals	0.6 N m		
Connection to base module	via connection terminals		propriertary 5-way bus (T-connector)
Screw terminals	yes		
Pluggable connection terminals	yes		
Min. connection cross section	0.5 mm²		
Max. connection cross section	2.5 mm²		
Certified in accordance with	EN ISO 13849-1 IEC 61508 IEC 62061 UL 508 / CSA 22.2		–
CE label	yes		