elobau GmbH & Co. KG
Zeppelinstr. 44
88299 Leutkirch, Germany

Tel.: +49 (0) 7561 970-0
Fax: +49 (0) 7561 970-100



Conector K04.00


Para sensores com conector M18 com 4-pinos.

Especificação Técnica

- Cabos pré-montados com extremidade aberta e descascada
- Conector M8 compatível com todos os sensores com conector circular de 4 pinos e rosca M8
- Elevada classe de proteção
- Vários comprimentos de cabo disponíveis

Desenho técnico


IMAGE 1/3

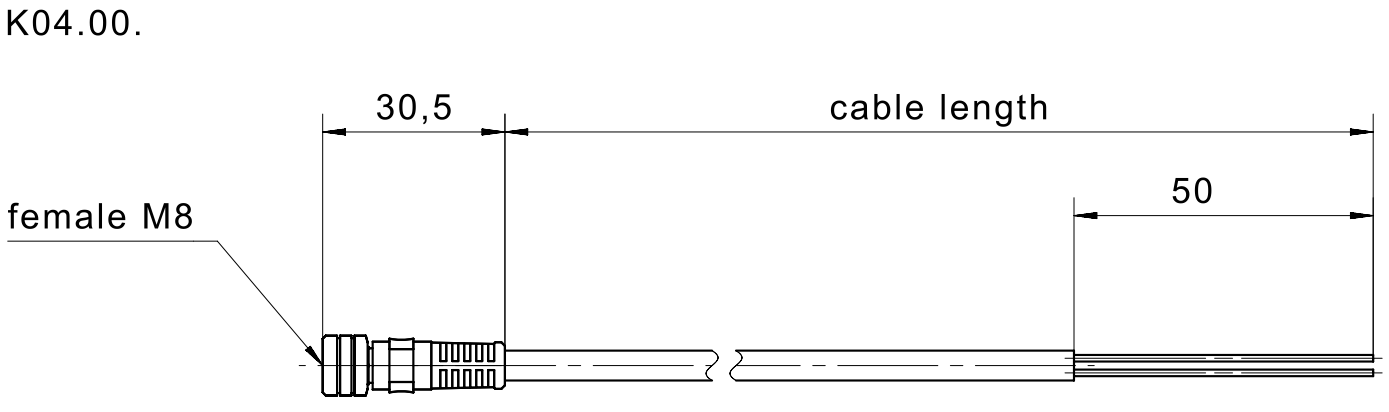

elobau GmbH & Co. KG
Zeppelinstr. 44
88299 Leutkirch, Germany

Tel.: +49 (0) 7561 970-0
Fax: +49 (0) 7561 970-100


IMAGE 2/3

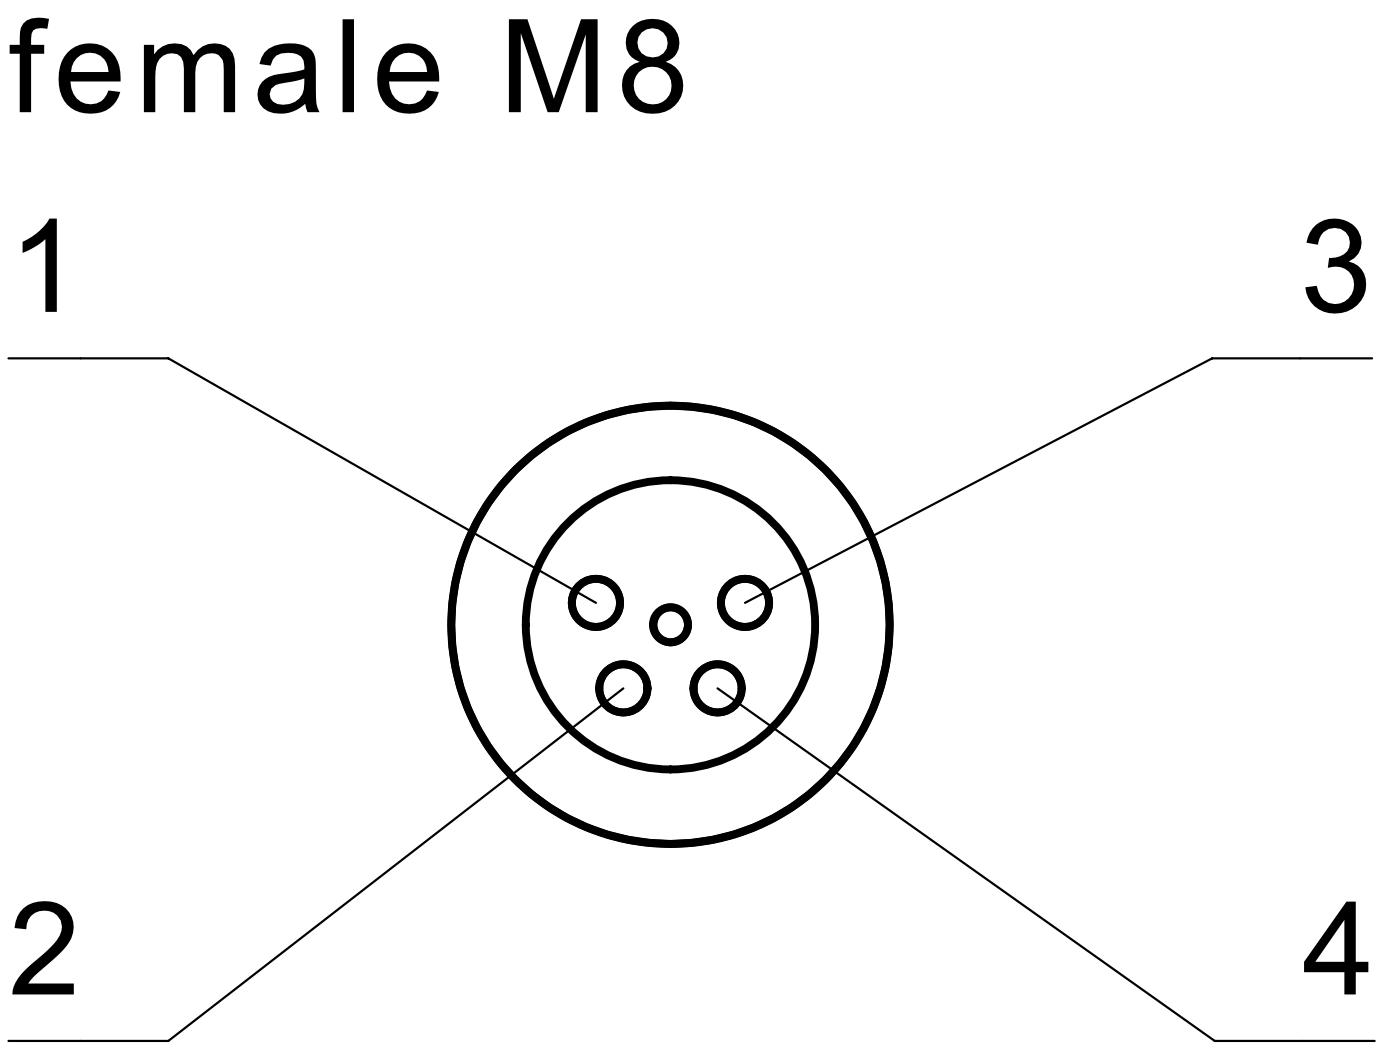

elobau GmbH & Co. KG
Zeppelinstr. 44
88299 Leutkirch, Germany

Tel.: +49 (0) 7561 970-0
Fax: +49 (0) 7561 970-100

IMAGE 3/3

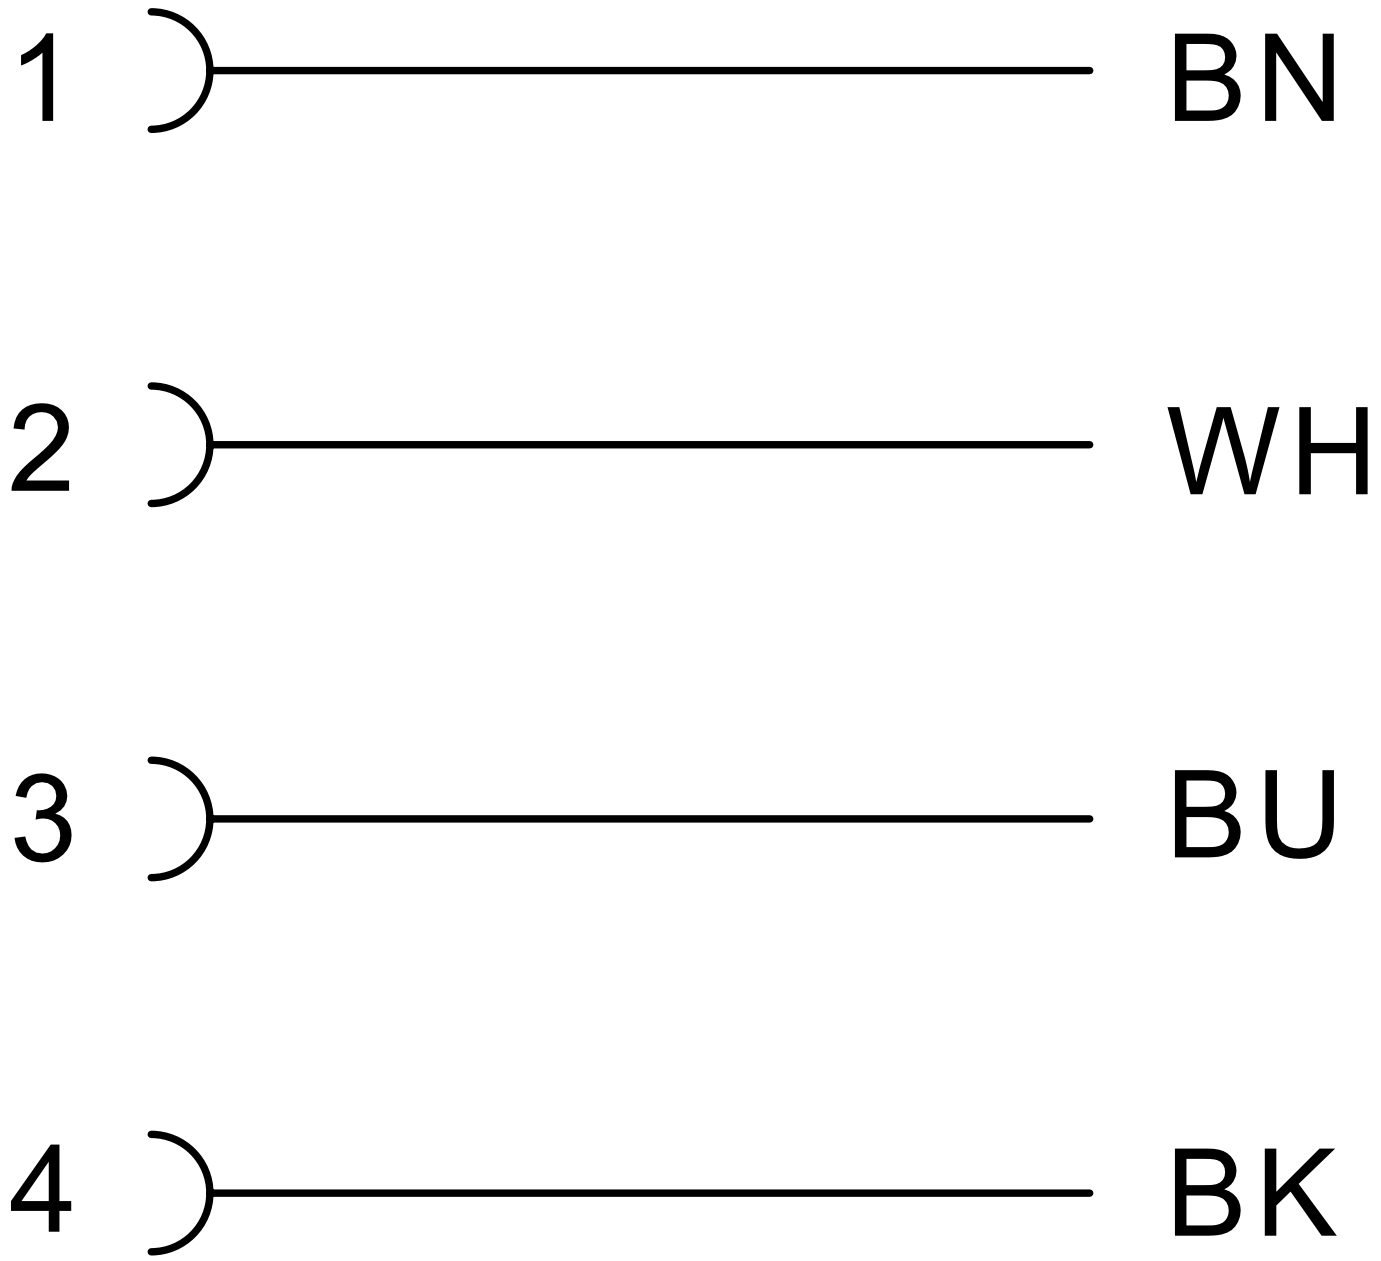

elobau GmbH & Co. KG
Zeppelinstr. 44
88299 Leutkirch, Germany

Tel.: +49 (0) 7561 970-0
Fax: +49 (0) 7561 970-100

Product options

IMAGE 1/1

ORDERING KEY

K04			
	G		Sheath material PVC, black
	H		Sheath material PUR, black
		001	Cable length 1 m
		003	Cable length 3 m
		005	Cable length 5 m
		000	Cable length 10 m
			Other cable materials and cable lengths on request

elobau GmbH & Co. KG
Zeppelinstr. 44
88299 Leutkirch, Germany

Tel.: +49 (0) 7561 970-0
Fax: +49 (0) 7561 970-100

Características do artigo

Attribute	K04G...	K04H...
Max. switching current per contact	3 A	
Rated impulse withstand voltage (Uimp)	800 V	
Operating voltage max.	30 V DC	
Operating voltage max.	30 V AC	
Nut material	Brass	
Overmould material	PUR	
Cable material	PVC	PUR
Min. cable temperature range, moving	-25 °C	
Max. cable temperature range, moving	85 °C	
Min. cable temperature range, fixed installation	-25 °C	
Max. cable temperature range, fixed installation	85 °C	
Min. storage temperature	-25 °C	
Max. storage temperature	85 °C	
Torque for nuts	0,5 N m	
Connector type	M8 socket, straight	
Cable colour	Black	
Cable length	10 m	
Cable diameter	5 mm	
Number of pins	4	
Number of strands	4	
Wire cross section	0.25 mm²	
Cable type	LIYY	
Certified in accordance with	UL/CSA	