elobau
sustainable solutions

elobau GmbH & Co. KG
Zeppelinstr. 44
88299 Leutkirch, Germany

Tel.: +49 (0) 7561 970-0
Fax: +49 (0) 7561 970-100

elobau.com/pt-br/?p=28171
14/11/2026



Sensor de proximidade magnético 126

Especificação Técnica

- Sensor magnético
- Design compacto
- Carcaça em poliamida (PA)
- Ø6 x 30 mm
- Cabo em PVC

Desenho técnico

IMAGE 1/2


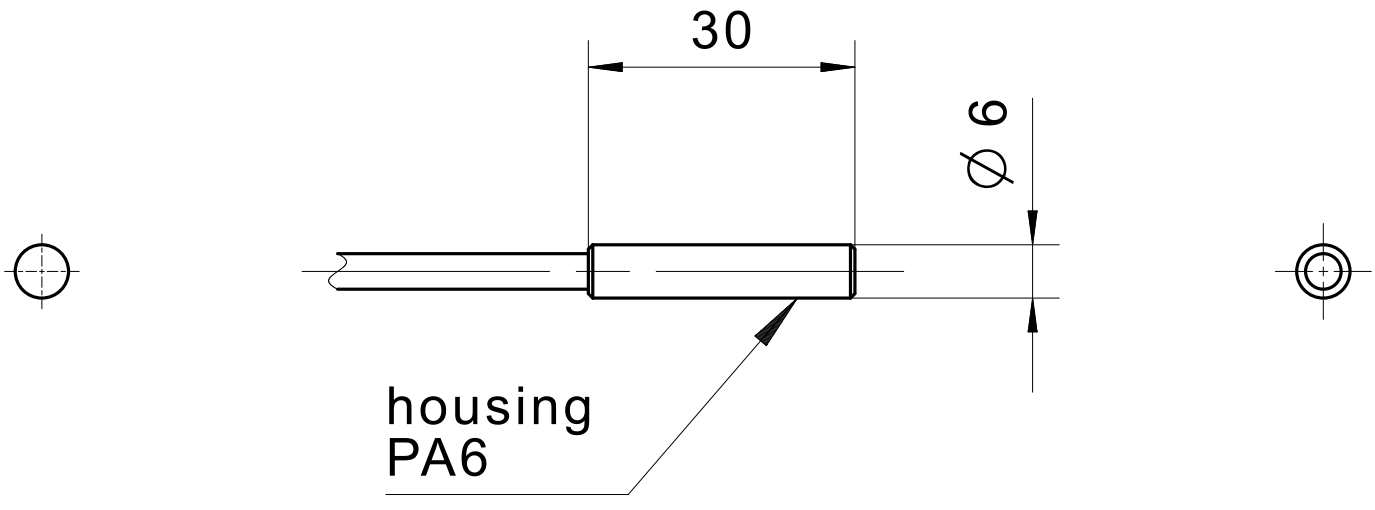


IMAGE 2/2

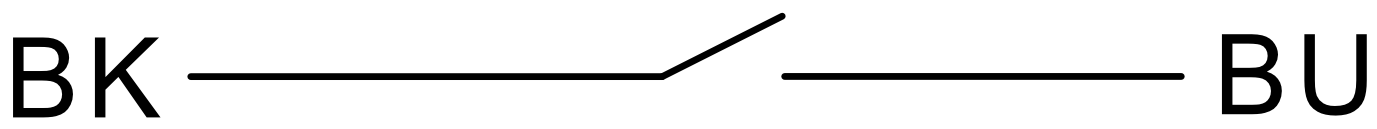


elobau GmbH & Co. KG
Zeppelinstr. 44
88299 Leutkirch, Germany

Tel.: +49 (0) 7561 970-0
Fax: +49 (0) 7561 970-100

Product options

IMAGE 1/2

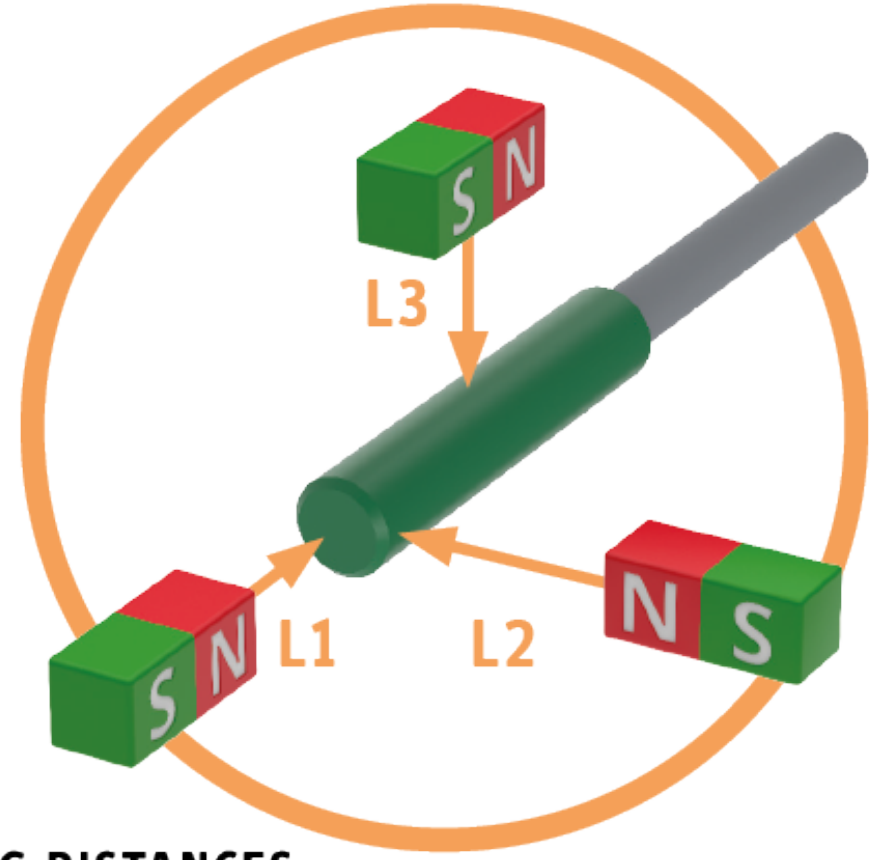

TYPICAL SWITCHING DISTANCES

	126210		
ACTUATORS	**L1**	**L2**	**L3**
324790	17 mm	13 mm	11 mm
300790	21 mm	17 mm	15 mm
300780	28 mm	20 mm	20 mm

Further actuators and switching distances on request

elobau GmbH & Co. KG
Zeppelinstr. 44
88299 Leutkirch, Germany

Tel.: +49 (0) 7561 970-0
Fax: +49 (0) 7561 970-100

IMAGE 2/2

ORDERING KEY

126			Magnetic sensor, reed contact
	210		N.O. – cable connection 1 m
			Other available cable lengths
		-3	3 m
		-5	5 m
		-10	10 m
			Other cable materials and cable lengths on request

elobau GmbH & Co. KG
Zeppelinstr. 44
88299 Leutkirch, Germany

Tel.: +49 (0) 7561 970-0
Fax: +49 (0) 7561 970-100

Características do artigo

Attribute	126210
Max. switching voltage	48 V DC
Max. switching voltage	48 V AC
Max. switching current	0.5 A
Max. switching power	10 W
Technology	Reed
Contact form	NO
LED display	No
Actuation	arbitrary
Switching principle	magnetic
Dimensions	D6 L=30
Housing design	cylindrical
Housing material	PA6
Cable material	PVC
Protection class	IP67 DIN EN 60529
Operating temperature min.	-25 °C
Max. operating temperature	75 °C
Min. storage temperature	-25 °C
Max. storage temperature	75 °C
Min. cable temperature range, moving	-25 °C
Max. cable temperature range, moving	80 °C
Min. cable temperature range, fixed installation	-40 °C
Max. cable temperature range, fixed installation	80 °C
Mounting type	inserted
Cable length	1 m