



## Sensor de proximidade magnético 128

### Especificação Técnica

- Sensor magnético
- Design compacto, com formato cilíndrico com rosca externa para fácil instalação
- Rosca M10 x 48 mm
- Cabo em PVC
- Tensão até 250 V

### Desenho técnico

IMAGE 1/2


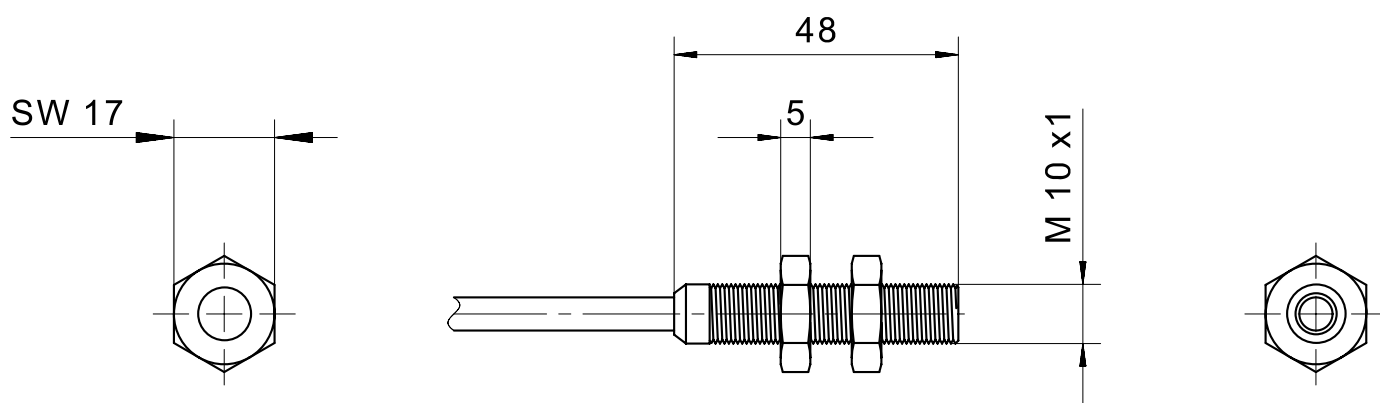


IMAGE 2/2

BN ————— BU

## Product options

IMAGE 1/2

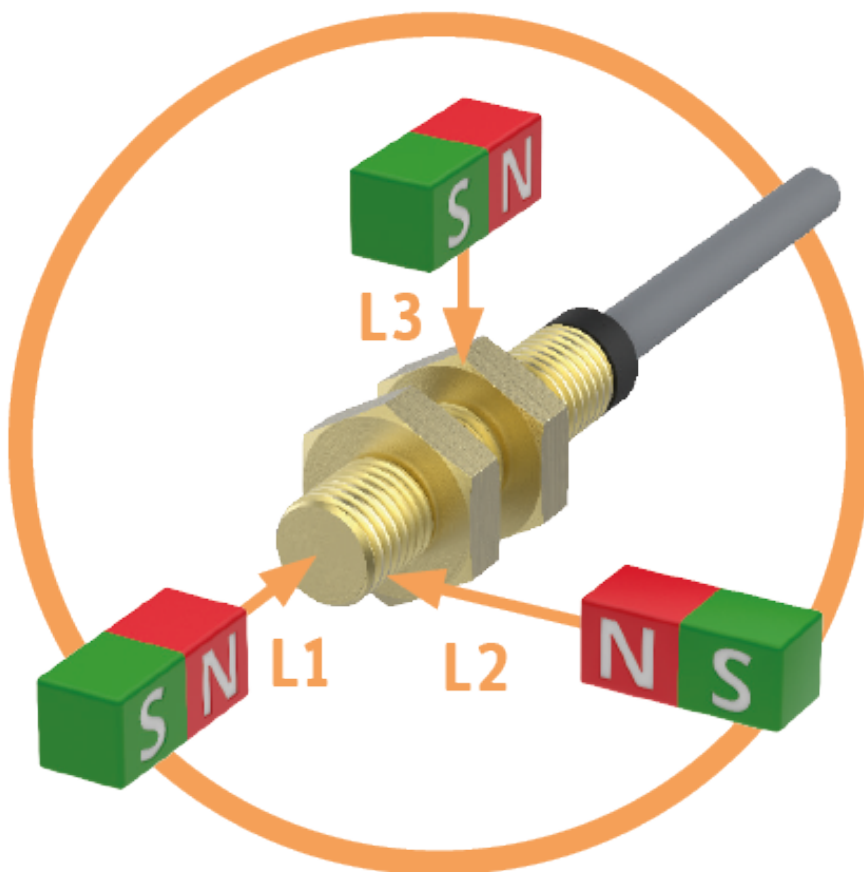

## TYPICAL SWITCHING DISTANCES

	128210		
ACTUATORS	L1	L2	L3
324790	15 mm	13 mm	9 mm
300790	19 mm	15 mm	12 mm
300780	26 mm	19 mm	18 mm

Further actuators and switching distances on request

IMAGE 2/2

## ORDERING KEY

128			Magnetic sensor, reed contact
	210		N.O. – cable connection 1 m, switching voltage max. 48 V
			Other contact forms on request
			<b>Other available cable lengths</b>
		-3	3 m
		-5	5 m
		-10	10 m
			Other cable materials and cable lengths on request

## Características do artigo

Attribute	128210	ED128210
Max. switching voltage	48 V DC	-
Max. switching voltage	48 V AC	-
Max. switching current	0.5 A	-
Max. switching power	10 W	-
Technology	Reed	-
Contact form	NO	-
LED display	No	-
Actuation	arbitrary	-
Switching principle	magnetic	-
Dimensions	M10x1 L=48	-
Housing design	cylindrical	-
Housing material	Messing	-
Nut material	Messing	-
Cable material	PVC	-
Protection class	IP67 DIN EN 60529	-
Operating temperature min.	-25 °C	-
Max. operating temperature	75 °C	-
Min. storage temperature	-25 °C	-
Max. storage temperature	75 °C	-
Min. cable temperature range, moving	-5 °C	-
Max. cable temperature range, moving	70 °C	-
Min. cable temperature range, fixed installation	-25 °C	-
Max. cable temperature range, fixed installation	70 °C	-
Mounting type	Thread	-
Cable length	1 m	-