



Sensor de ângulo 424S

O sensor de ângulo modelo 424S tem sinal de saída redundante, portanto é adequado para aplicações que exijam maior grau de segurança. O sensor tem um range de medição de 30° até 120°. Confiabilidade de medição e uma elevada vida útil ao produto devido à tecnologia de sensores de efeito Hall. O sensor pode ser usado em manipuladores telescópicos, plataformas elevatórias, veículos fora de estrada, entre outros.

- Durabilidade e confiabilidade de medição devido à tecnologia de sensores de efeito Hall
- Classe de proteção IP67
- Temperatura de trabalho -40 °C até +85 °C
- Resolução 0.1°
- Sinal de saída em tensão ou corrente
- Sinal de saída digital (push-pull / high-side / low-side) até 1.5A
- Conector AMP (Micro Quadlock) ou Deutsch DT04-6P

IMAGE 2/4

424S...

Deutsch DT06-6S male

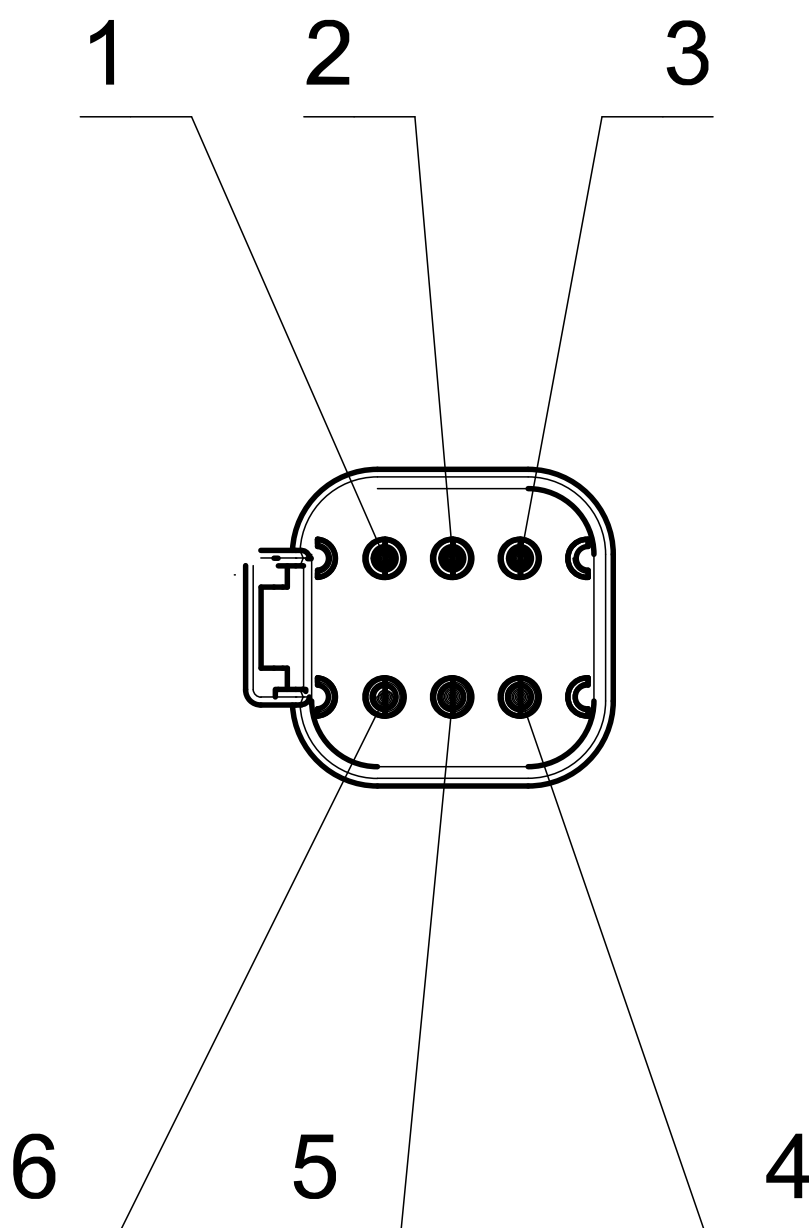


IMAGE 3/4

424S...


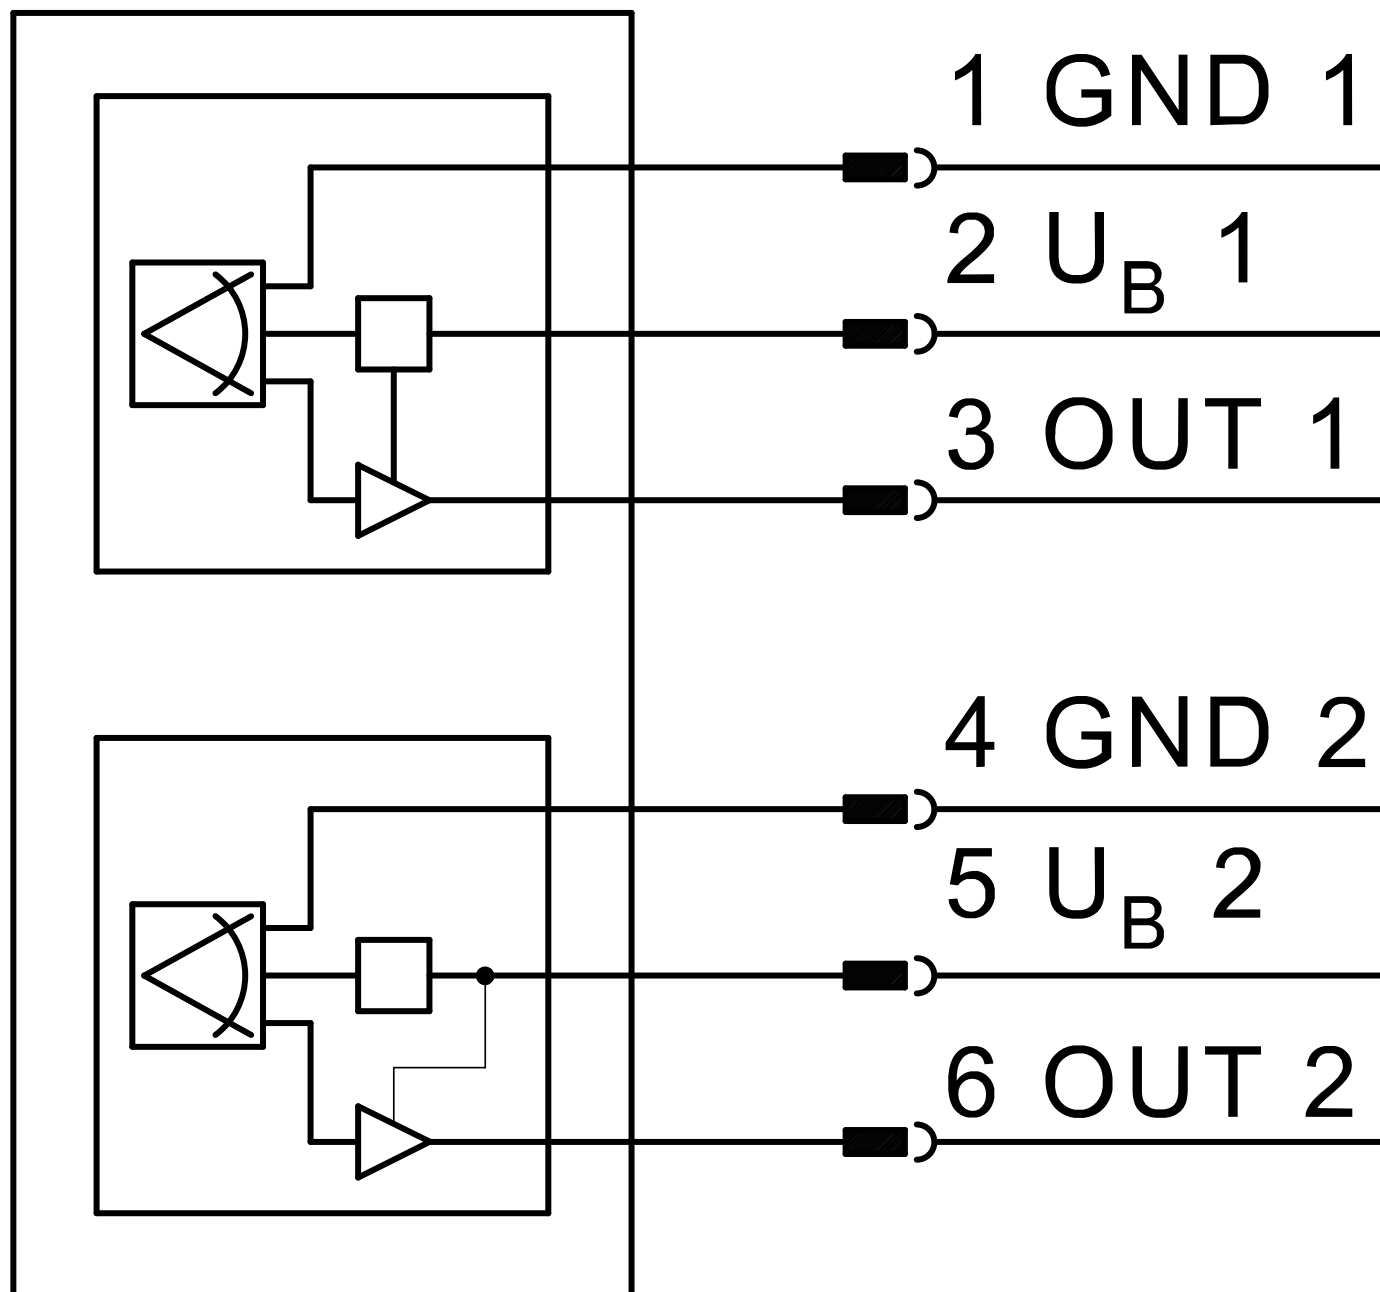



IMAGE 4/4

424S...

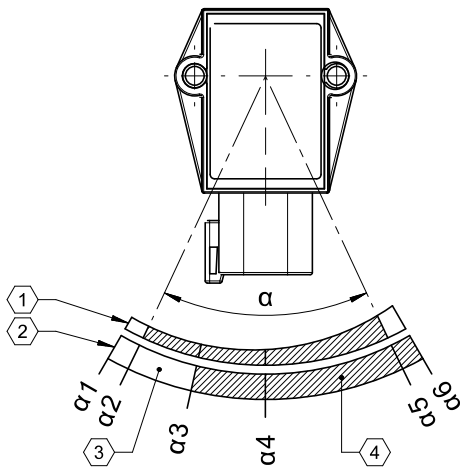


- ① OUT 1: analogue CCW (counter clock wise)
- ② OUT 2: digital output - push pull / high side
- ③ low
- ④ high

424S...

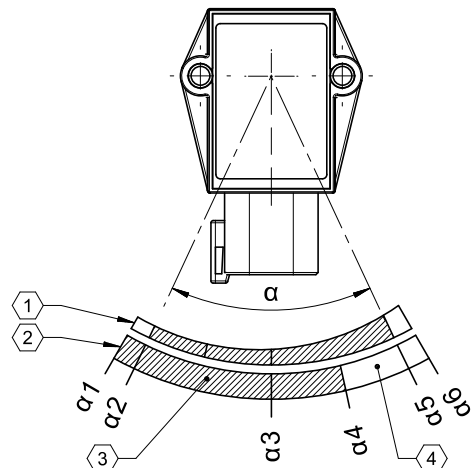


- ① OUT 1: analogue CCW (counter clock wise)
- ② OUT 2: digital output - push pull / low side
- ③ high
- ④ low

424S...

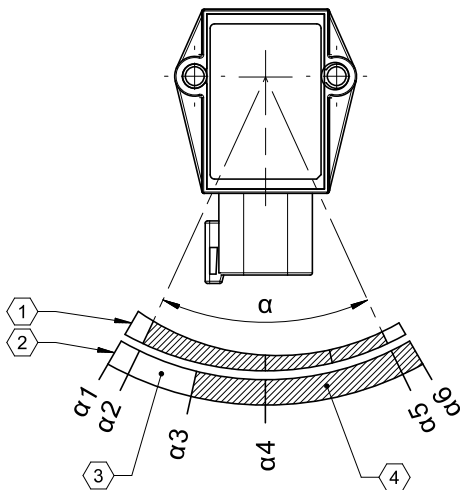

- ① OUT 1: analogue CW (clock wise)
- ② OUT 2: digital output - push pull / high side
- ③ low
- ④ high

424S...

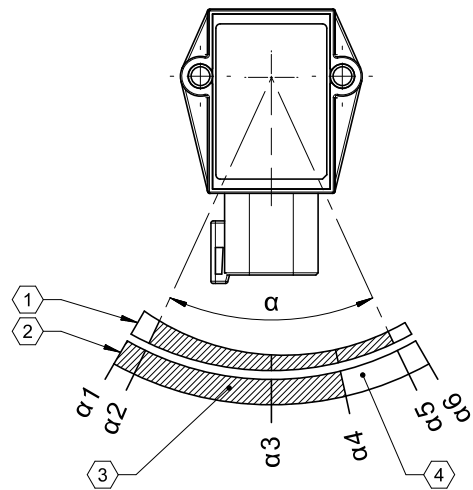

- ① OUT 1: analogue CW (clock wise)
- ② OUT 2: digital output - push pull / low side
- ③ high
- ④ low

Product options

IMAGE 1/1

ORDERING KEY

424S								Angle sensor 120°, analogue/switching output
								Connection
	A							AMP connector
	D							Deutsch connector
								Analogue output
			10					1 - 5 V
			11					4 - 20 mA
			16					0.5 - 4.5 V ratiometric
			17					0.5 - 4.5 V
								Switching output
					DH			High-side switch
					DL			Low-side switch
					DS			Push-pull
								Code number (specified by elobau)
						001		3-digit code number
								Accessories
							B	Operating lever mounted
								Selection of angle measuring range ¹ (selectable in 5° increments) between 30° and 120°
								xxx°
								Selection of switching point ¹ (selectable in 5° increments) between 0° and 120°
								xxx°
								¹ Please specify when ordering.

Standard

Optional (on request)

Options (on request)

Customer-specific shaft end

Special characteristic curve for output signal

Customised connection

Selection of direction of rotation CCW/CW

Switching output without analogue output

Special angle between 30°-120° (0-120°) ex-works

Características do artigo

Attribute	424SD11D....	424SD16D....	424SD17D....	ED424SD11D....	ED424SD16D....	ED424SD17D....
Polarity reversal protection	yes			-		
Output signal min.	-	0.5 V DC		-		
Output signal max.	-	4.5 V DC		-		
Output signal min.	4 mA	-				
Output signal max.	20 mA	-				
Output signal - centre position/zero position	-	2.5 V DC		-		
Output signal - centre position/zero position	12 mA	-				
Output signal - switching point	Selectable (Highside, Lowside, Push-Pull)			-		
Resolution	0.1 °			-		
EMC Agricultural and forestry machines (Norm)	EN ISO 14982 pulse 5b: max. voltage 54V (absolute), functional status C for pulse 1 and 4	EN ISO 14982 conducted disturbance not applicable for 5V supply	EN ISO 14982 pulse 5b: max. voltage 54V (absolute), functional status C for pulse 1 and 4	-		
EMC Earth-moving and building construction machinery (Norm)	DIN EN ISO 13766-1 pulse "load dump": max. voltage 54V (absolute)	DIN EN ISO 13766-1 conducted disturbance not applicable for 5V supply	DIN EN ISO 13766-1 pulse "load dump": max. voltage 54V (absolute)	-		
EMC Industrial trucks (Norm)	DIN EN 12895			-		
Operating voltage min.	9 V DC	4.5 V DC	9 V DC	-		
Operating voltage max.	32 V DC	5.5 V DC	32 V DC	-		
Max. overvoltage	(5min @ 25°C) 36 V DC	5.5 V DC	(5min @ 25°C) 36 V DC	-		
Current consumption	424SD11D.: 17.00 mA 424SD1.DH: 9.00 mA 424SD1.DL: 15.00 mA 424SD1.DS: 15.00 mA	424SD16D.: 9.00 mA 424SD1.DH: 9.00 mA 424SD1.DL: 15.00 mA 424SD1.DS: 15.00 mA	424SD17D.: 17.00 mA 424SD1.DH: 9.00 mA 424SD1.DL: 15.00 mA 424SD1.DS: 15.00 mA	-		
Load resistance min.	-	20000 Ohm	10000 Ohm	-		
Load resistance max.	9V: 150 Ohm > 12V: 350 Ohm	-				
Temperature coefficient	typ. +- 250 ppm/K			-		

Attribute	424SD11D....	424SD16D....	424SD17D....	ED424SD11D....	ED424SD16D....	ED424SD17D....
Typical linearity error	= $\pm 15^\circ \pm 0,2^\circ$ = $\pm 25^\circ \pm 0,4^\circ$ = $\pm 35^\circ \pm 1,0^\circ$ = $\pm 45^\circ \pm 2,0^\circ$ = $\pm 60^\circ \pm 5,0^\circ$				-	
Signal sequence	CCW (CW on request)				-	
Signal update rate	2000 Hz				-	
Outputs (quantity, type)	2				-	
Max. switching current	Highside / Lowside: 1500 mA Push-Pull: 0,25 mA				-	
Technology	Hall				-	
Angle measuring range - analogue output	30° - 120° (selectable in 5° increments)				-	
Angle range - switching output	0° - 120° (Selectable in 5° increments)				-	
Outputs	4...20mA + switching output	0,5...4,5V ratiometric + Switching output	0,5...4,5V + Switching output		-	
MTTF	424SD11D.: 72.2 a 424SD1.DH: 78.4 a 424SD1.DL: 87.1 a 424SD1.DS: 113.0 a	424SD16D.: 111.9 a 424SD1.DH: 78.4 a 424SD1.DL: 87.1 a 424SD1.DS: 113.0 a	424SD17D.: 79.6 a 424SD1.DH: 78.4 a 424SD1.DL: 87.1 a 424SD1.DS: 113.0 a		-	
Max. shaft load, axial	50 N				-	
Max. shaft load, radial	100 N				-	
Bearing	Ball bearing				-	
Mechanical stop	Optional				-	
Actuating lever	Optional (Accessories: 350210)				-	
Protection class	IP67 DIN EN 60529 / IPX9K ISO 20653				-	
Operating temperature min.	-40 °C				-	
Max. operating temperature	85 °C				-	
Min. storage temperature	-40 °C				-	
Max. storage temperature	105 °C				-	
Torque for fastening screws	2.5 N m				-	
Connector type	Deutsch DT04-6P				-	