



Módulo de fixação

O módulo de montagem é projetado para uso com o sensor de nível de imersão 20991102. Esse módulo pode conectar até 4 prensas-cabo aos quais os sensores são conectados. A conexão roscada permite maior flexibilidade na definição da altura do ponto de medição com o mínimo esforço de instalação.

- Para aplicação no sensor de nível de imersão 20991102
- Rosca G1 e G2
- Possibilita até 4 pontos de medição
- Altura do ponto de medição ajustável de acordo com a prensa-cabo
- Materiais: módulo em poliamida PA6 e vedação em borracha nitrílica

Desenho técnico

IMAGE 1/2



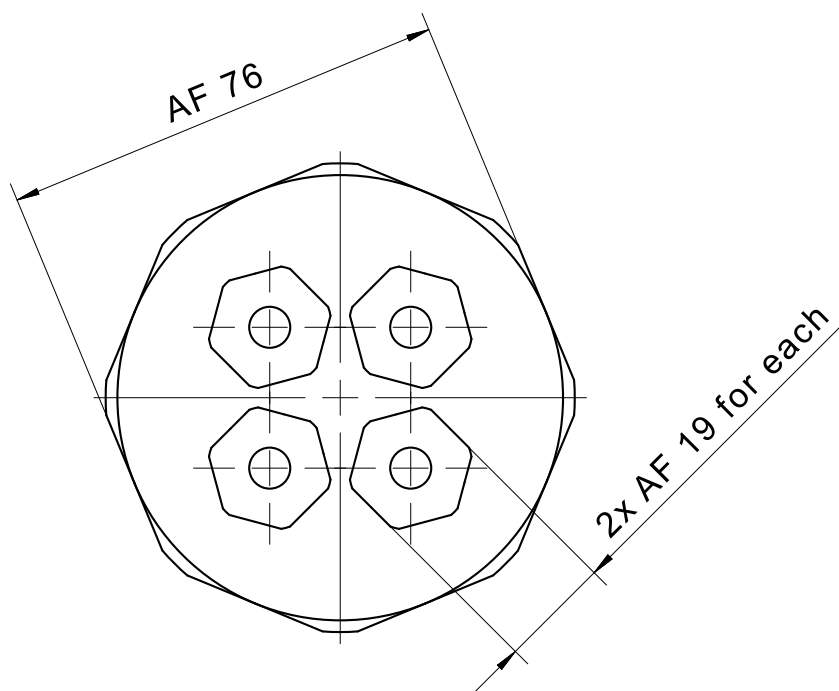


IMAGE 2/2

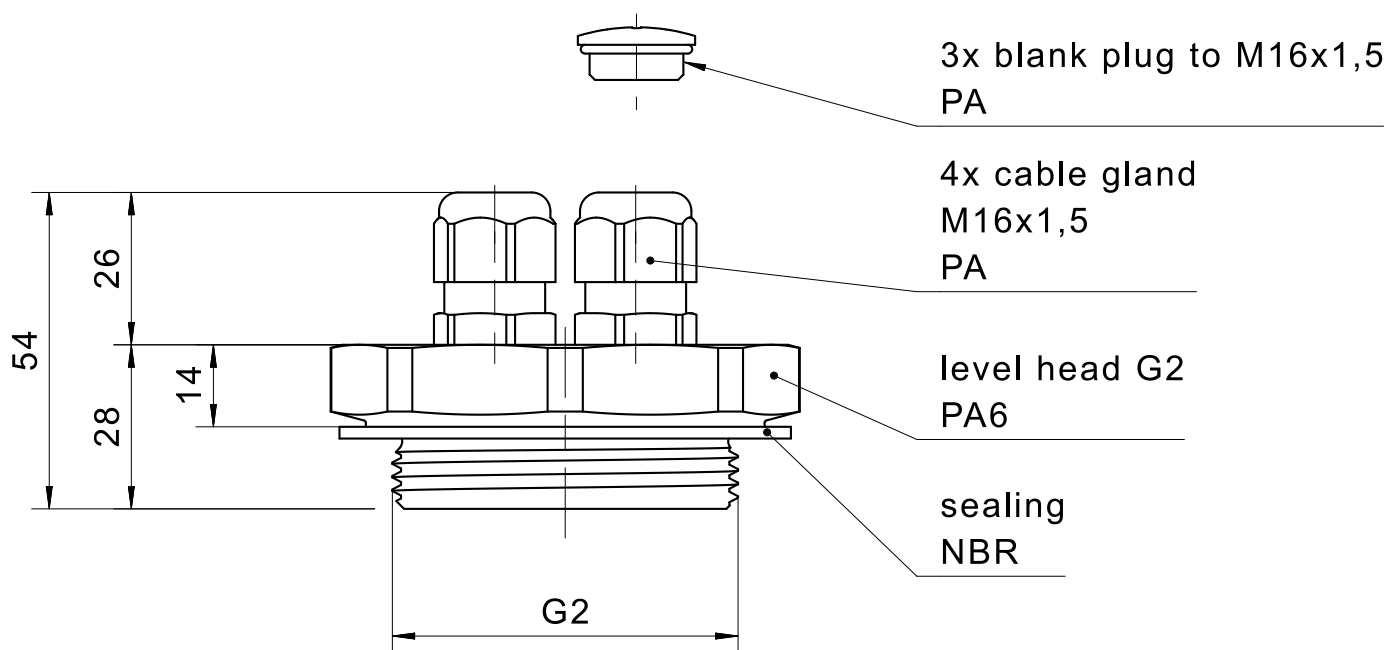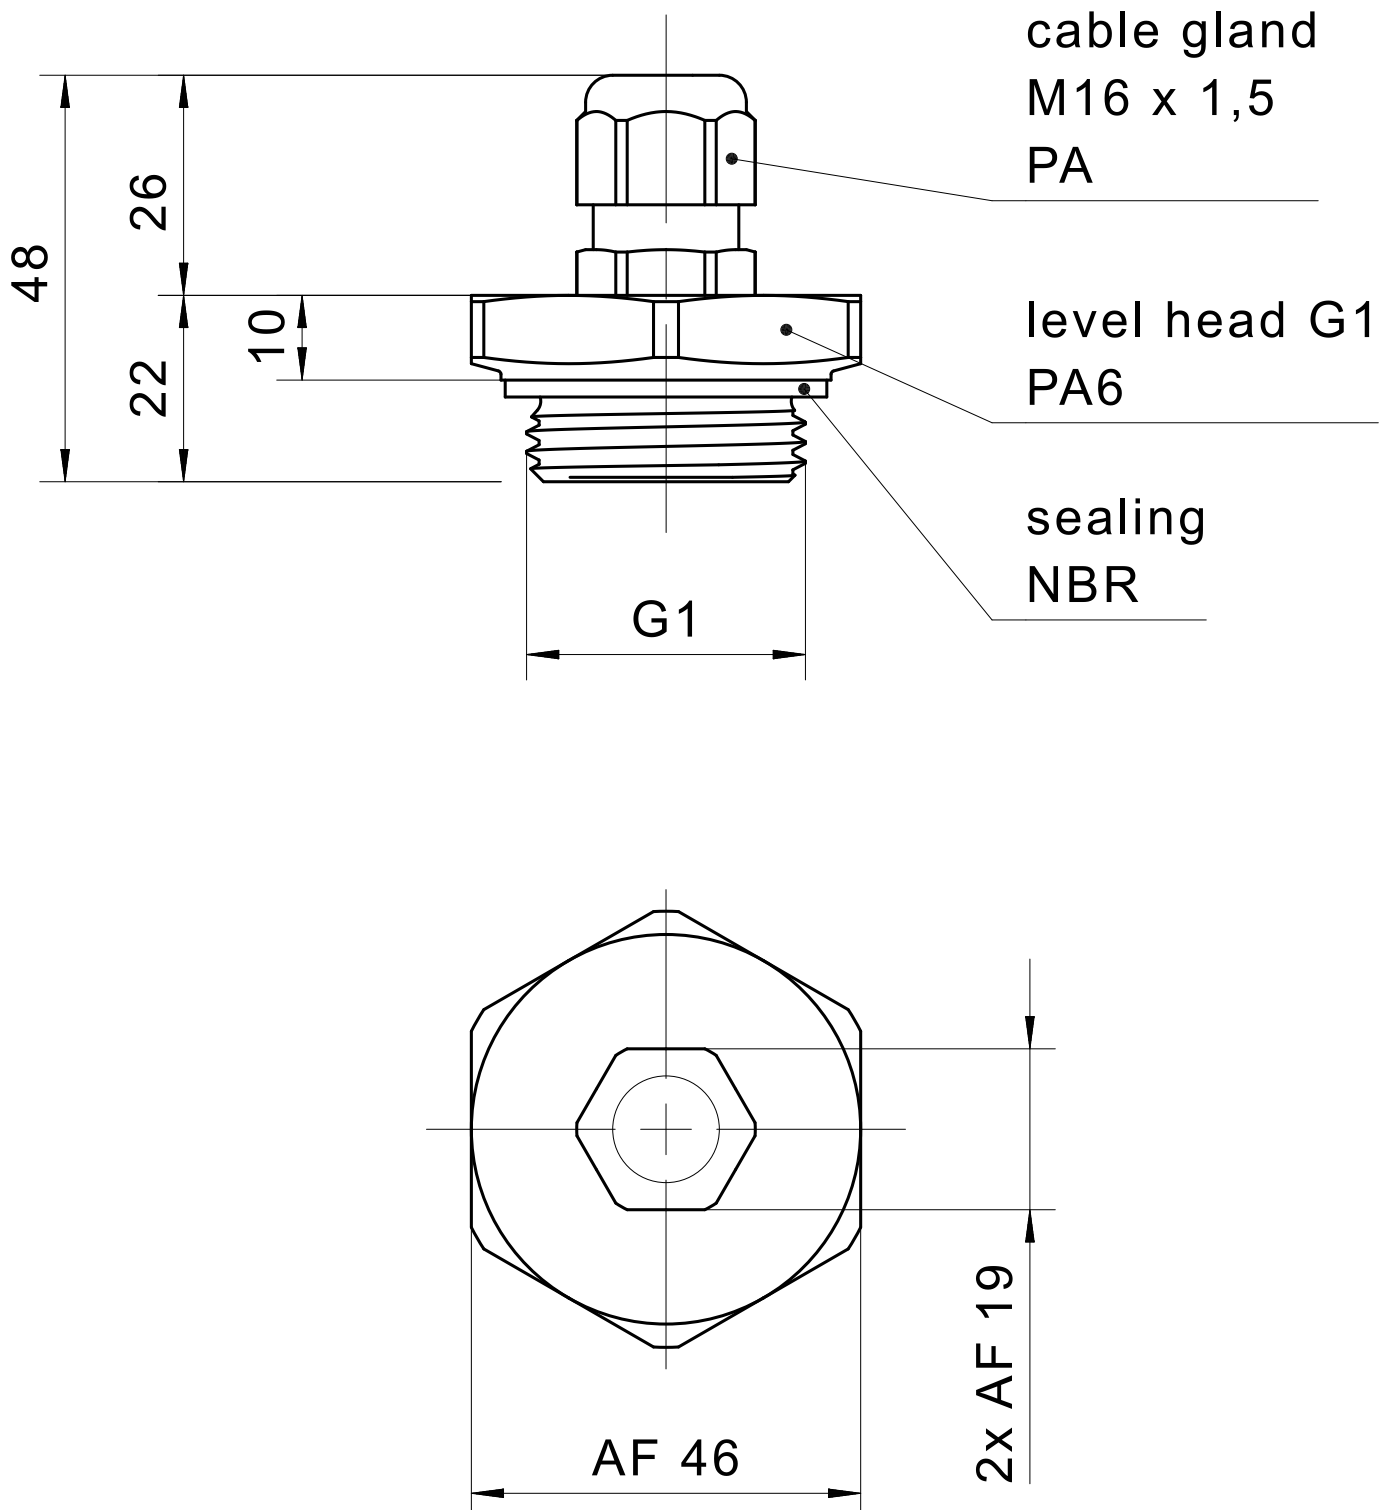

Características do artigo

| Attribute | 35020501 | 35020502 |
|----------------------------|--|--|
| Suitable for | 20991102 | |
| Included with delivery | 1xKabelverschraubung, 1xNiveauekopf, 1xDichtring | 4xKabelverschraubung, 1xNiveauekopf, 1xDichtring, 3xBlindstopfen |
| Material | PA6 GF30 | |
| Sealing material | NBR | |
| Operating temperature min. | -40 °C | |
| Operating temperature max. | 90 °C | |
| Installation | from above | |
| Mounting type | screwed | |
| Thread | G 1 | G 2 |
| Installation opening | G1 | G2 |
| Torque | 75 N m | 125 N m |
| Number of cable glands | 1 | 4 |